



CATALOG NO	VOLTS(V.)	__mH±10%	__AMPS(A)	APPROX WT-LBS
KLRUL360APTE3R	14.40	.061	360	185
KLRUL360DPTE3R	17.24	.073	360	185




LUG WIRE RANGE TWO 350MCM-4, AL. OR CU.  
FOR REACTOR.  
TIGHTENING TORQUE. 275 LB-IN

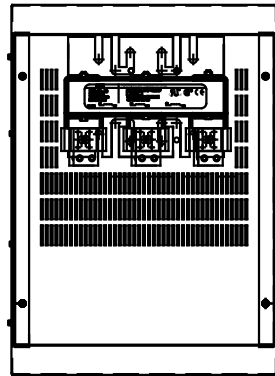

LABEL PLACED ON FRONT OF CABINET.



LABEL PLACED ON INSIDE WALL OF CABINET.

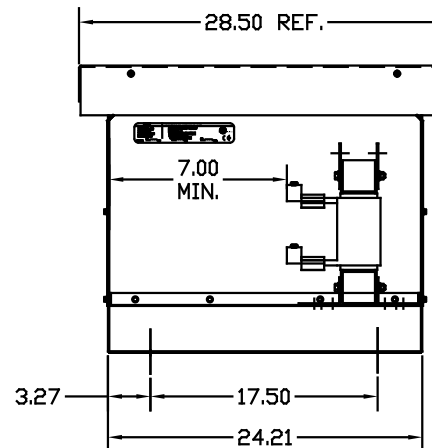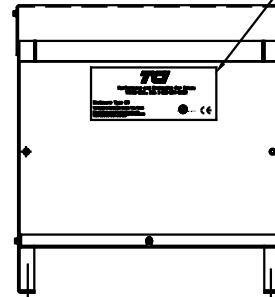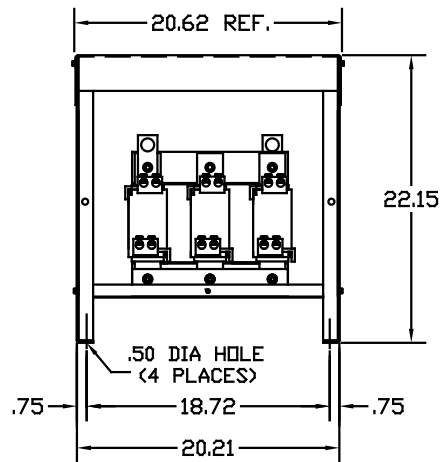

VENDOR LILLY POWDER COATINGS, INC.  
PRODUCT CODE 312E  
COLOR PEBBLE GRAY  
POWDER TYPE POLYESTER POLYURETHANE

PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R  
AND APPLIED PER A UL ACCEPTED DTV2 COATING PROGRAM.

CUSTOMER IS RESPONSIBLE FOR INSTALLATION  
TO MEET ALL LOCAL AND NATIONAL CODES

NO	REVISION	DATE	BY	TOLERANCES EXCEPT AS NOTED	7878 N. 86th STREET MILWAUKEE, WI 53224  <b>KLR FRAME L (ILSCO LUG) TYPE 3R ENCLOSURE</b>	DRN BY	DATE	DRG. NO.
				DECIMAL		DSW	10/06/04	B
				.XX ± .03		SCALE	APPROV.	
				.XXX ± .01		TO FIT		
				FRACTIONAL				
				± 1/32				
				ANGULAR				
				± 1/2°				
					KLRLE3R-5DG			
					SHT. 1 of 1			