


CATALOG NO	VOLTS(V.)	__mH±10%	__AMPS(A)	APPROX WT-LBS
KLRUL25ETB	28.75	1.76	25	23
KLRUL27ETB	28.75	1.63	27	23
KLRUL35CTB	24.00	1.05	35	23
KLRUL35ETB	28.75	1.258	35	23
KLRUL45CTB	24.00	.817	45	26
KLRUL45DTB	17.25	.587	45	26
KLRUL55ATB	14.40	.401	55	24
KLRUL55DTB	17.25	.480	55	24
KLRUL80BTB	7.20	.138	80	23
KLRUL80FTB	8.62	.165	80	23

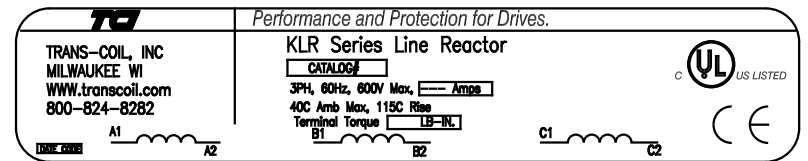


TORQUE(LB-IN)=CUSTOMER WIRE

35=1 AWG THRU 4 AWG
 30=6 AWG THRU 14 AWG
 25=16 AWG THRU 22 AWG

NOTE: A1, A2, B1, B2, C1, C2, MARKINGS ON COIL AND TERMINAL BLOCK FOR REFERENCE ONLY.



TERMINAL BLK MARKING

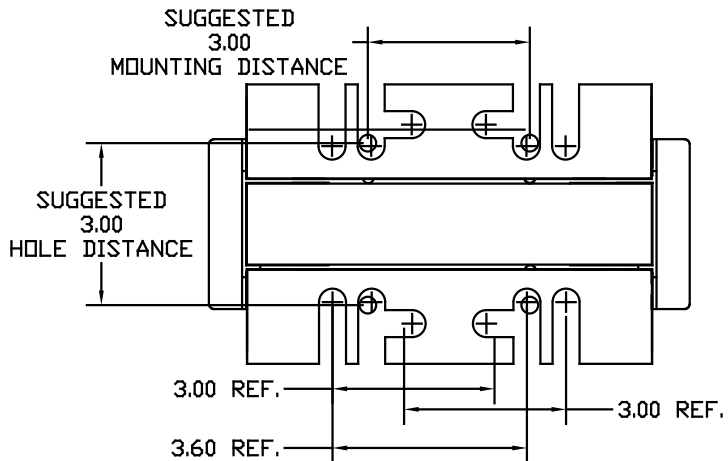

TOLERANCES EXCEPT AS NOTED				7878 N. 86th STREET MILWAUKEE, WI 53224
NO	REVISION	DATE	BY	
				KLRUL OPEN (FRAME F) LINE REACTOR
				DSW 05/10/04 SCALE TO FIT
				KLRULOPEN-7DG SHT.1 OF1