
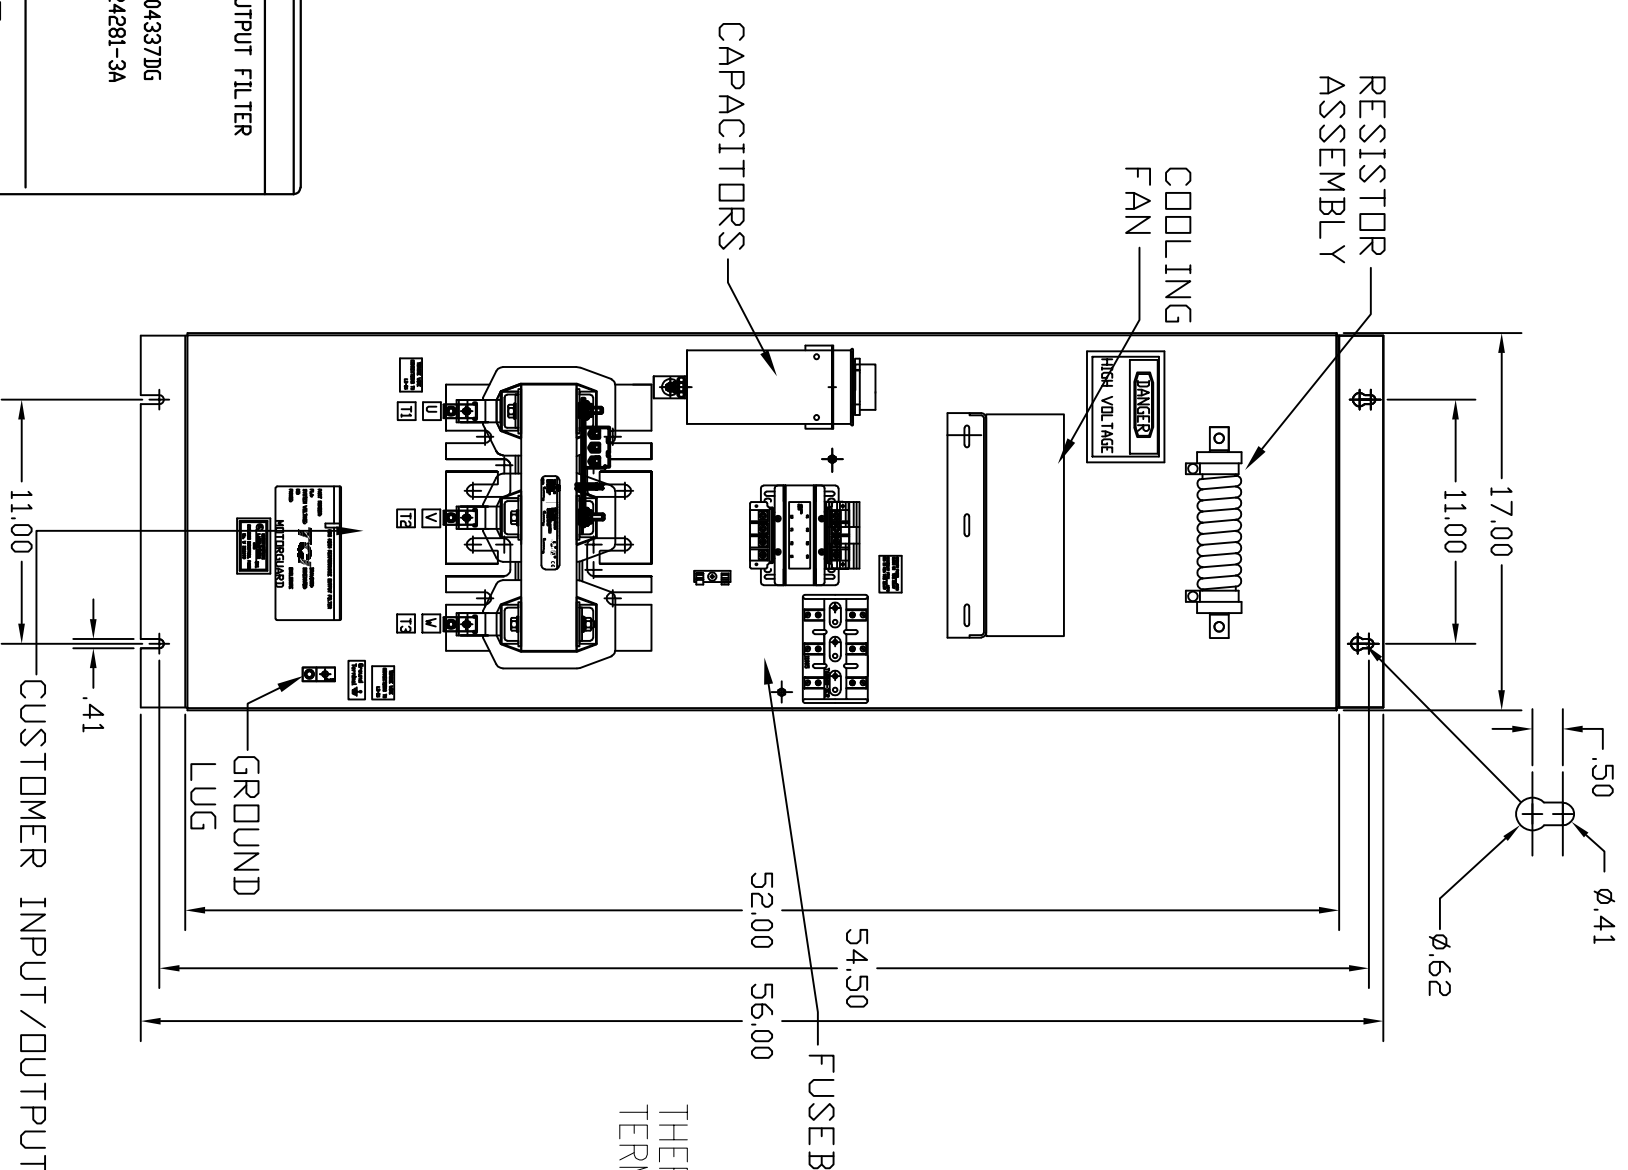


KMG130A00A

APPROX WEIGHT: 199LBS

FOR SCHEMATIC SEE DRAWING P/N 24281-3A

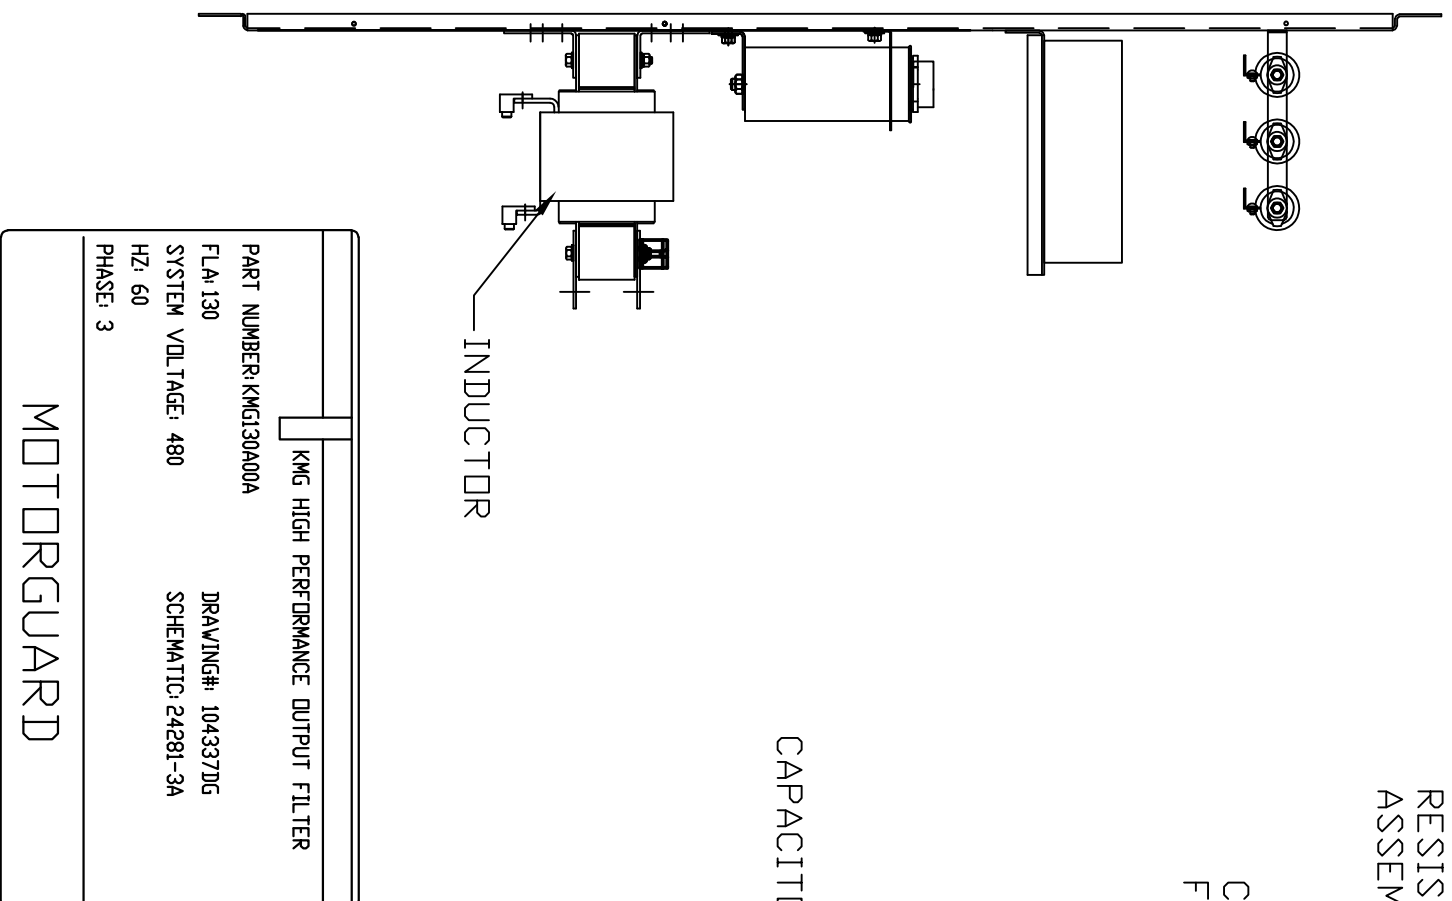

Thermal Switch Terminal Block

Wire Range: 18 AWG To 4 AWG.
 Torque: 20 LB-IN (2.3 Nm)
 Switch Opens on Temperature Rise
 Contact Rating: 6A @ 120 VAC

WIRE SIZE (AWG)	RATED TORQUE (IN-LBS)
2/0-3	50
4-6	45
8	40
10-14	35

CUSTOMER CONNECTIONS

 AND GROUND LUG.

CUSTOMER IS RESPONSIBLE FOR PROPER COOLING OF COMPONENTS IN CUSTOMERS ASSEMBLY
 CUSTOMER IS RESPONSIBLE FOR PROPER INSTALLATION OF ASSEMBLY IN ACCORDANCE WITH LOCAL AND NATIONAL CODES.

TOLERANCES EXCEPT AS NOTED		TOLERANCES EXCEPT AS NOTED	
	DECIMAL		DECIMAL
	XX ± .02		XX ± .02
	XXX ± .01		XXX ± .01
	FRACTIONAL		FRACTIONAL
	± 1/32		± 1/32
	ANGULAR		ANGULAR
	± 1/2°		± 1/2°
NO	REVISION	DATE	BY
B	5310 ADD THERMAL SWITCH TB	07/13/20	JRN
A	3042 LUG TORQ CHG	2/25/14	BMZ
Standard, Sine/Wave Filter Open, 100HP, 130AMP, 480V DWN BY: JSW DATE: 10/04/2010 SCALE: TO FIT DWG. NO.: 104337DG PART: B SHT. 1 OF 1		TOLERANCES EXCEPT AS NOTED DECIMAL XX ± .02 XXX ± .01 FRACTIONAL ± 1/32 ANGULAR ± 1/2°	