
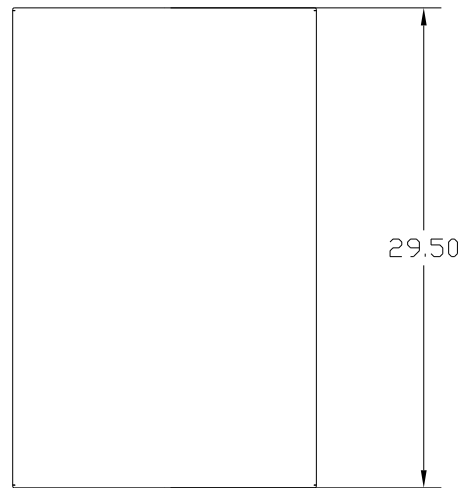


GENERAL PURPOSE, 1/3R, COLOR: GREY.


250 LBS : APPROX WEIGHT.

KMG HIGH PERFORMANCE OUTPUT FILTER	
PART NUMBER: KMG160AG010000	
FLA: 160	DRAWING#: 103887DG
SYSTEM VOLTAGE: 480V	SCHEMATIC: 26736
HZ: 80	
PHASE: 3	ENCLOSURE TYPE: 1/3R
MOTORGUARD	

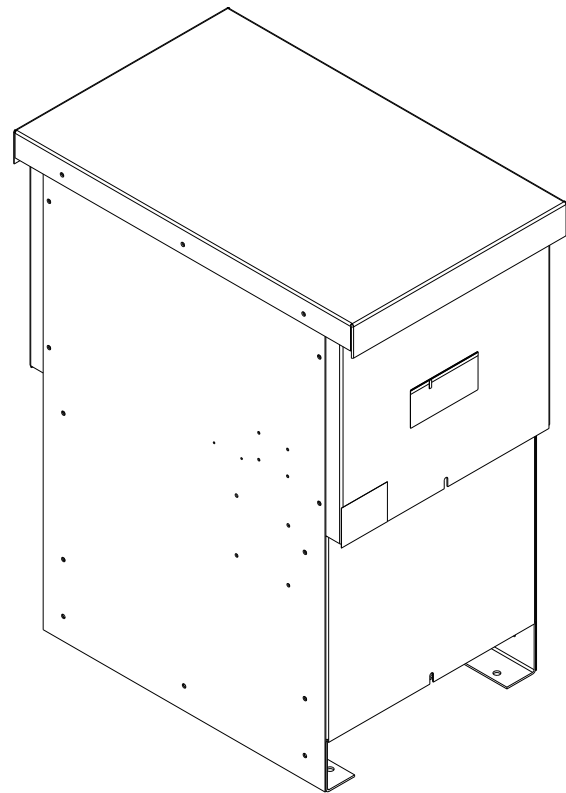


GROUND LUG
 WIRE RANGE: 250MCM-#6 AWG
 TORQUE: 275 LB-IN


CUSTOMER CONNECTIONS
 (.38 DIA HOLES 6 PLACES.)

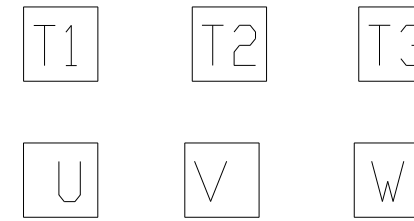

CUSTOMER WIRE ENTRANCE
 AND EXIT LOCATION.

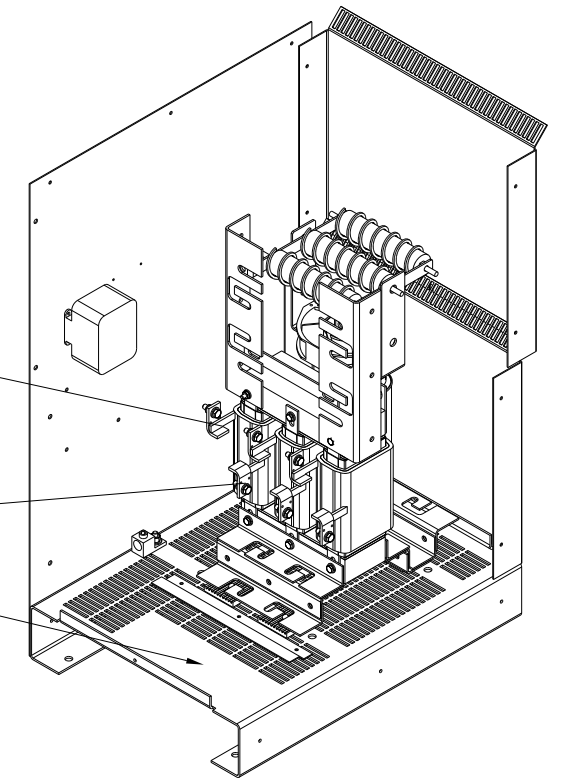

TCI
 MOTORGUARD

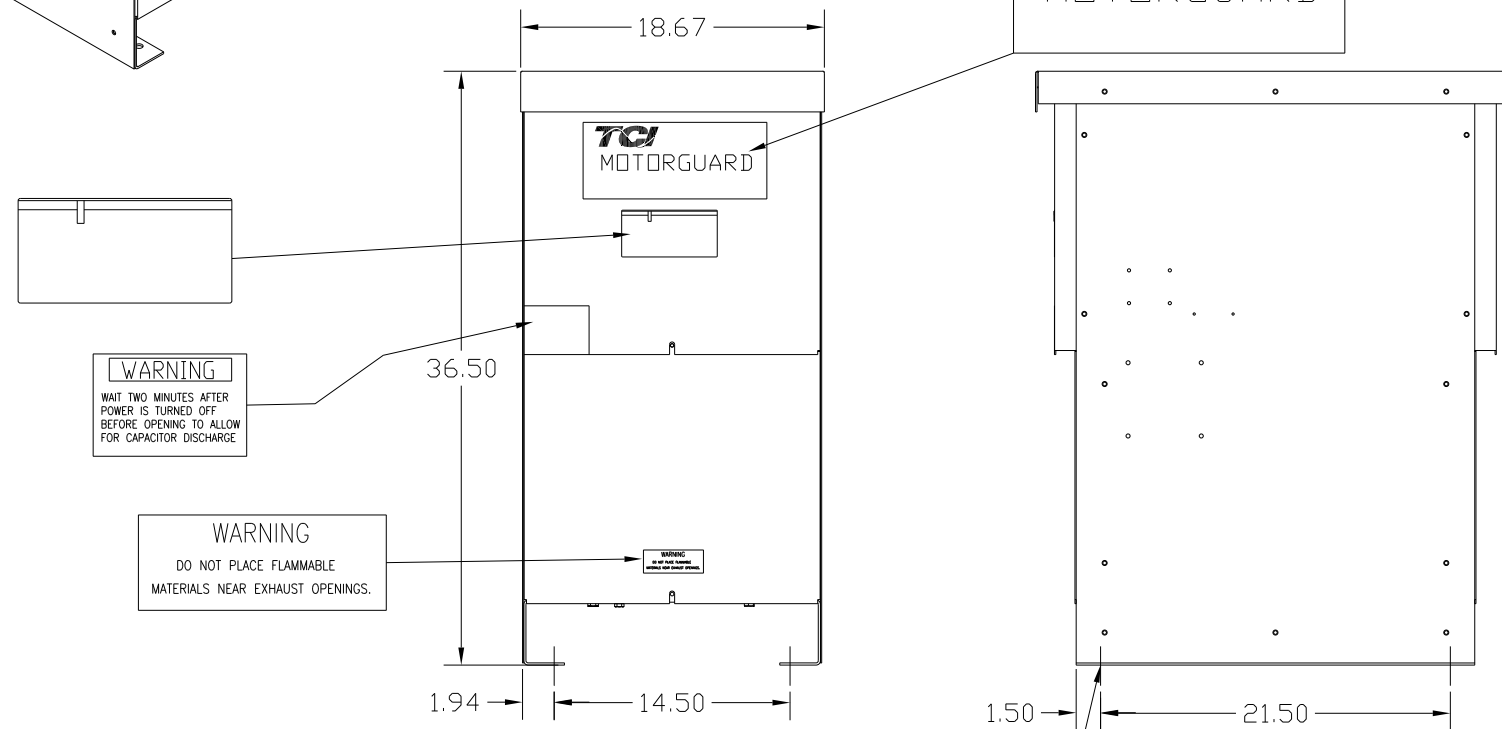


WARNING
 WAIT TWO MINUTES AFTER
 POWER IS TURNED OFF
 BEFORE OPENING TO ALLOW
 FOR CAPACITOR DISCHARGE

WARNING
 DO NOT PLACE FLAMMABLE
 MATERIALS NEAR EXHAUST OPENINGS.

.56 DIA HOLES
 4 PLACES.

DANGER
 HIGH VOLTAGE

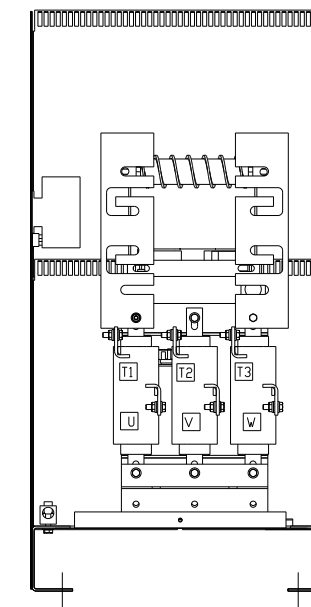

PRIMARY FUSES .75 AMPS
 CLASS CC TIME DELAY

11.69
 REF.

7.25
 REF.

10.25
 REF.

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
 TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

PART NUMBER: KMG160AG010000

FOR SCHEMATIC SEE DRAWING # 26736.

					TOLERANCES (EXCEPT AS NOTED) DECIMAL	7878 N. 86th STREET MILWAUKEE, WI 53224 KMG, LRC FILTER STANDARD 160 AMP 480/3/80, 1/3R
					.XX ± .03	
					.XXX ± .01	
					FRACTIONAL ± 1/32	
					ANGULAR ± 1/2°	DRN. BY DSW DATE 01/08/09 DWG. NO. 103887DG
NO	REVISION	DATE	BY		SCALE TO FIT	APPRVD. SHT. 1 OF 1