


SineWave Part Number	Schematic Drawing#	Approx Weight (LBS)
KMG200C00A	24281-23A	450
KMG200C00P	24281-23P	455

HorsePower (HP)	kVar	Max Amps	Voltage (V)	HZ	Phase
200	20	200	600	60	3

1
Thermal Switch Terminal Block

Wire Range: 18 AWG To 4 AWG.
Torque: 20 LB-IN (2.3 Nm)
Switch Opens on Temperature Rise
Contact Rating: 6A @ 120 VAC

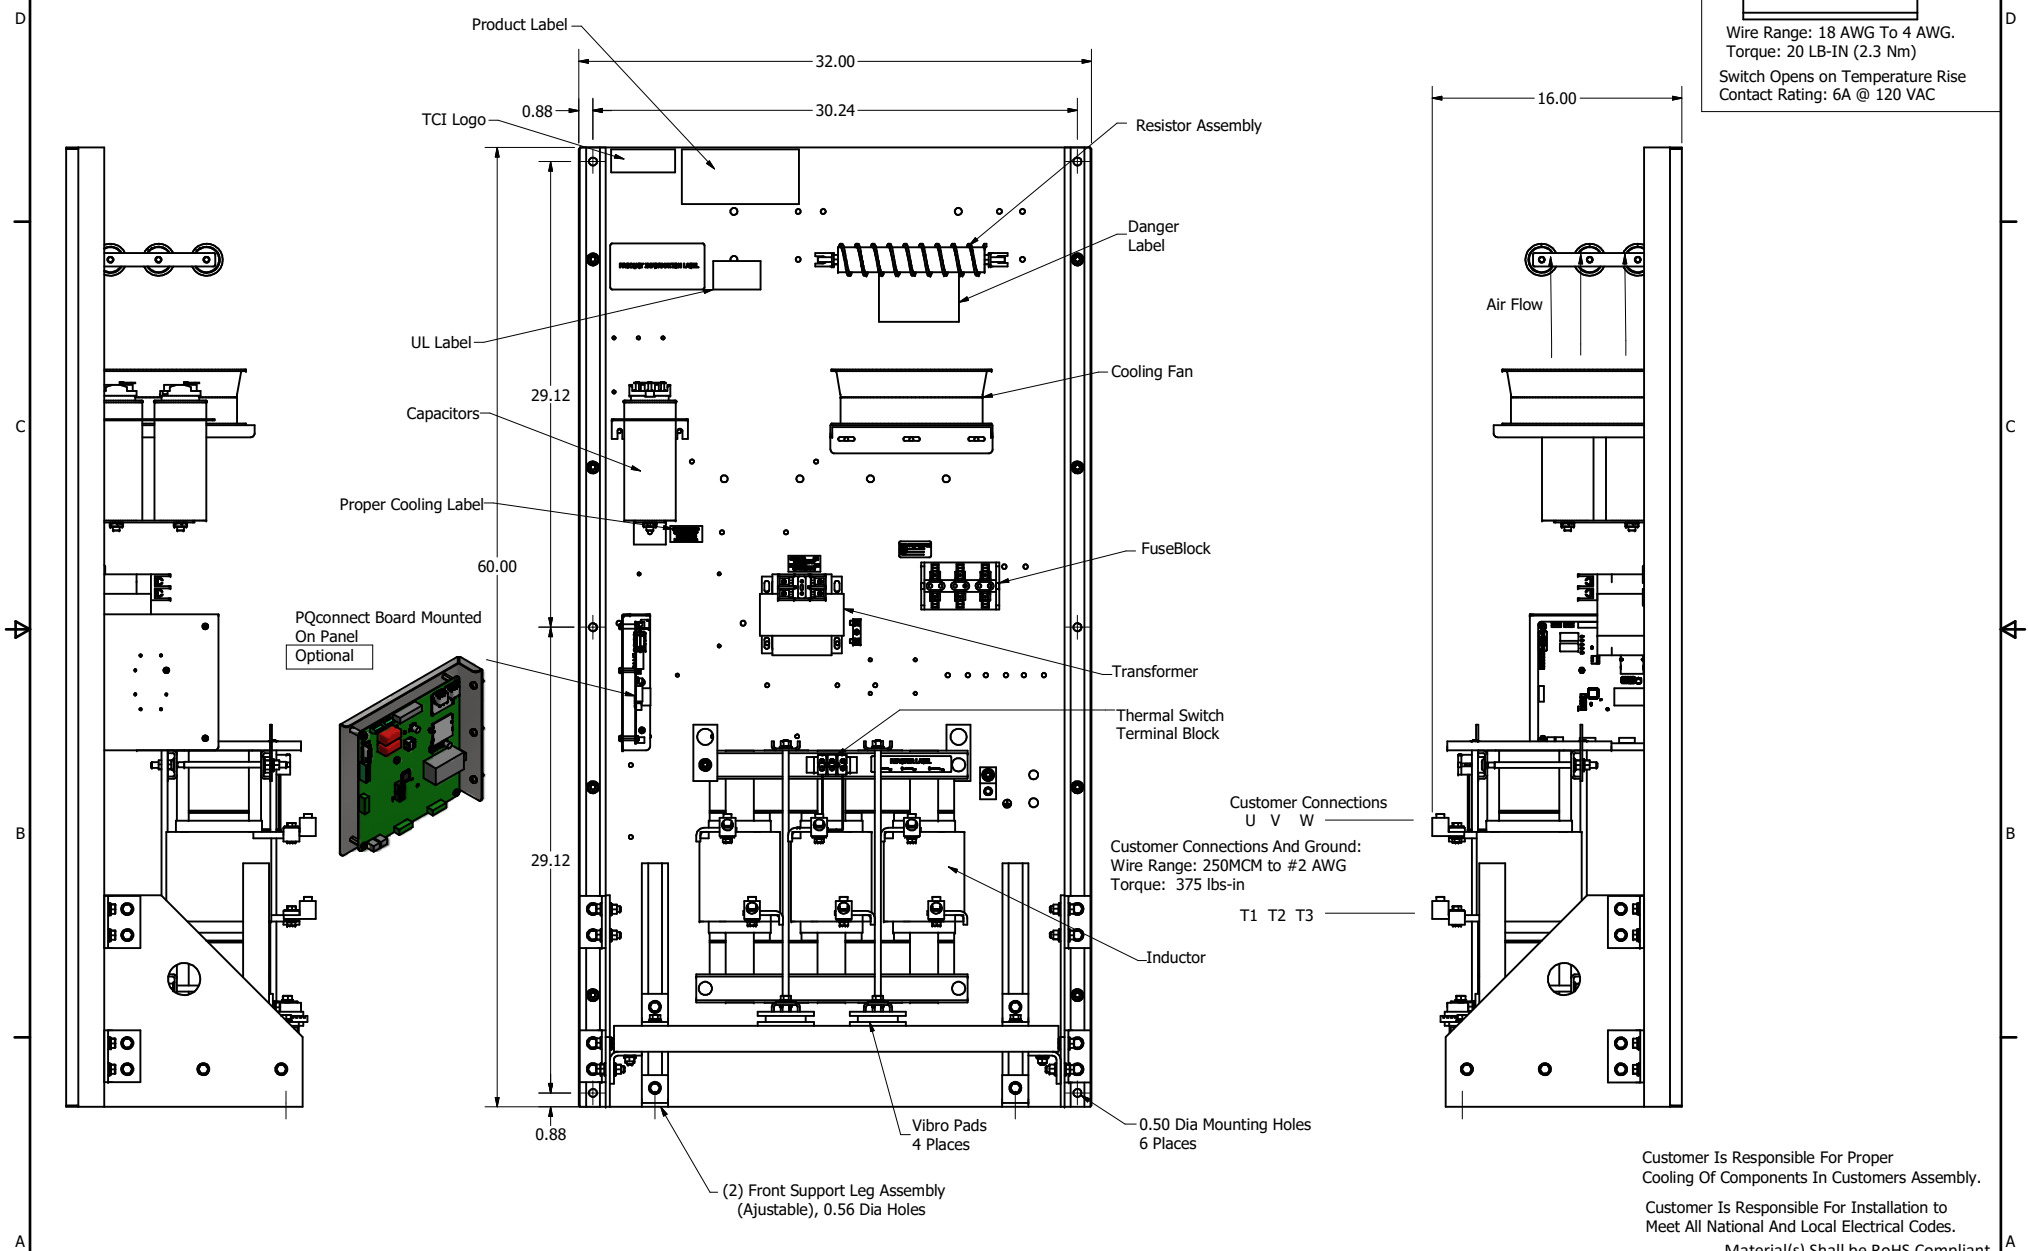

Customer Is Responsible For Proper Cooling Of Components In Customers Assembly.

Customer Is Responsible For Installation to Meet All National And Local Electrical Codes.

Material(s) Shall be RoHS Compliant

TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCI.					TOLERANCES (EXCEPT AS NOTED) DECIMAL .XX ± .25 .XXX ± .10 FRACTIONAL ± 1/16 ANGULAR ± 1°	TCI W132 N10611 Grant Drive Germantown, WI 53022 KMG200C00-, SineWave Filter Open Panel, 200HP, 600V 104427DG 1/5	
	B	Add PQconnect Board	9/24/2020	DSW	DATE		10/12/2016
	NO	REVISION	DATE	BY	SCALE		1/5