

GENERAL PURPOSE, 1/3R, COLOR: WHITE.

235 LBS : APPROX WEIGHT.

GROUND LUG  
WIRE RANGE: 2/0-#6 AWG  
TORQUE: 120 LB-IN



KMG HIGH PERFORMANCE OUTPUT FILTER  
PART NUMBER: KMG65CG3R0000  
FLA: 65 DRAWING#: 103923DG  
SYSTEM VOLTAGE: 600V SCHEMATIC: 26912  
HZ: 60  
PHASE: 3 ENCLOSURE TYPE: 1/3R  
**MOTORGUARD**

PART NUMBER: KMG65CG3R0000  
FOR SCHEMATIC SEE DRAWING# 26912.


CUSTOMER CONNECTIONS  
(.28 DIA HOLES 6 PLACES.)

T1 T2 T3  
U V W

CUSTOMER WIRE ENTRANCE  
AND EXIT LOCATION.

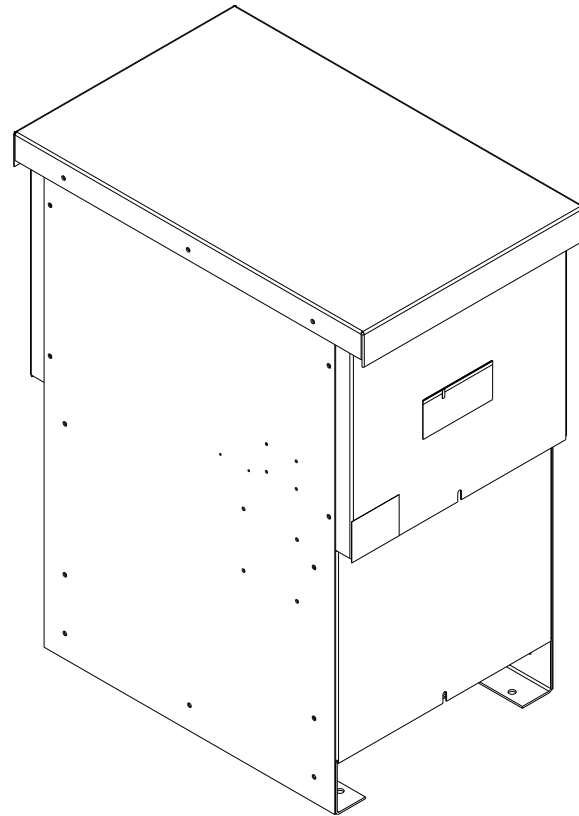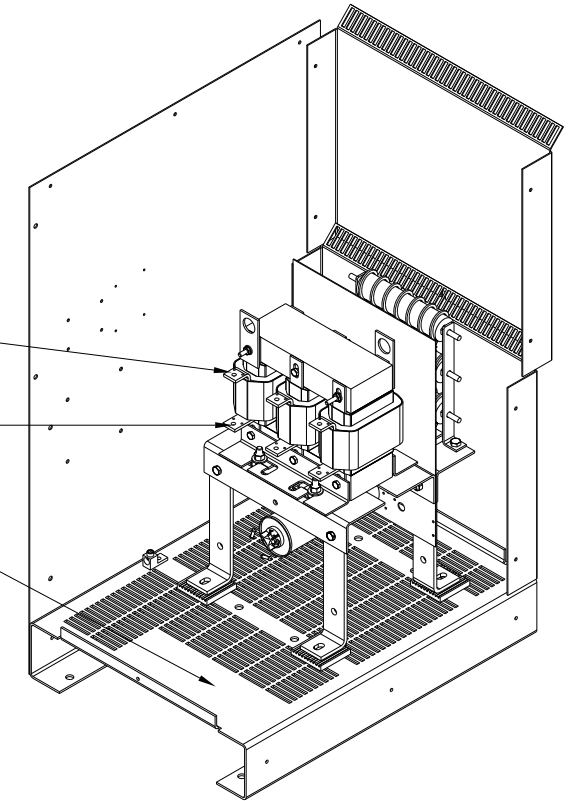

**TCI**  
MOTORGUARD

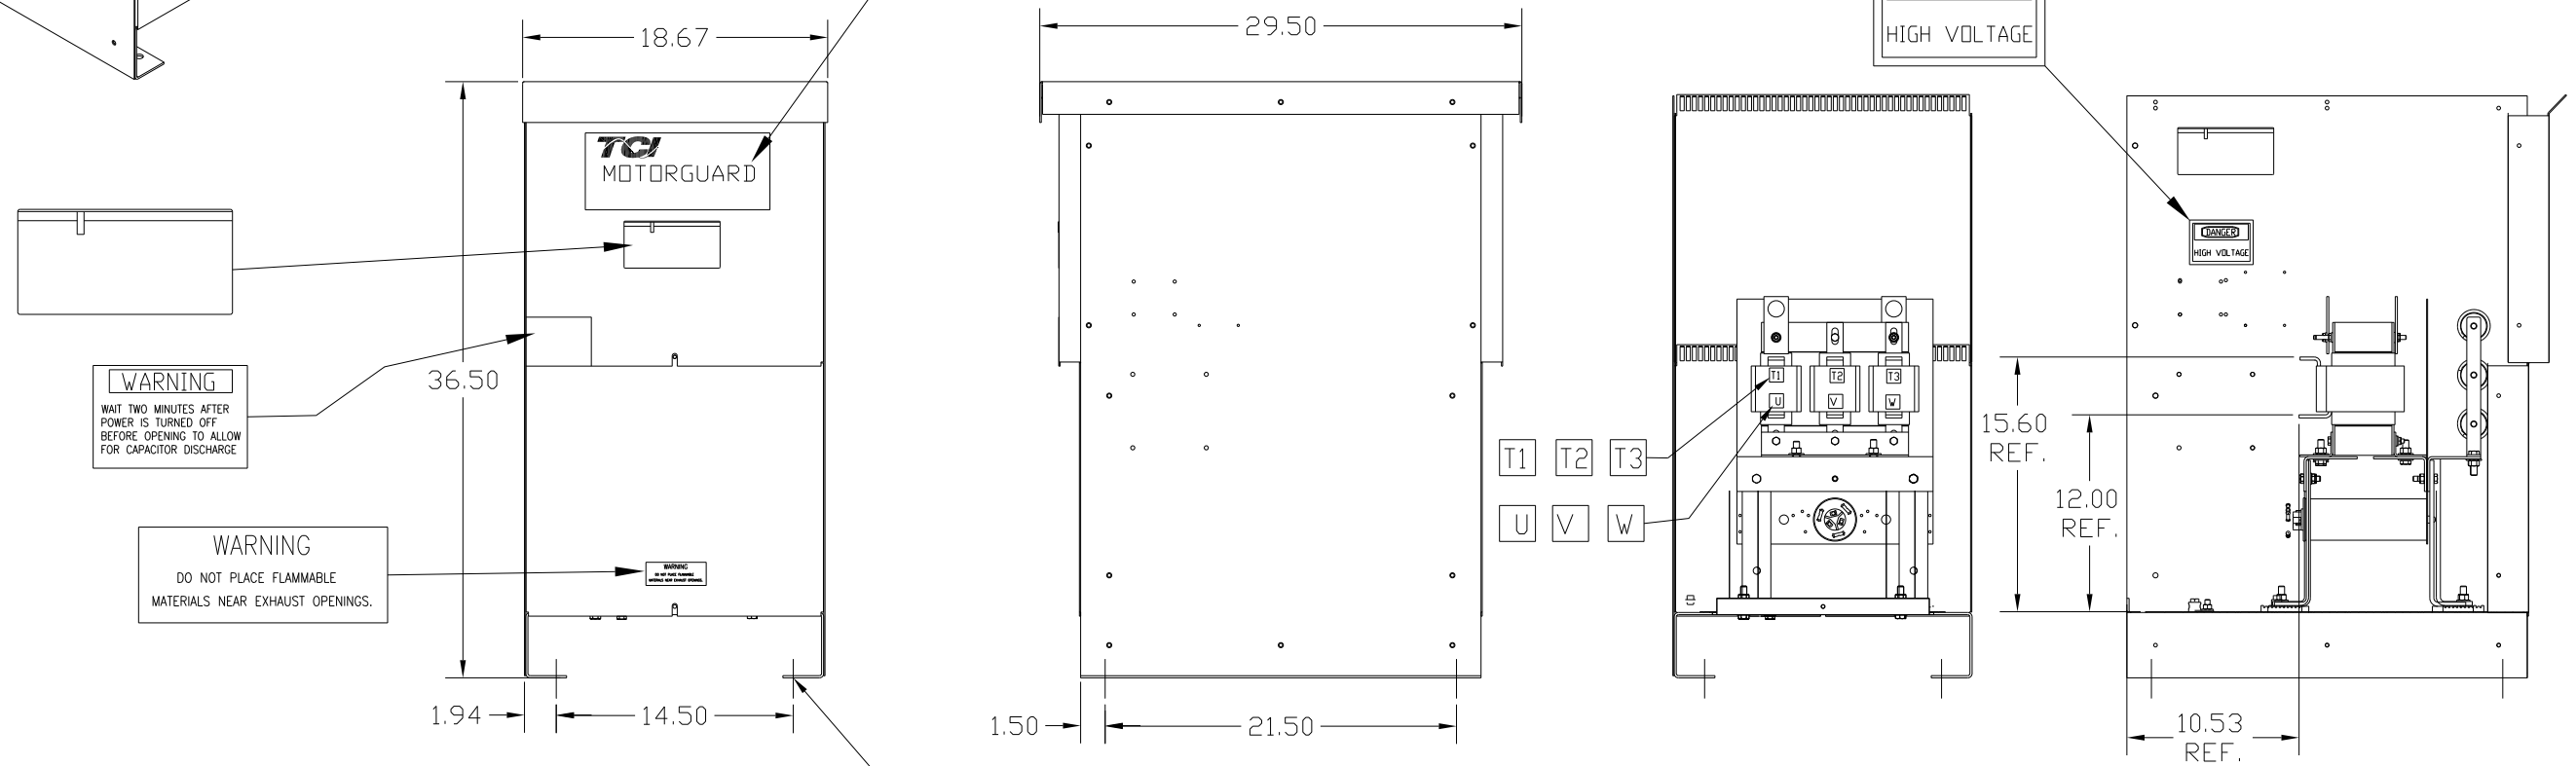

**WARNING**  
WAIT TWO MINUTES AFTER  
POWER IS TURNED OFF  
BEFORE OPENING TO ALLOW  
FOR CAPACITOR DISCHARGE

**WARNING**  
DO NOT PLACE FLAMMABLE  
MATERIALS NEAR EXHAUST OPENINGS.

.56 DIA HOLES  
4 PLACES.

CUSTOMER IS RESPONSIBLE FOR INSTALLATION  
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

				TOLERANCES (EXCEPT AS NOTED)		<b>TCI</b> 7878 N. 86th STREET MILWAUKEE, WI 53224	
				DECIMAL			
				.XX ±.03		KMG, LRC FILTER STANDARD 65 AMP 600/3/80, 1/3R	
				.XXX ±.01			
				FRACTIONAL		DRN. BY DSW DATE 1/23/09 DWG. NO. 103923DG	
				± 1/32		SCALE TO FIT APPRVD. C	
				ANGULAR		SHT. 1 OF 1	
NO	REVISION	DATE	BY	± 1/2°			