






SineWave Part Number	Schematic Drawing#	Approx Weight (LBS)
KMG8A01A	24281-1A	109
KMG8A01P	24281-1P	110

HorsePower (HP)	kVar	Max Amps	Voltage (V)	HZ	Phase
5	0.7	8	480	60	3

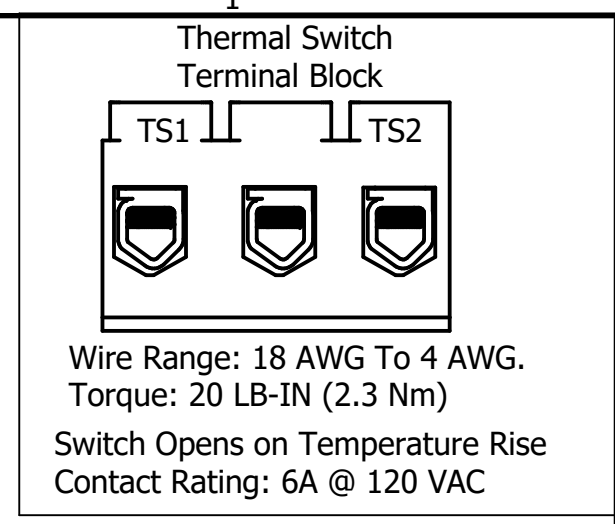


D
C
B
A

D
C
B
A

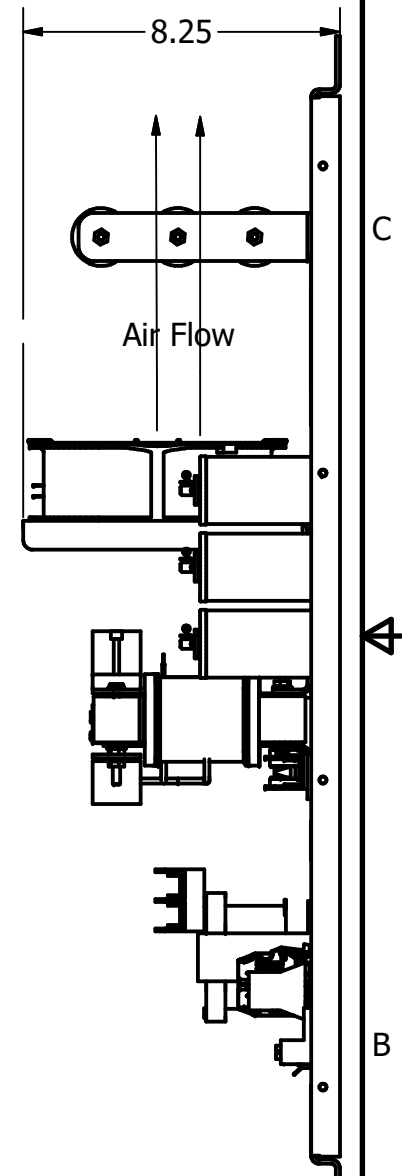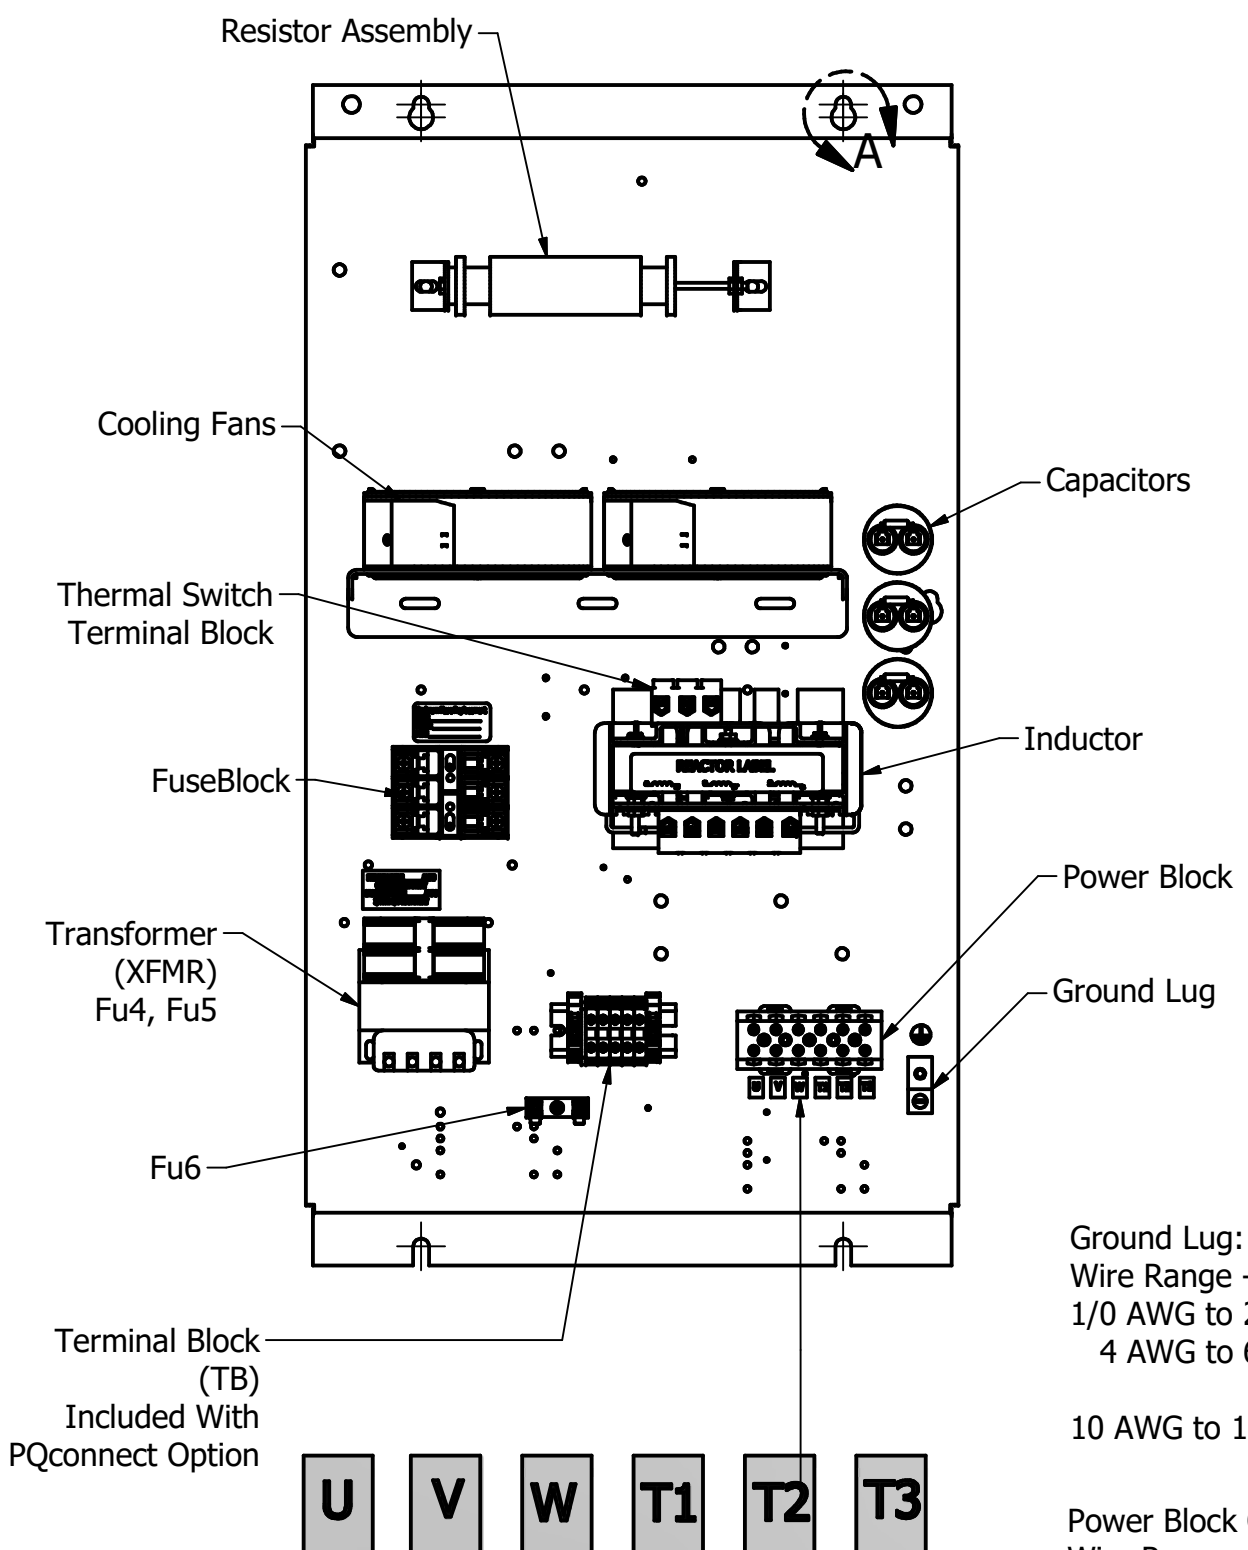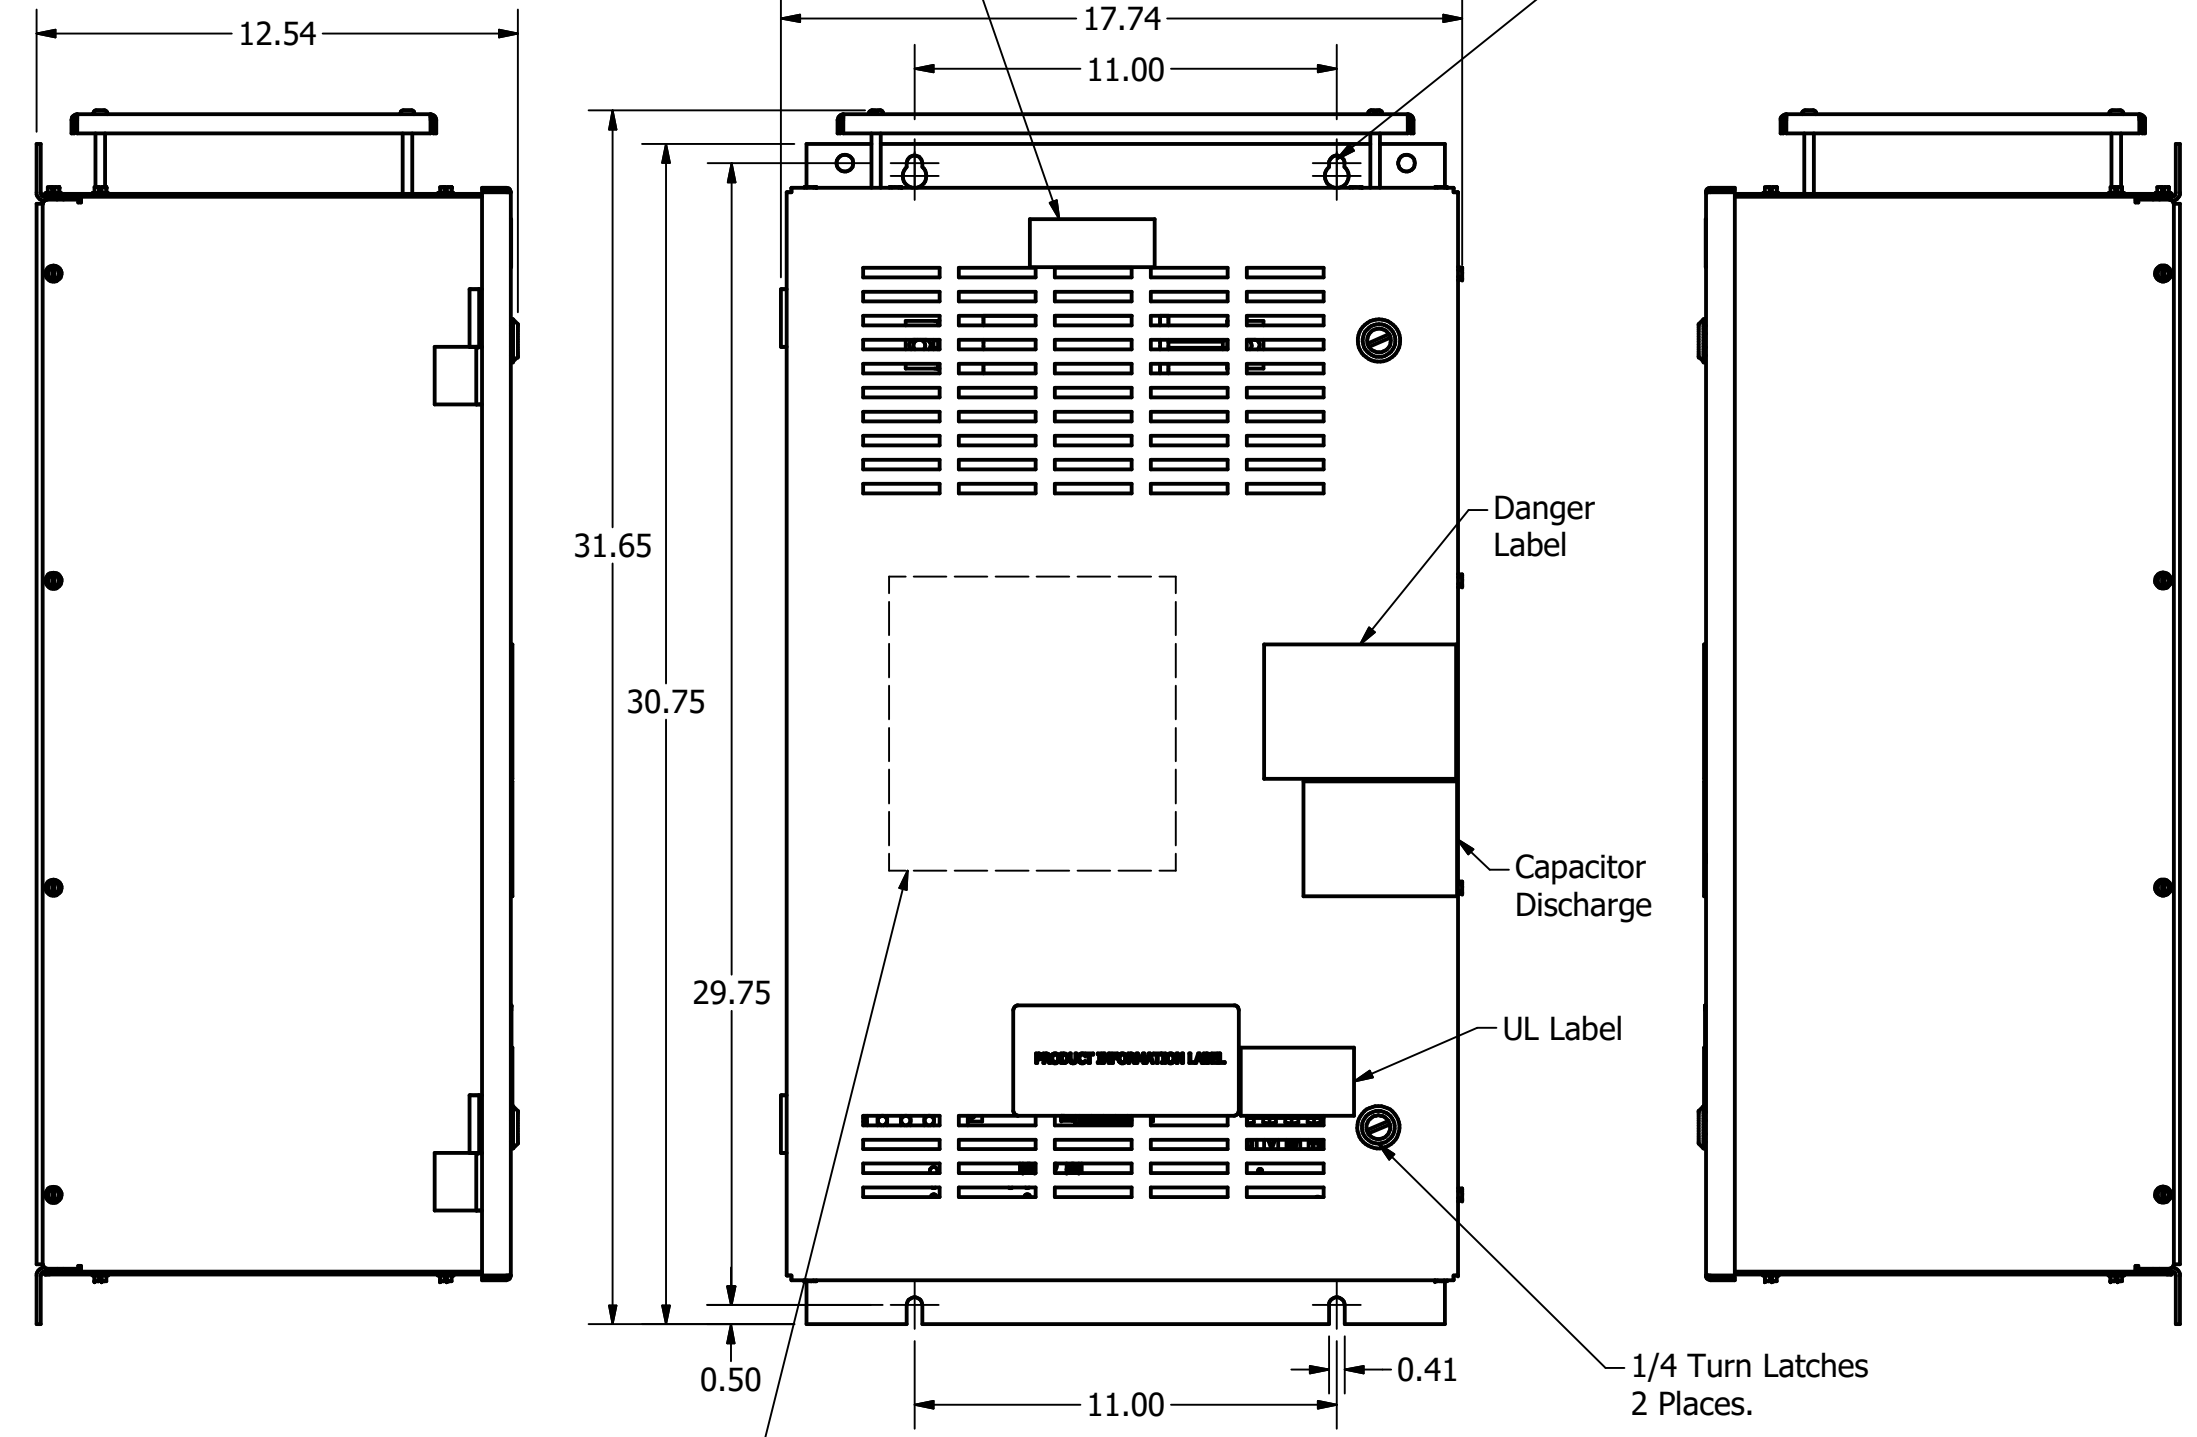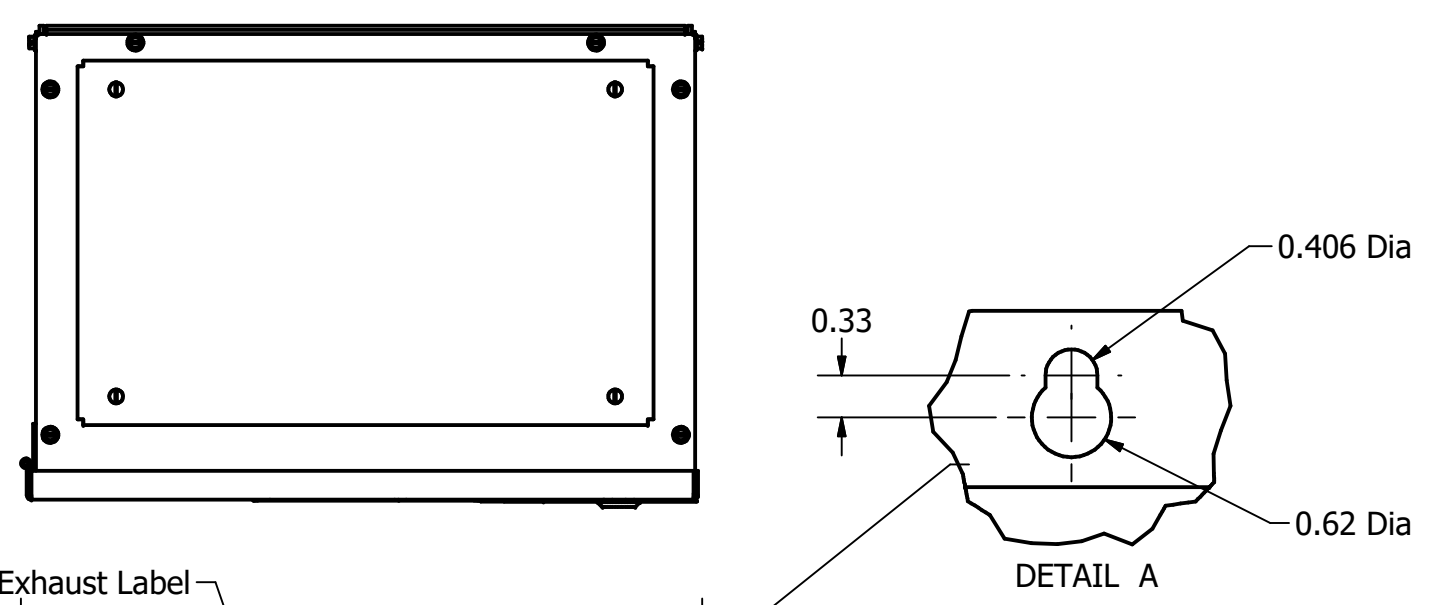

Ground Lug:
Wire Range -1/0 AWG to #14 AWG
1/0 AWG to 2 AWG: Torque 50 lbs-in
4 AWG to 6 AWG: Torque 45 lbs-in
8 AWG: Torque 40 lbs-in
10 AWG to 14 AWG: Torque 35 lbs-in

Power Block Connections
Wire Range -1 AWG to #22 AWG
1 AWG to 4 AWG: Torque 35 lbs-in
6 AWG to 14 AWG: Torque 30 lbs-in
16 AWG to 20 AWG: Torque 25 lbs-in
22 AWG: Torque 20 lbs-in

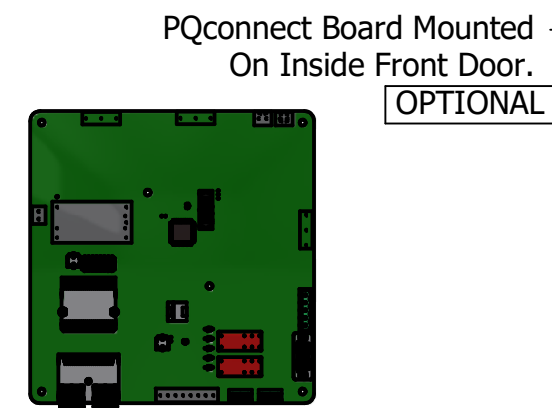

Customer Is Responsible For Installation to Meet All National And Local Electrical Codes.

Material(s) Shall be RoHS Compliant

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.				TOLERANCES (EXCEPT AS NOTED)	W132N10611 Grant Drive Germantown, WI 53022 © 2021 TCI, LLC KMG8A01-, SineWave Filter Enclosed Type 1, 5HP, 480V 104348DG
				DECIMAL	
				.XX ± .25 .XXX ± .10	
				FRACTIONAL ± 1/16	
	D 6712 Added TB	07/03/24	JRN	ANGULAR ± 1°	DRN BY DSW DATE 10/07/2010
	C Add PQconnect Board	6/17/2020	DSW		SCALE 1/8 APRVD: SIZE C
	NO REVISION	DATE	BY		SHT 1 OF 1

4 3 2 1