
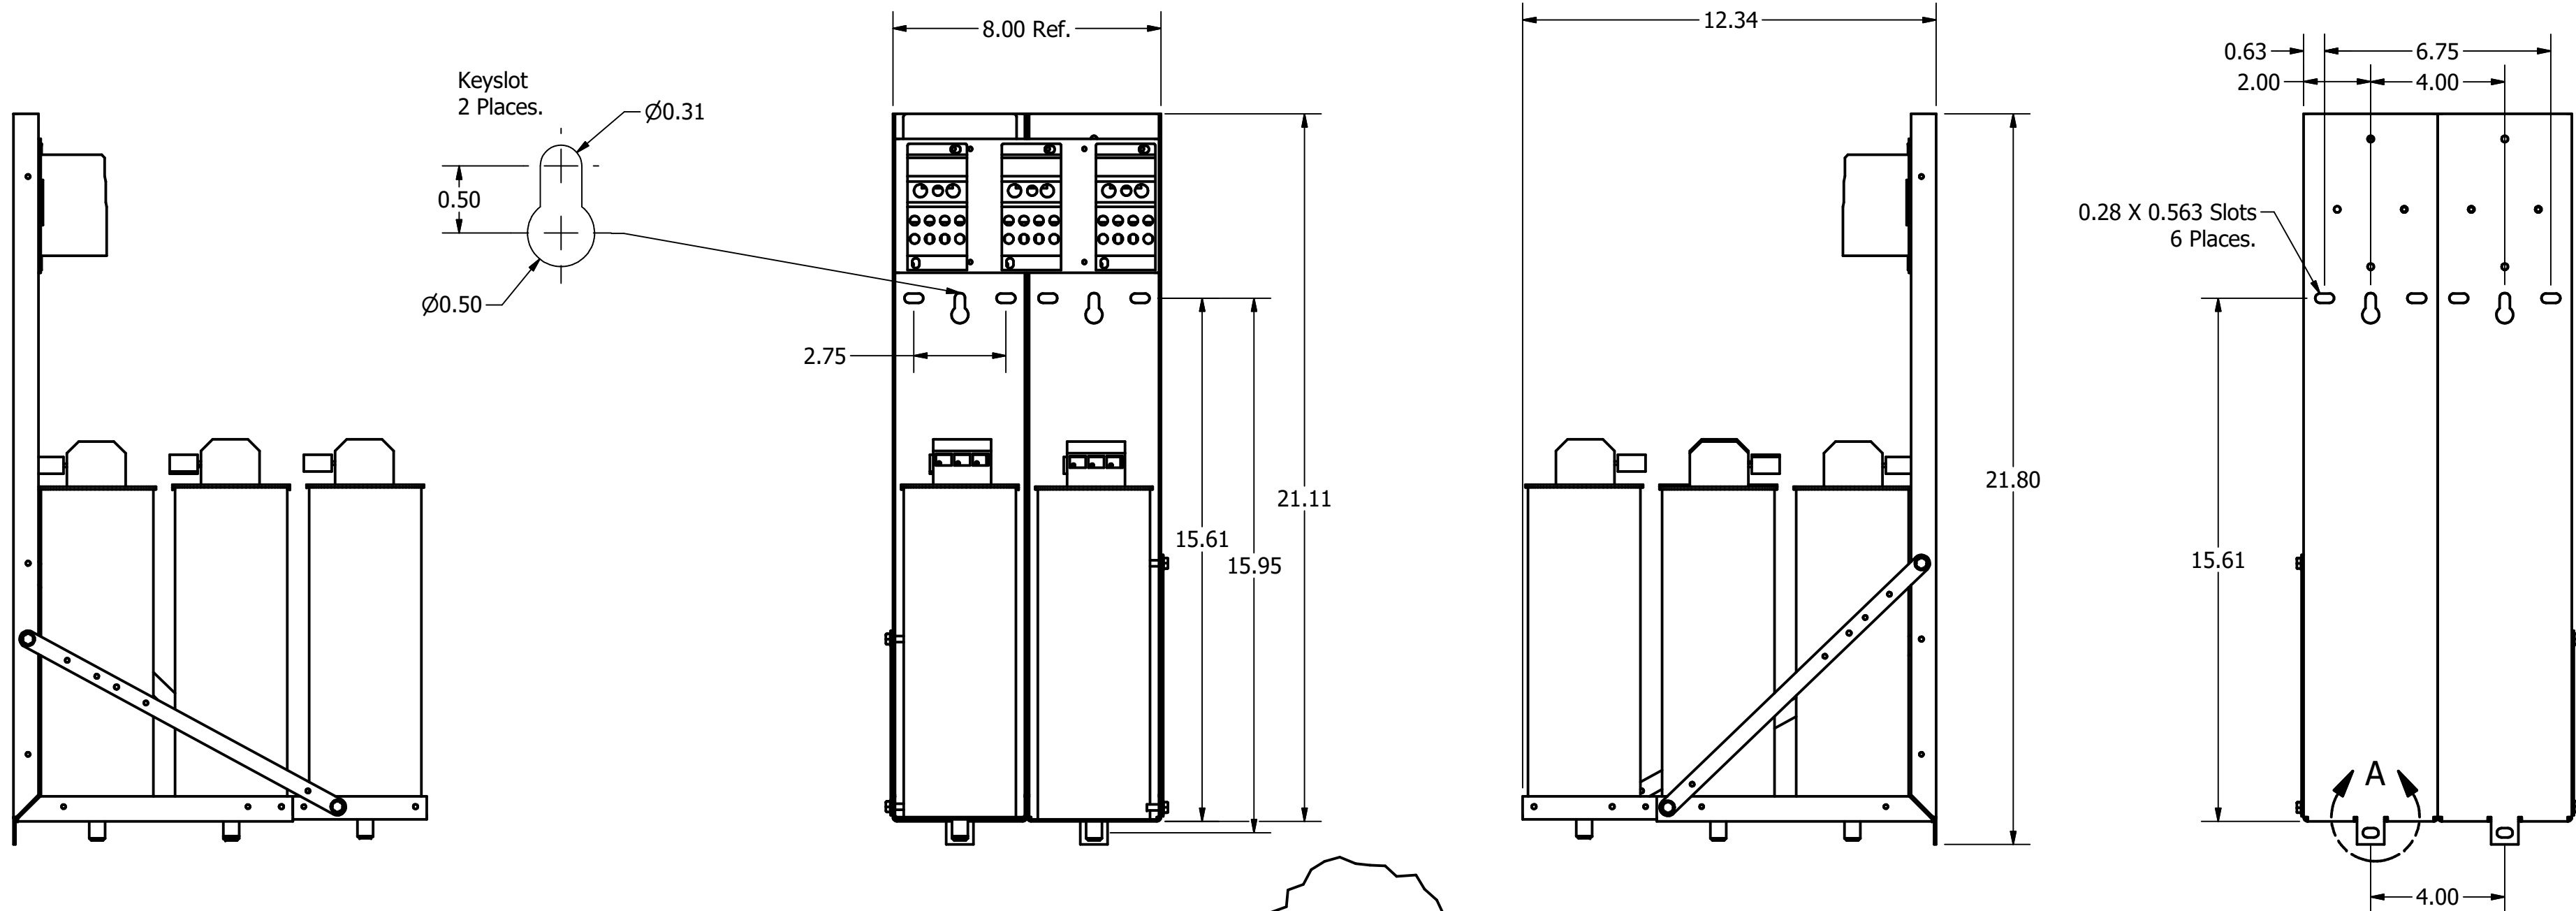
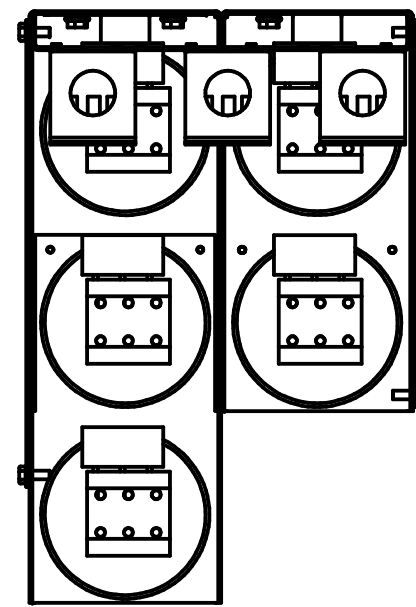



KPCUL048A65, 480V, 107A, 48kVar
 Approx. Weight: 33 Lbs

Customer Input	
Wire Range	Tightening Torque
3/0-350mcm	230 Lb-In


Cap Connection	
Wire Range	Tightening Torque
(2x)14-2 Awg.	31 Lb-In
(5x)14-8 Awg.	18 Lb-In
(4x)14-6 Awg.	18 Lb-In

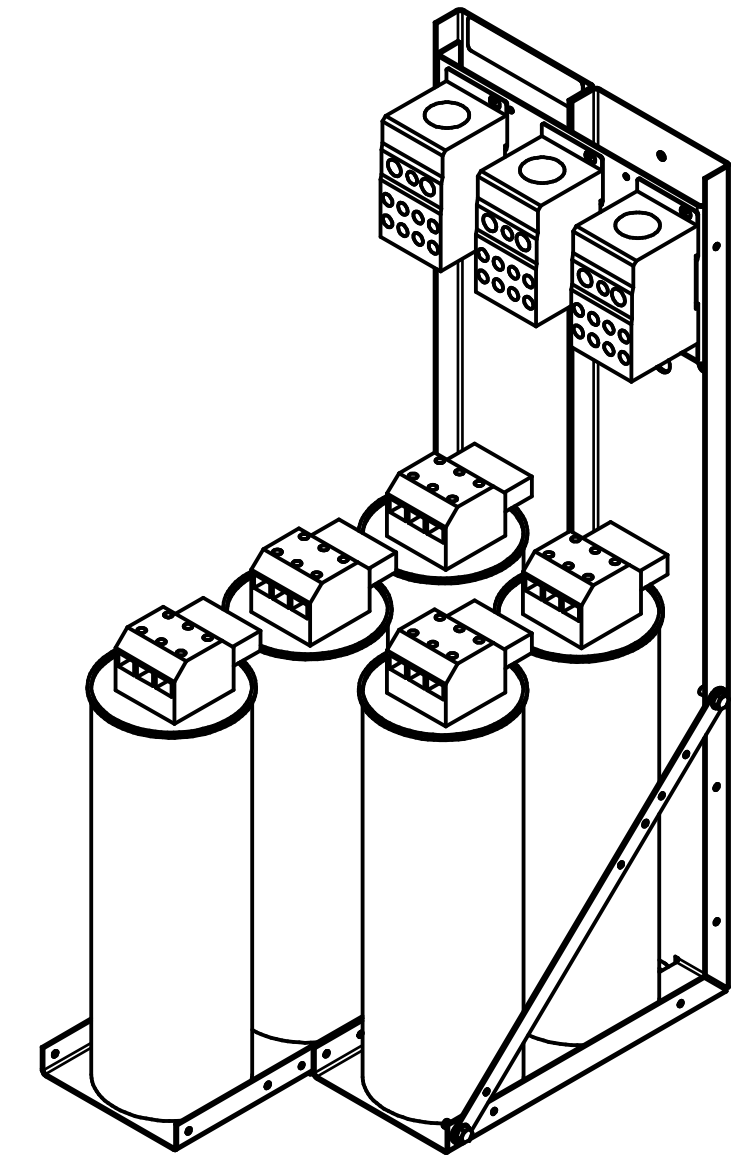

Note: 27908, Manual KPC Installation Guide
 MUST SHIP WITH EACH ASSEMBLY.

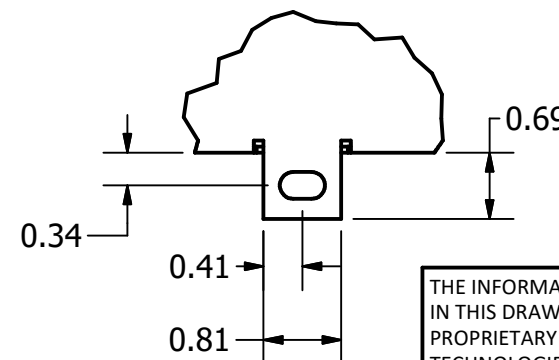

DETAIL A

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.				TOLERANCES (EXCEPT AS NOTED)		 W132N10611 Grant Drive Germantown, WI 53022 © 2021 TCI, LLC
				DECIMAL		
B Corrected Tightening Torque		07/08/21	JRN	FRACTIONAL	DRN BY JRN DATE 07/06/21 SCALE To Fit APRVD: 108989DG SIZE C SHT.1 OF 1	
A As Designed		07/06/21	JRN	ANGULAR		
NO REVISION		DATE	BY	ANGULAR	± 1°	