
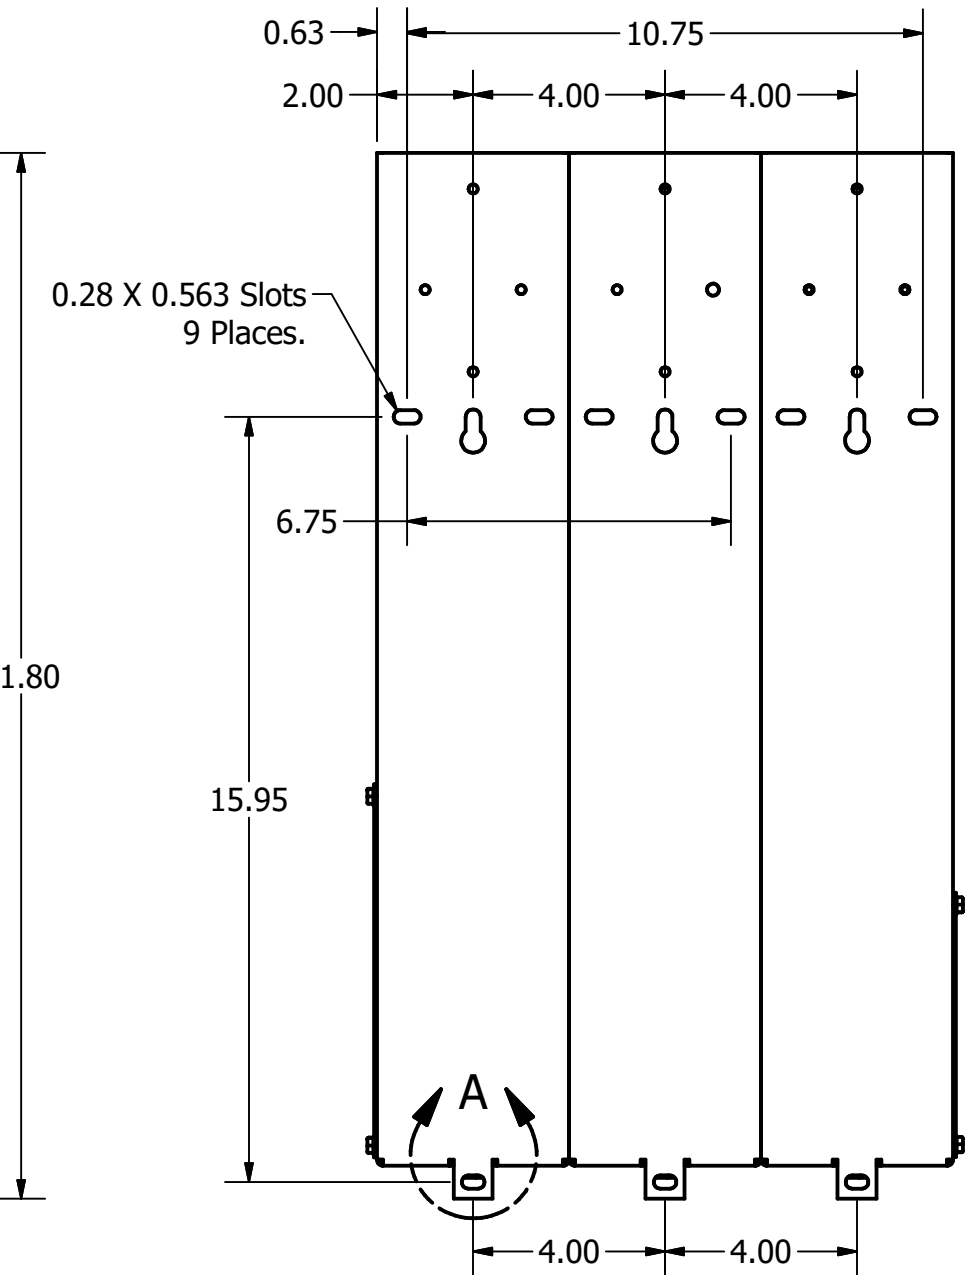
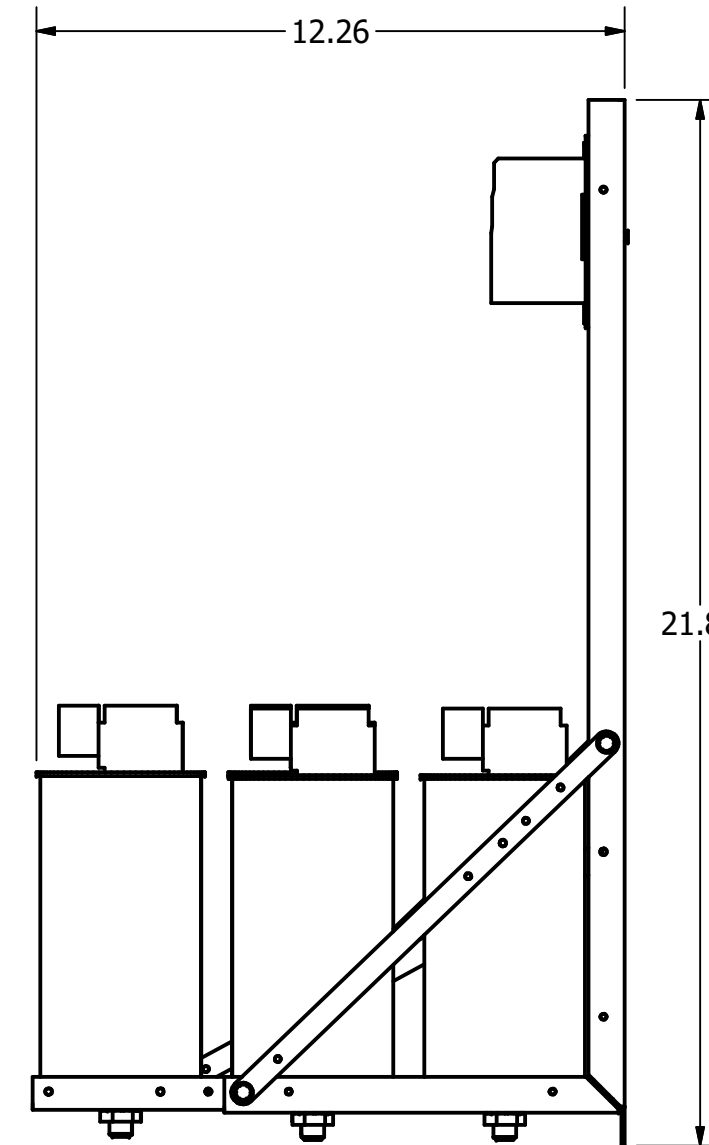
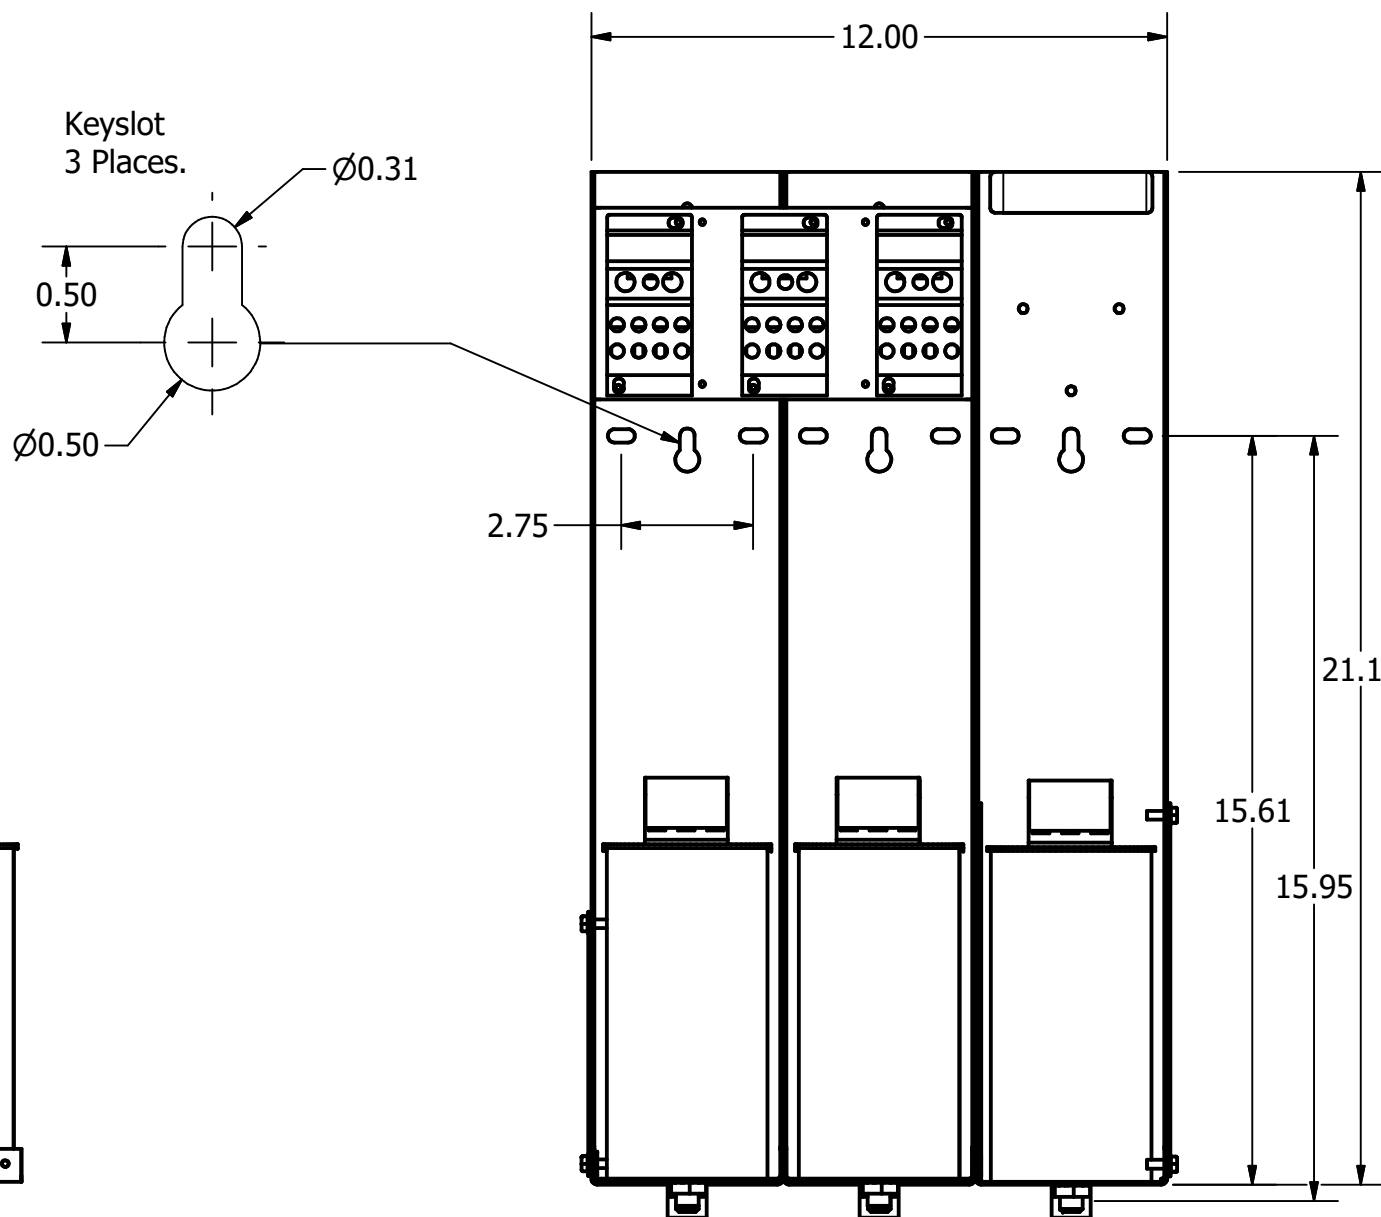
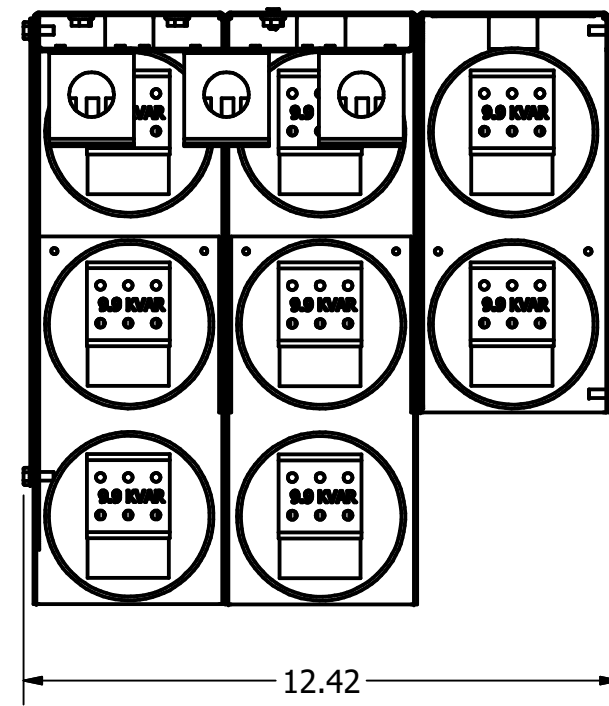



KPCUL080A64, 480V, 80kVar,
Approx. Weight: 45 Lbs

Customer Input	
Wire Range	Tightening Torque
3/0-350mcm.	230 Lb-In

Cap Connection	
Wire Range	Tightening Torque
(2x)14-2 Awg.	31 Lb-In
(5x)14-6 Awg.	17.5 Lb-In
(4x)14-8 Awg.	17.5 Lb-In

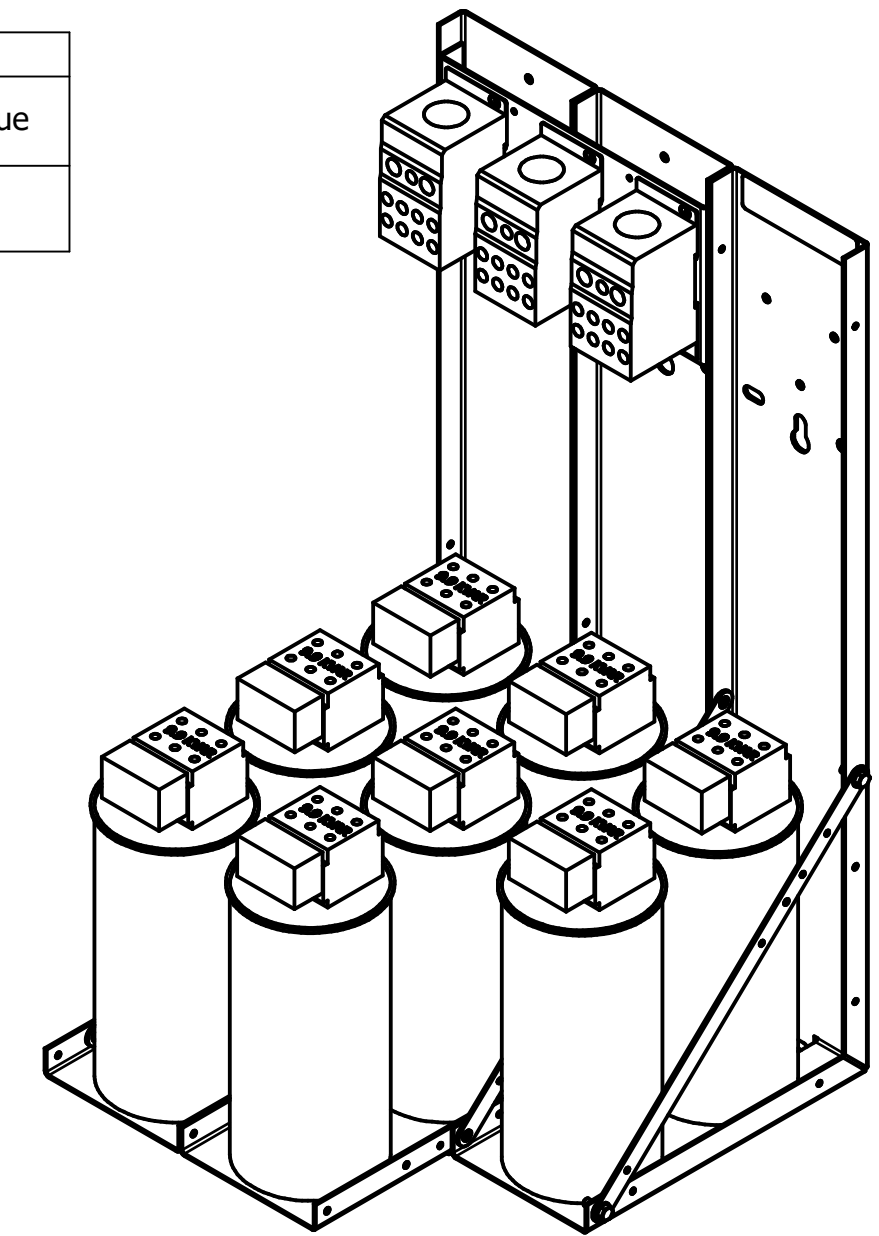


Note: 27908, Manual KPC Installation Guide
MUST SHIP WITH EACH ASSEMBLY.

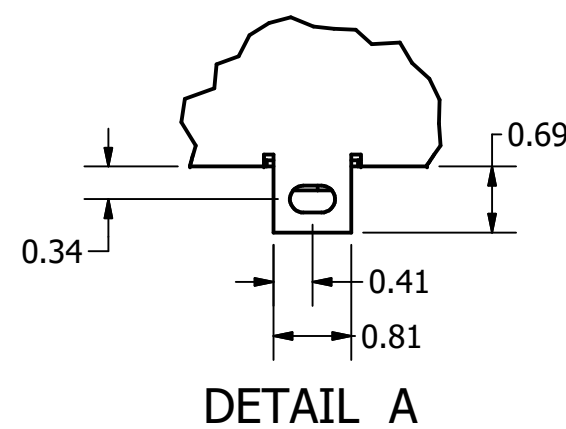

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.

NO	REVISION	DATE	BY
A	As Designed	02/25/21	JRN

TOLERANCES (EXCEPT AS NOTED)		 An Allied Motion Company	W132N10611 Grant Drive Germantown, WI 53022 © 2021 TCI, LLC
DECIMAL			
.XX ± .25		KPCUL080C64, 80 kVar Panelized Caps, SW	DRN BY: JRN DATE: 02/25/21 SCALE: To Fit
.XXX ± .10			
FRACTIONAL		108845DG	SIZE: C SHT. 1 OF 1
± 1/16			
ANGULAR			
± 1°			