
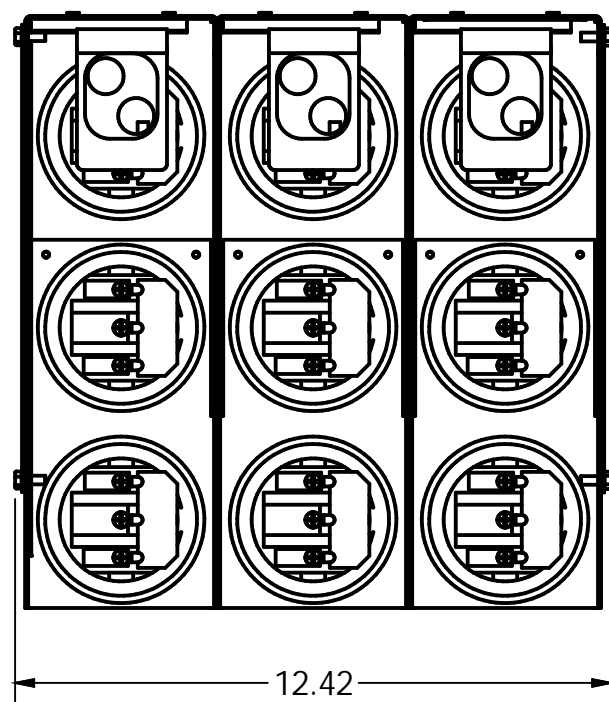


KPCUL090A63, 480V, 90kVar, 600 HP  
 Approx. Weight: 45 Lbs






Customer Input	
Wire Range	Tightening Torque
300kcmil - 4 Awg	275 Lb-In

Cap Connection	
Wire Range	Tightening Torque
4-6 Awg.	35 Lb-In
8 Awg.	25 Lb-In
10-14 Awg.	20 Lb-In

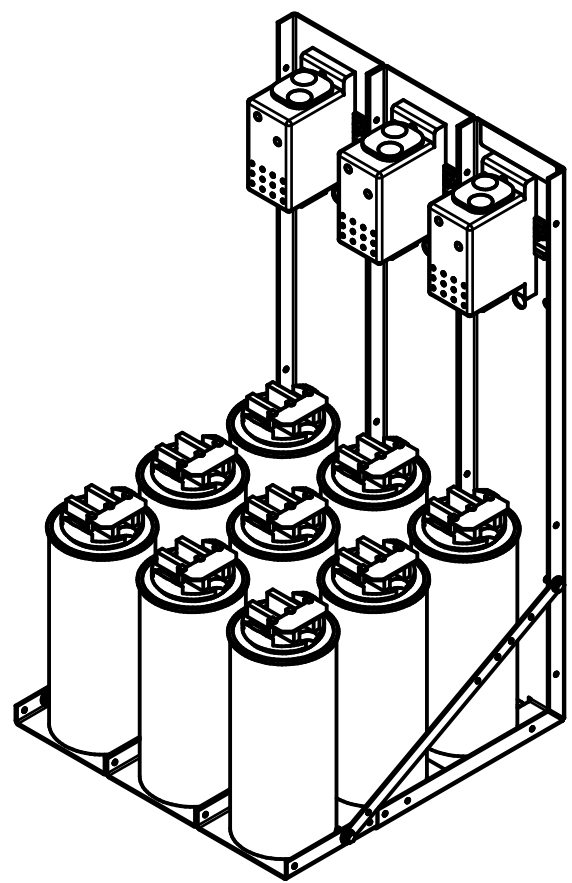


D  
C  
B  
A

D  
C  
B  
A

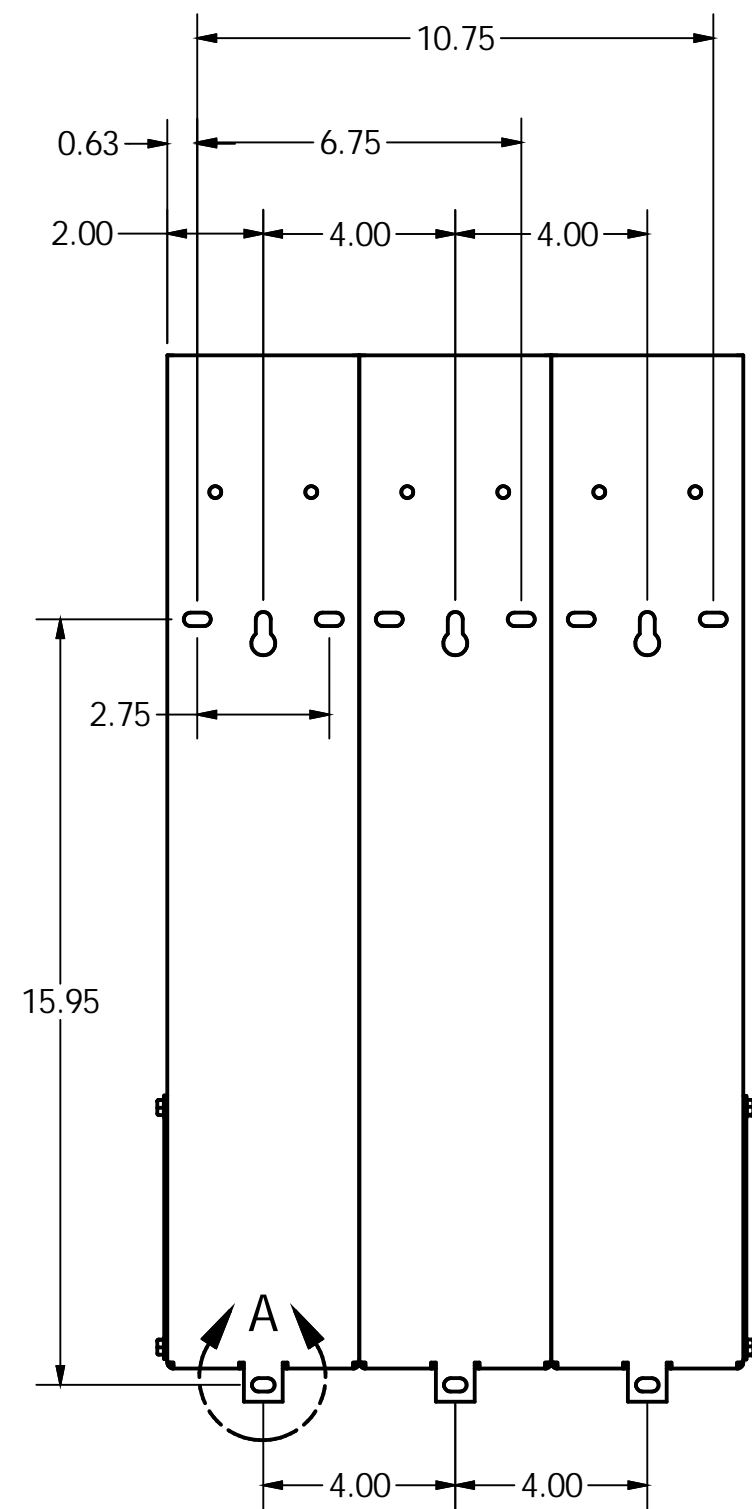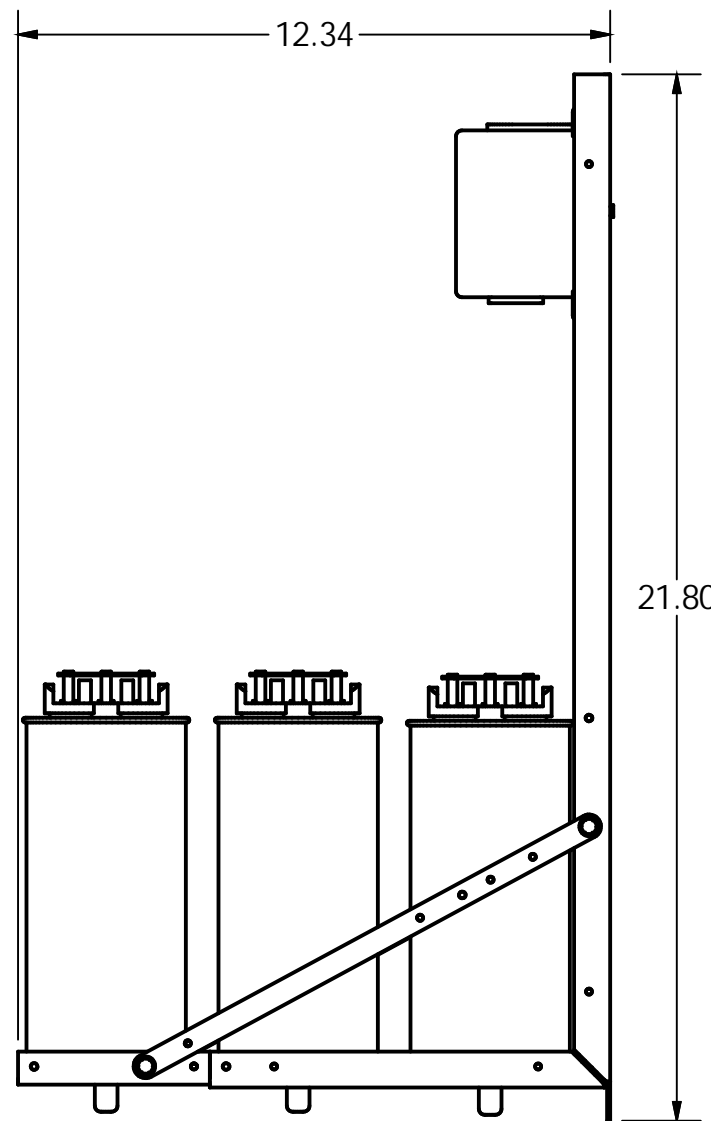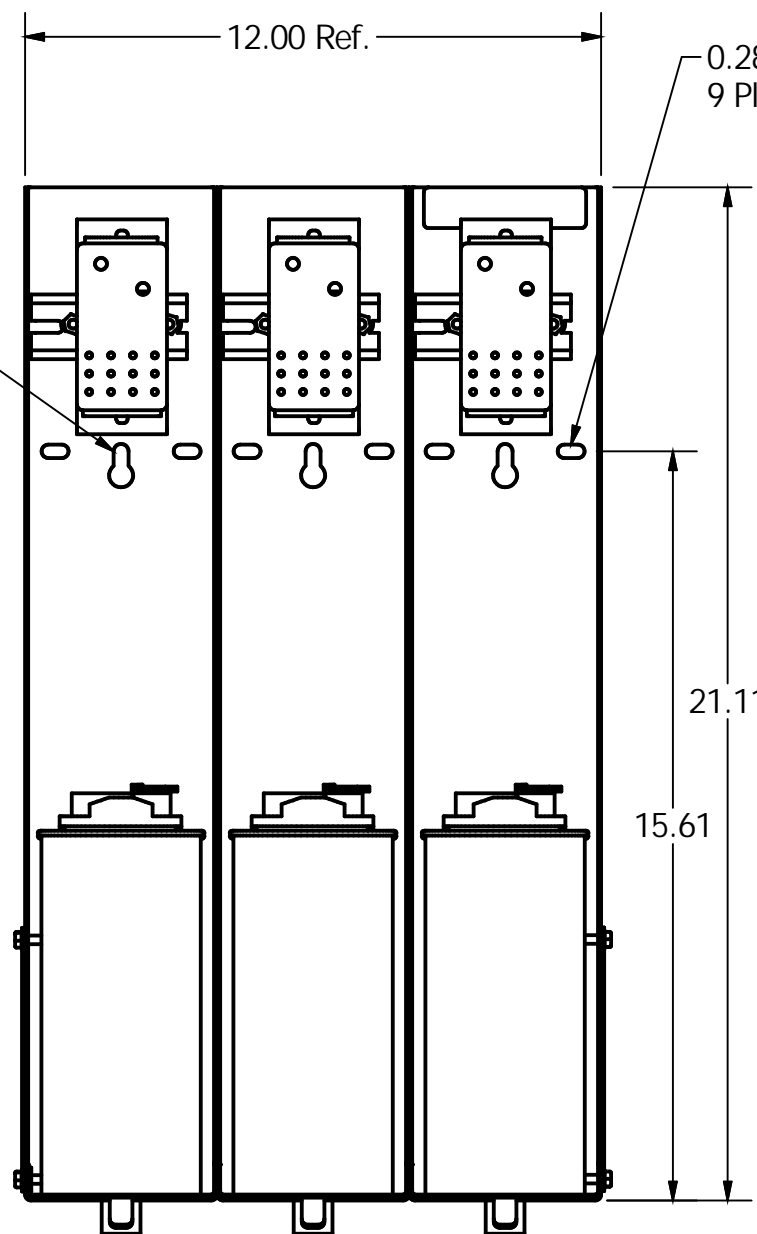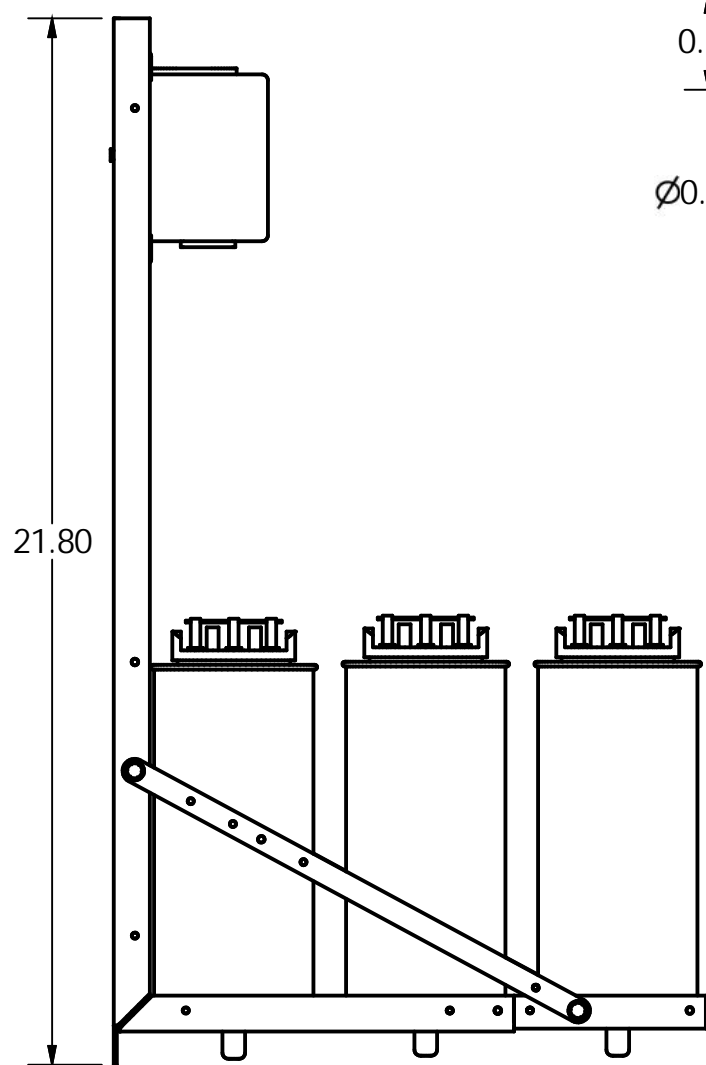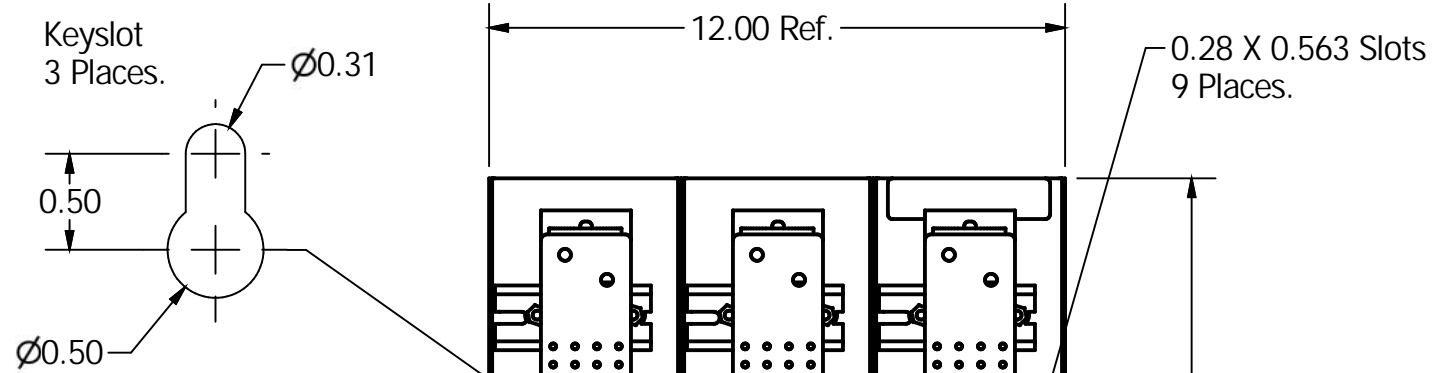

Note: 27908, Manual KPC Installation Guide  
 MUST SHIP WITH EACH ASSEMBLY.

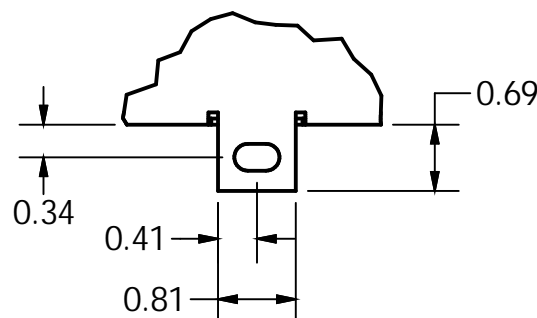

DETAIL A

HOLE TOLERANCE ± .005

TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THERE IN WITHOUT WRITTEN PERMISSION FROM TCI.				TOLERANCES (EXCEPT AS NOTED) DECIMAL .XX ± .03 .XXX ± .010	W132 N10611 Grant Drive Germantown, WI 53022		
				FRACTIONAL ± 1/32		KPCUL090A63, 90 kVar., 600 HP Panelized Caps, Low C	
	A	As Designed	10/17/17	JRN	DRN BY: JRN SCALE: To Fit		DATE: 10/17/17 APRVD:
	NO	REVISION	DATE	BY	ANGULAR ± 1°	SHT. 1 OF 1	

4

3

2

1