
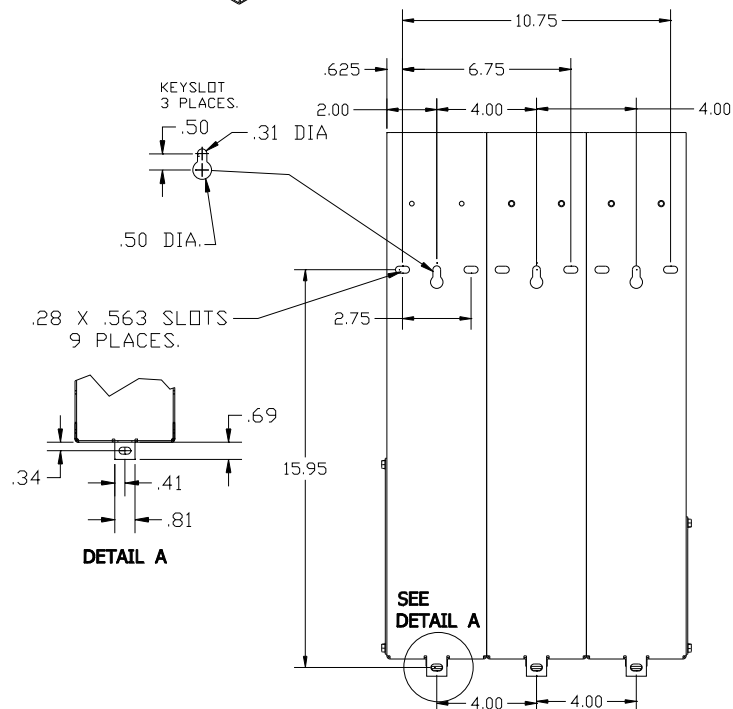
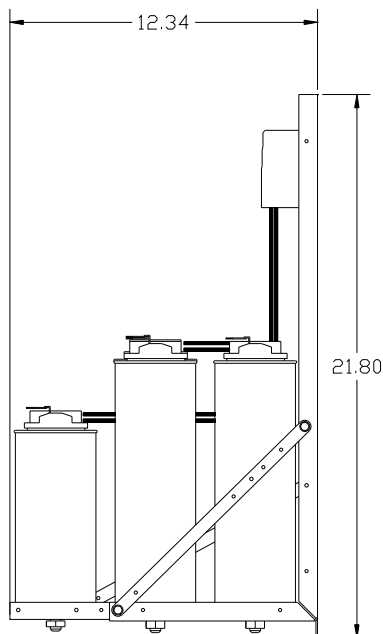
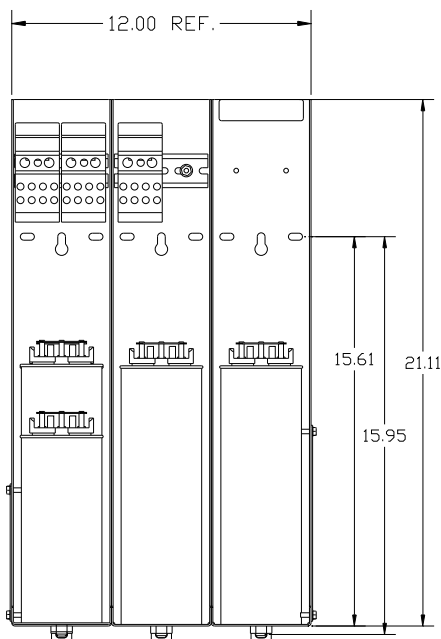
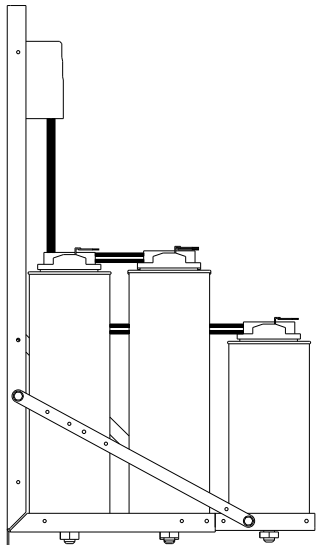
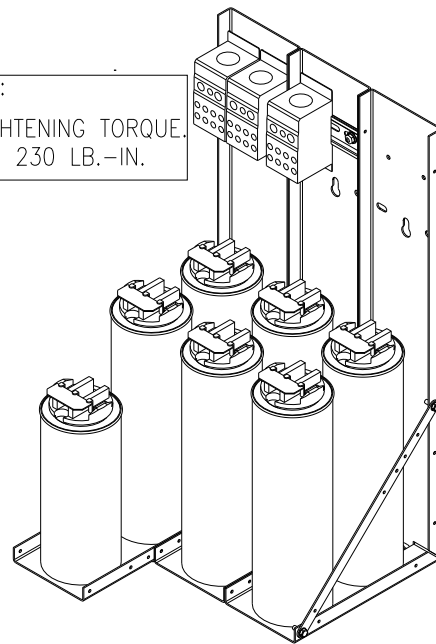


KPCUL135A60, 480V, 135kVar, 450HP.

APPROX. WEIGHT: 40LBS

CUSTOMER INPUT:

WIRE RANGE TIGHTENING TORQUE.
3/0-350mcm. 230 LB.-IN.

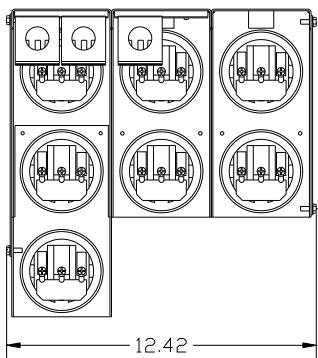

NOTE: 27908, Manual KPC Installation Guide
MUST SHIP WITH EACH ASSEMBLY.

<p>TCL, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREJUDICE TO ANY PATENT RIGHTS OF TCL AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCL.</p>				TOLERANCES (EXCEPT AS NOTED): DECIMAL	<p>TCL® W132 N10611 Grant Drive Germantown, WI 53022</p> <p>KPCUL135A60, 450HP, 135kVar PANELIZED CAPS</p> <p>DRN BY: DSW DATE: 8/23/11 DWG. NO: 104800DG SCALE: TO FIT SIZE: C SH1.1 OF 1</p>
				.XX ± .03	
				.XXX ± .01	
				FRACTIONAL ± 1/32 ANGULAR ± 1/2°	
D	3093 CAP CHG	5/8/14	BMZ		
NO	REVISION	DATE	BY		