

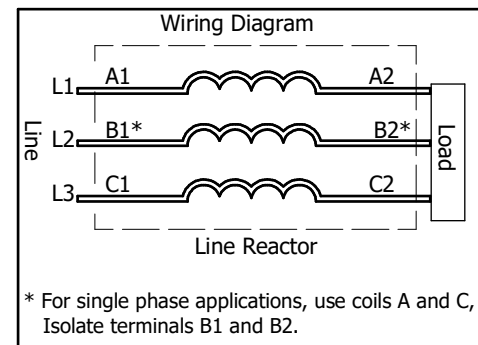
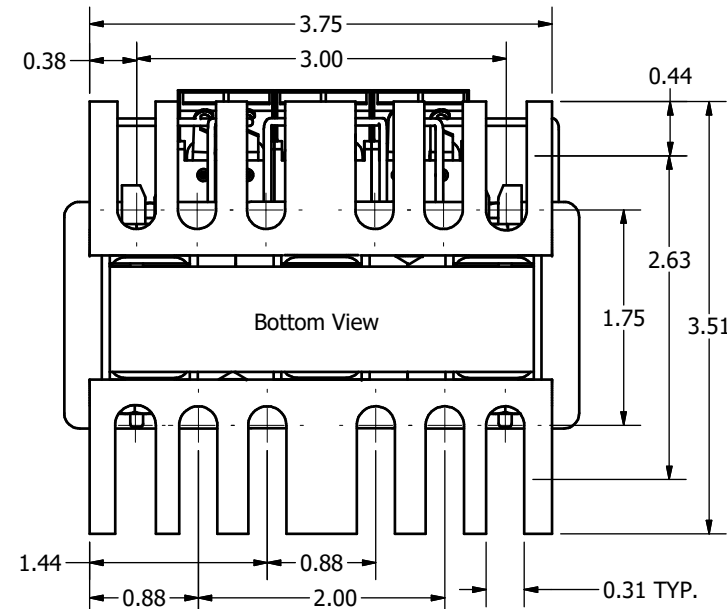
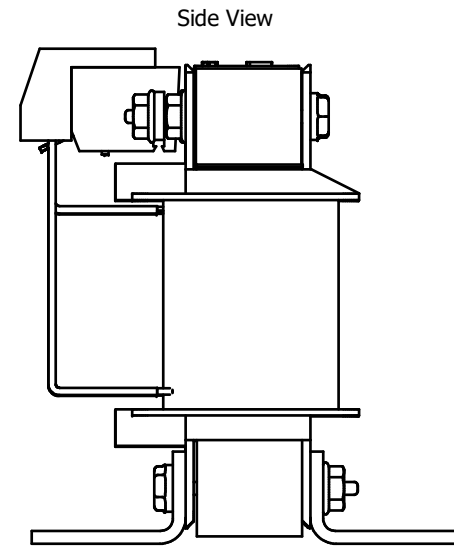


(Customer Connections) Markings On Terminal Block For Reference Only.
 Wire Range: 18-12 AWG.
 Torque : 10 IN-LBS (1.1 Nm)

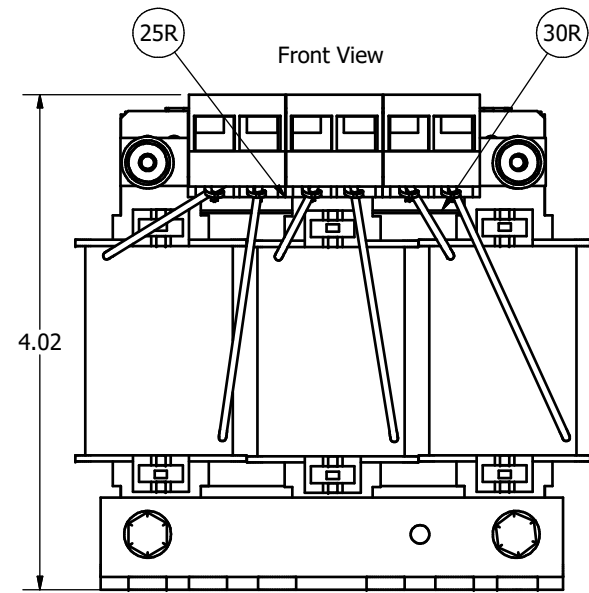

Part Number	Amps (A)	Volts (V)	--mH +8%/-2%	Weight (LBS)	Item #	Measured Gap
KTR012A65HGN	2.5	37.5	23	3.4	13	0.040

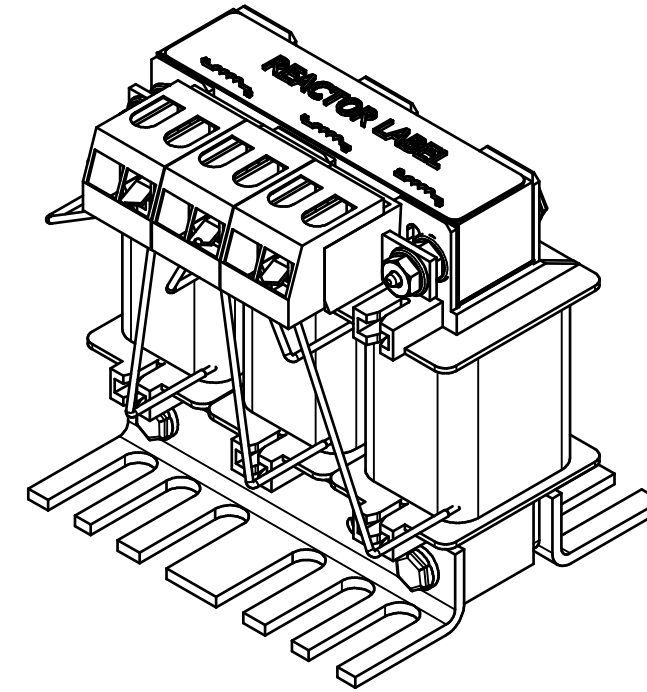

TCL, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREJUDICE TO ANY PATENT RIGHTS OF TCL AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCL.

TOLERANCES (EXCEPT AS NOTED)		DATE		BY	
DECIMAL	.XX ± .25 .XXX ± .10	8/8/16	DSW	8/8/16	DSW
FRACTIONAL	± 1/16				
ANGULAR	± 1°				
NO	REVISION	DATE	BY		

TCL W132 N10611 Grant Drive
 Germantown, WI 53022

KTR, 480V, 2.5A, 3 Phase, Open
 5th Tuning Inductor

DRN BY: DSW DATE: 1/21/13 105197DG
 SCALE: 1:1 APRVD: SIZE C SHT.1 OF 1