



**Wire Range:**  
1AWG (7 & 19 strand only), 2 AWG to 22AWG

**Tightening Torque:**  
1AWG thru 4AWG 35 in.-lb. max  
6AWG thru 14AWG 30 in.-lb. max  
16AWG thru 22AWG 25 in.-lb. max

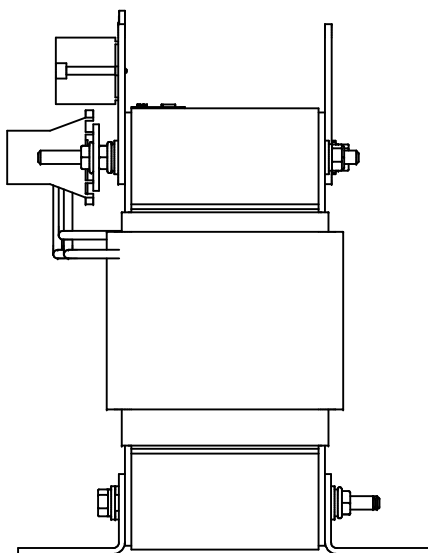

TCI Part Number	Horsepower (HP)	Rated Amps (A)	---uH +8%/-2%	Weight (LBS)
KTR8A65HE	60	22	4075	65

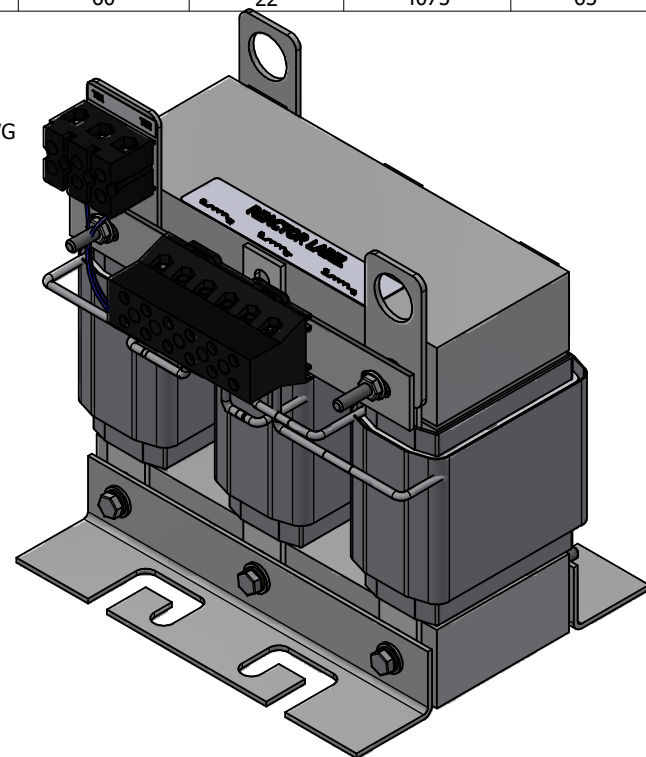

Thermal Switch  
Terminal Block  
TS1 TS2

Wire Range: 18 AWG To 4 AWG.  
Torque: 20 LB-IN (2.3 Nm)  
Switch Opens on Temperature Rise  
Contact Rating: 6A @ 120 VAC

Customer Is Responsible For Installation to  
Meet All National And Local Electrical Codes.

Material(s) Shall be RoHS Compliant

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.				TOLERANCES (EXCEPT AS NOTED)		W132N10611 (Rev 13 Feb 2022) Germantown, WI 53022 © 2022 TCI, LLC	An Official Motion Company KTR8A65HE, HSE, Tuning Inductor 60HP, 480V, 22 Amps, 4075uH	DWN BY: DSW SCALE: 1/2	DATE: 7/15/2022 DRWV: C5	108927DG SHT 1 OF 1
				DECIMAL	ANGULAR					
A	As Designed	7/15/2022	DSW	.XX ± .25	± 1/16	NO	REVISION	DATE	BY	HSE
	NO			.XXX ± .10	± 1°					