
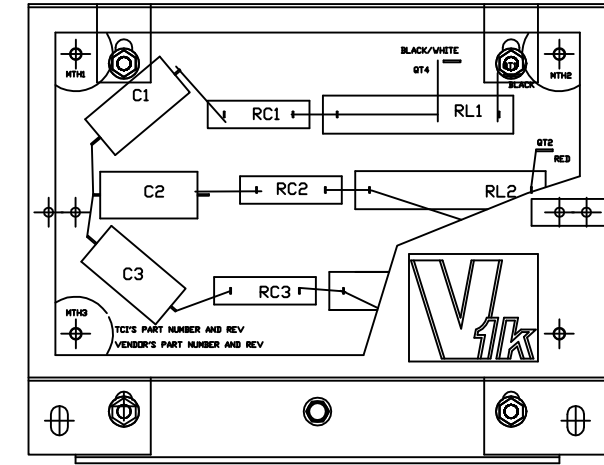
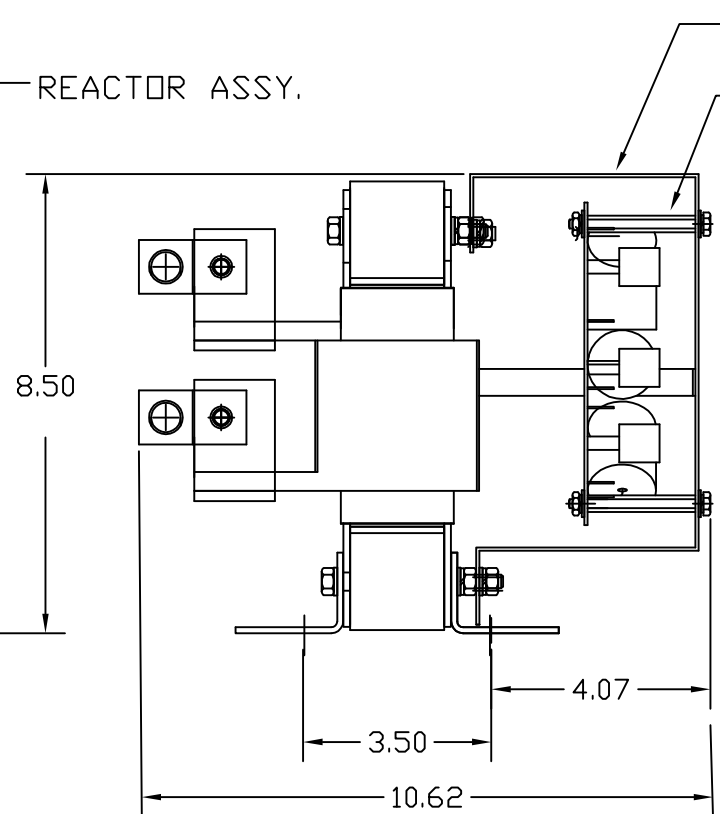
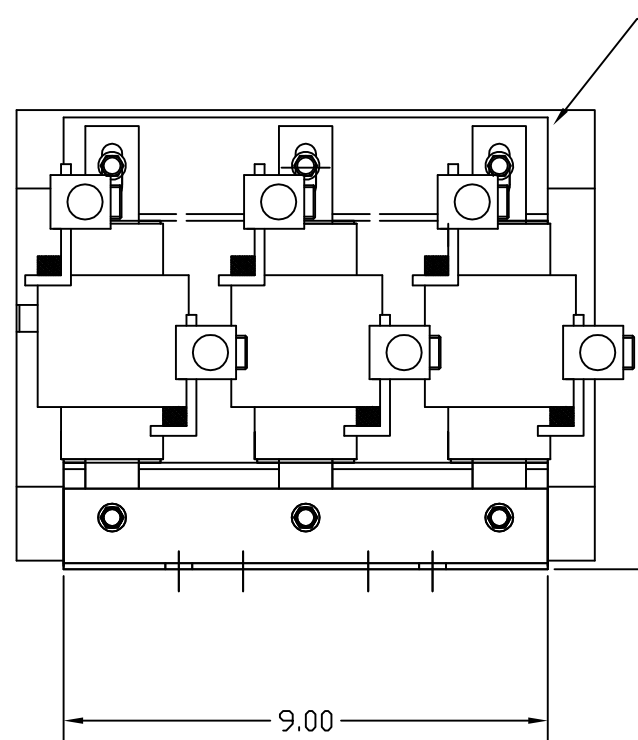
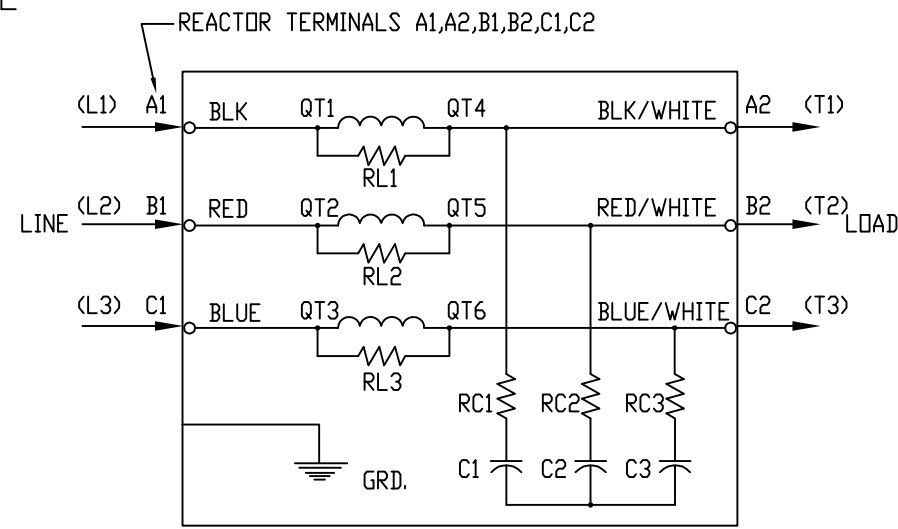
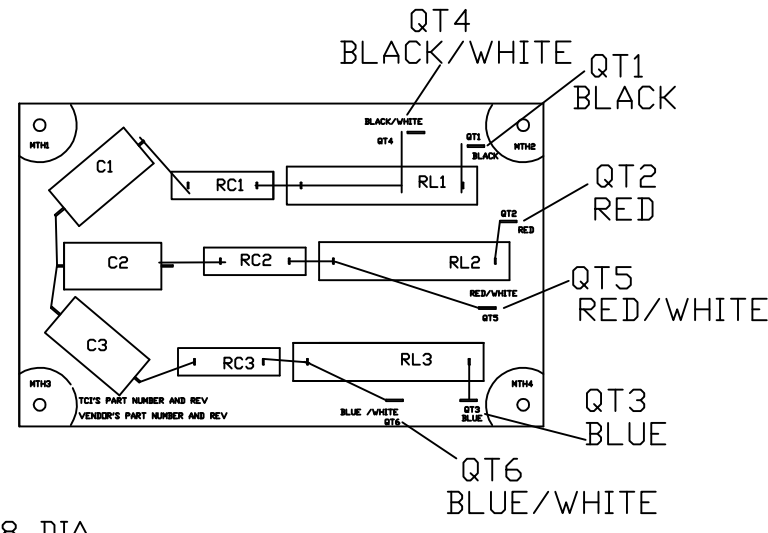
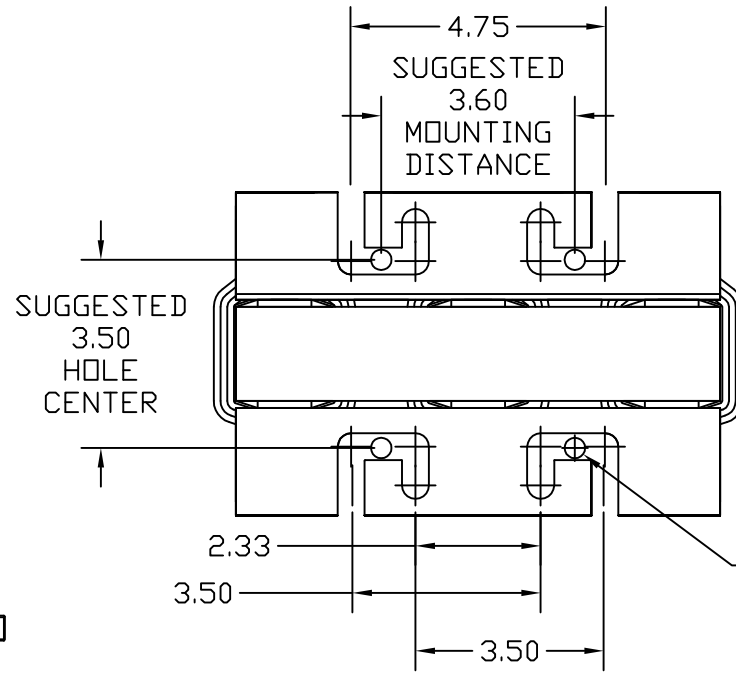


"SEE V1K INSTALLATION GUIDE FOR TERMINAL WIRE SIZE AND TORQUE"

SPECIFICATIONS:	
AMP.	160
VOLT	240-600
PHASE	3
HZ	60
WEIGHT, LBS.	60
OPEN VERSION	

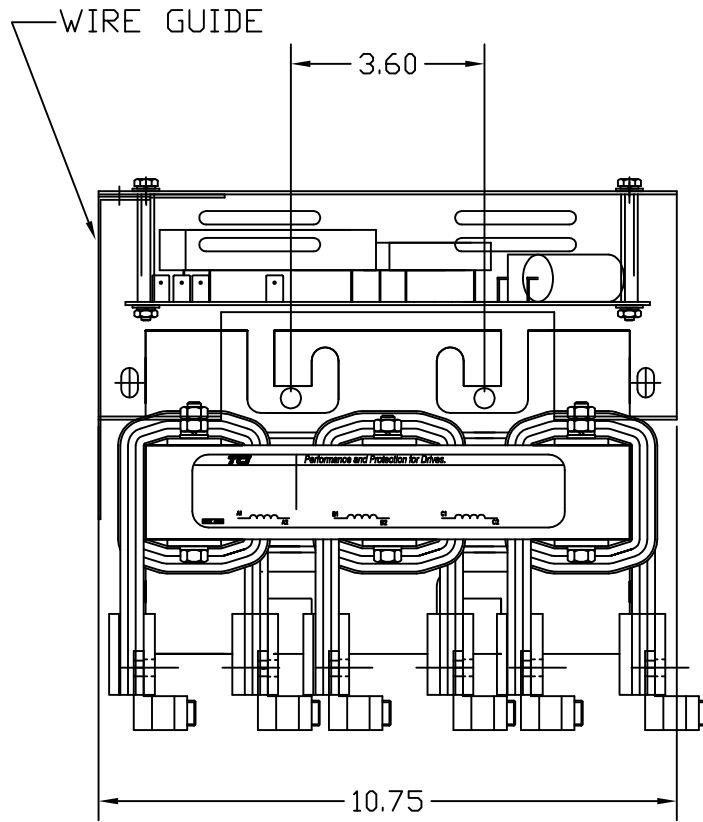

REACTOR AND BOARD ASSEMBLY CONNECTIONS

REAR VIEW

TOLERANCE UNLESS OTHERWISE NOTED:	
MOUNTING	+/- .06
OVERALL	+/- .12

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCI.

3216	ADD SEE GUIDE	10/31/14	DSW	
NO	REVISION	DATE	BY	

TOLERANCES (EXCEPT AS NOTED)
DECIMAL
.XX ± .03
.XXX ± .01
FRACTIONAL
± 1/32
ANGULAR
± 1/2°

TCI W132 N10611 GRANT DRIVE GERMANTOWN, WI 53022

V1K160A00EX, OUTPUT FILTER
160 AMP, OPEN VERSION
EXTENDED LENGTH APPLICATIONS

DRN. BY	RJC	DATE	5/20/05	DWG. NO.	102712
SCALE	NONE	SIZE	B	SHT. 1 OF 1	