
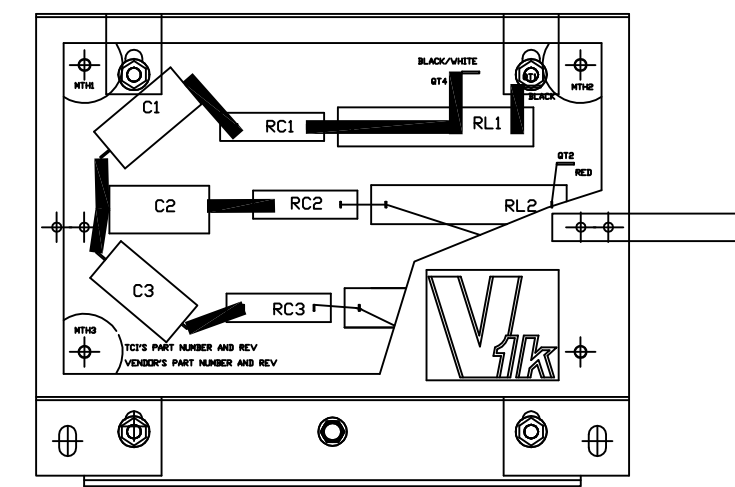
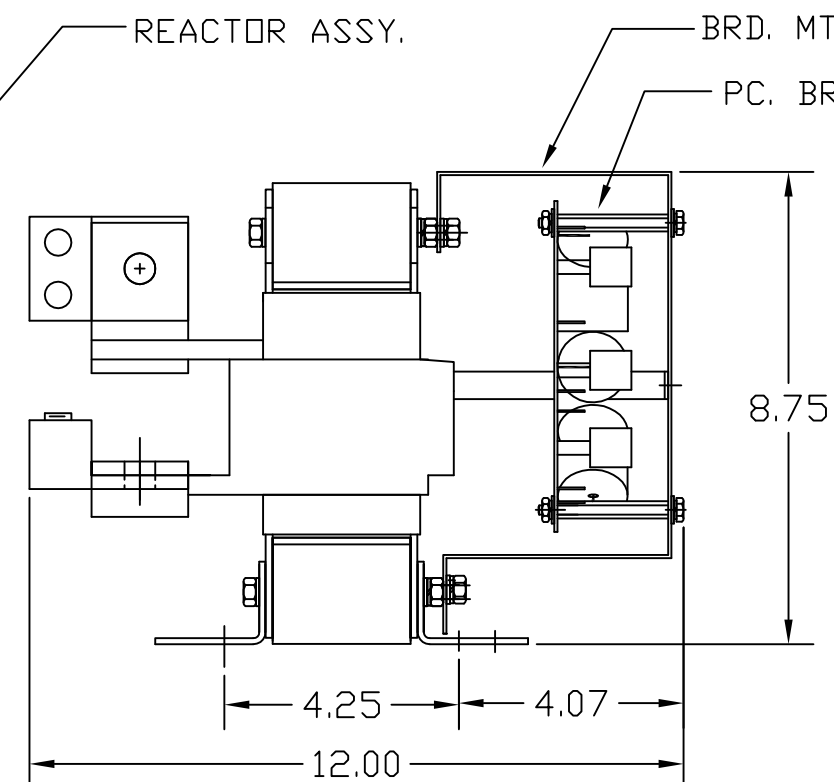
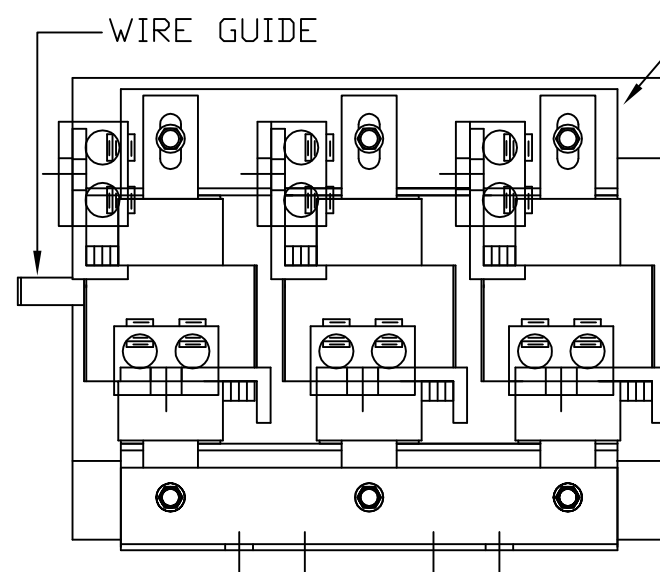
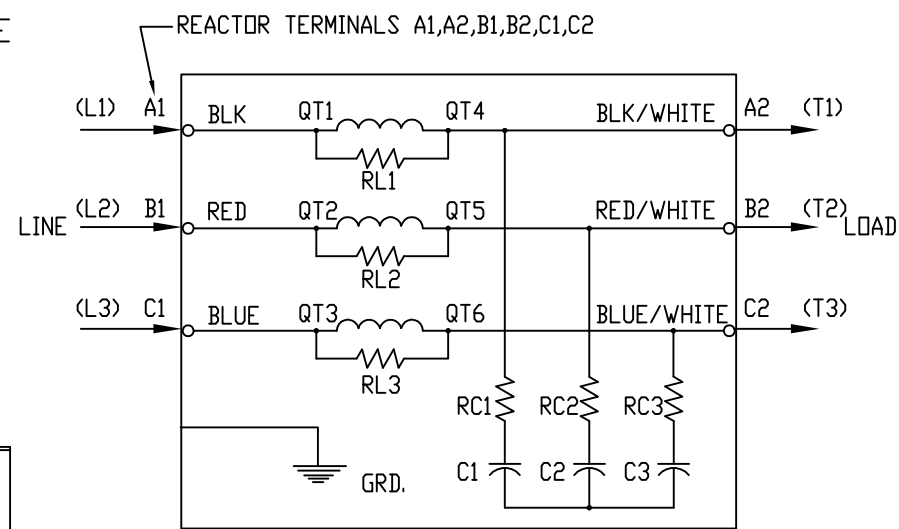
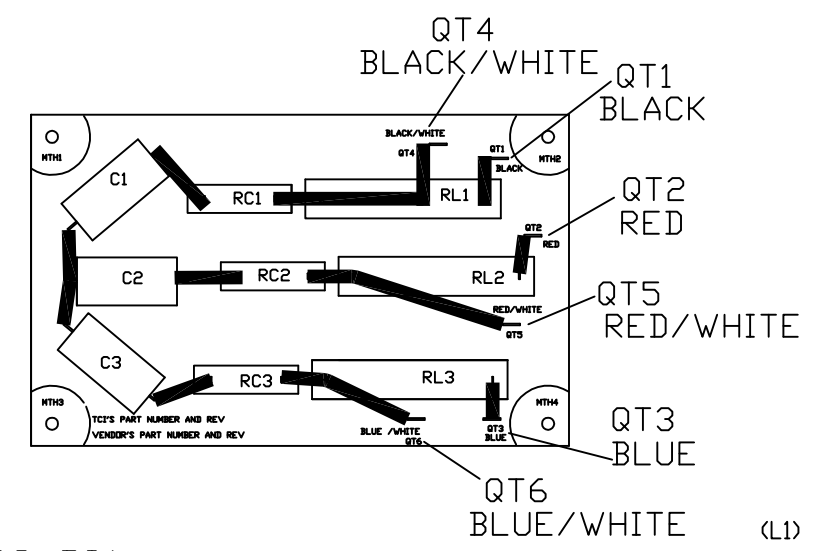
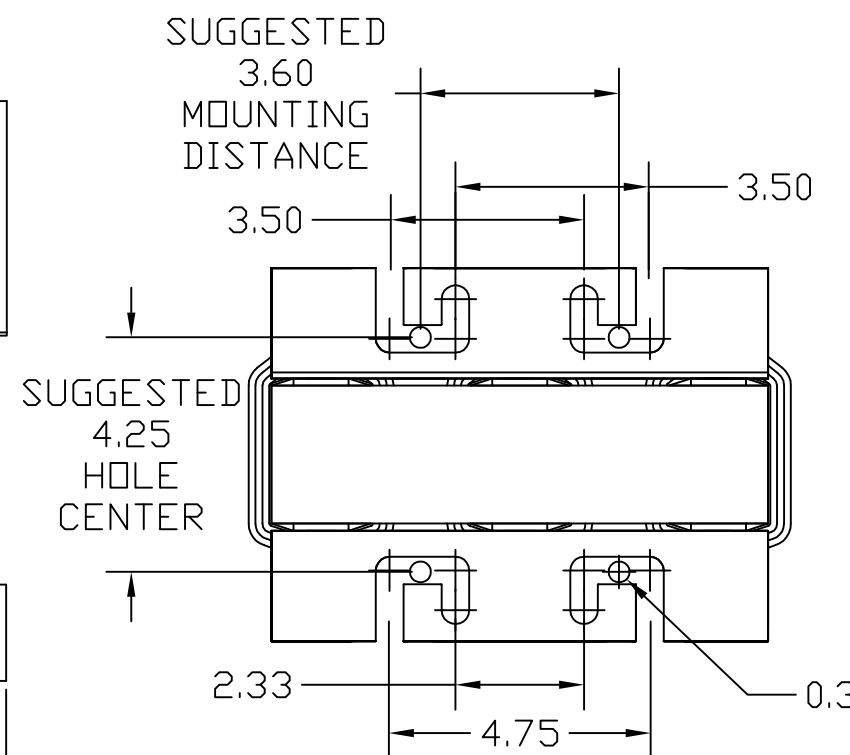


"SEE V1K INSTALLATION GUIDE FOR TERMINAL WIRE SIZE AND TORQUE"

SPECIFICATIONS:	
AMP.	362
VOLT	240-600
PHASE	3
HZ	60
WEIGHT, LBS.	80
OPEN VERSION	

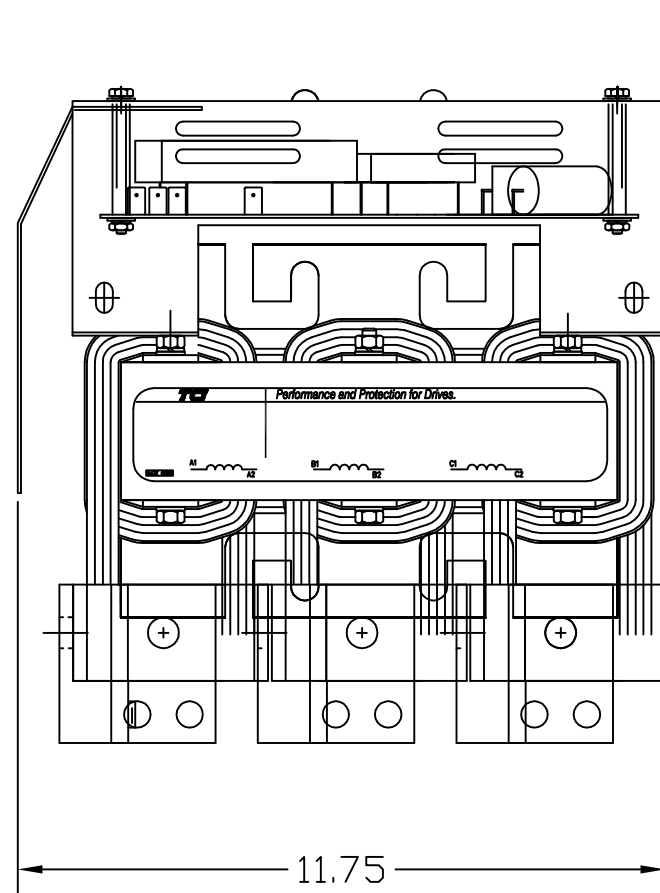

REAR VIEW

REACTOR AND BOARD ASSEMBLY CONNECTIONS

TOLERANCE UNLESS OTHERWISE NOTED:	
MOUNTING	+/- .06
OVERALL	+/- .12

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

TCL, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREJUDICE TO ANY PATENT RIGHTS OF TCL AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCL.

F	3216 ADD SEE GUIDE	11/4/14	DSW		
NO	REVISION	DATE	BY		

TOLERANCES (EXCEPT AS NOTED):	
DECIMAL	
.XX	± .03
.XXX	± .01
FRACTIONAL	
±	1/32
ANGULAR	
±	1/2°

TCL W132 N10611 GRANT DRIVE
GERMANTOWN, WI 53022

V1K362A00EX, OUTPUT FILTER
362 AMP, OPEN VERSION

EXTENDED LENGTH APPLICATIONS

DRN. BY	RJC	DATE	5/20/05	DWG. NO.	102716DG
SCALE	NONE	SIZE	B	SHT. 1 OF 1	