






See V1K Installation Guide For Terminal Wire Size And Torque Information.
 Note: Maintain Clearance of 3 Inches On All Sides To Other Equipment.

V1K Part Number	Rated Voltage	Amps	Phase	Weight (LBS)
V1K35A03	600	35	3	56
V1K35A03EX	600	35	3	56
V1K45A03	600	45	3	56
V1K45A03EX	600	45	3	56
V1K55A03	600	55	3	56
V1K55A03EX	600	55	3	56

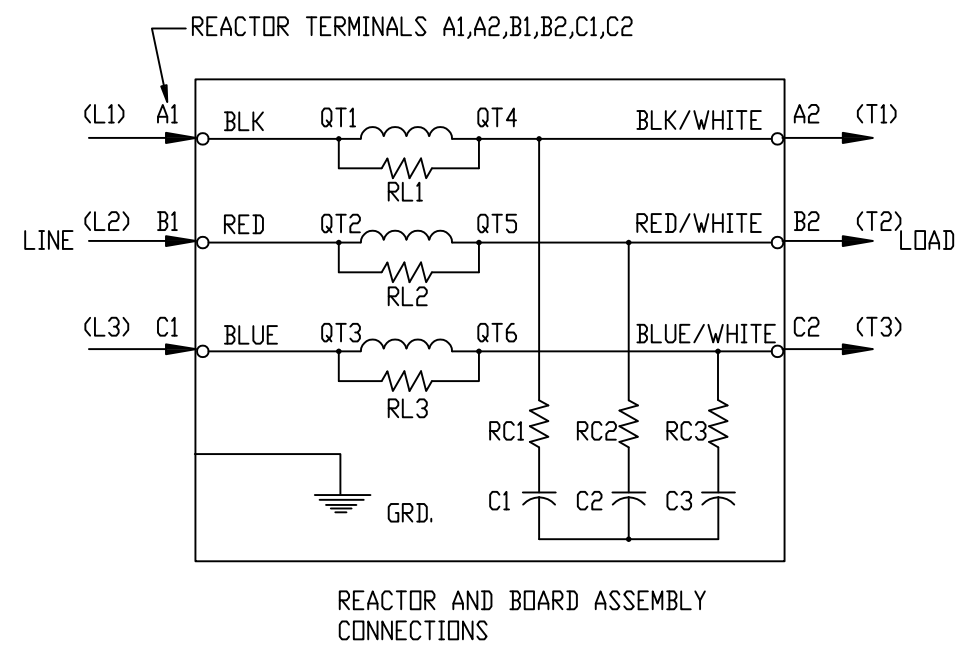

Suggested Customer Entry Side Of Enclosure.
 Suggested Customer Entry Bottom Of Enclosure.

(Customer Connections) Markings On Terminal Block For Reference Only.

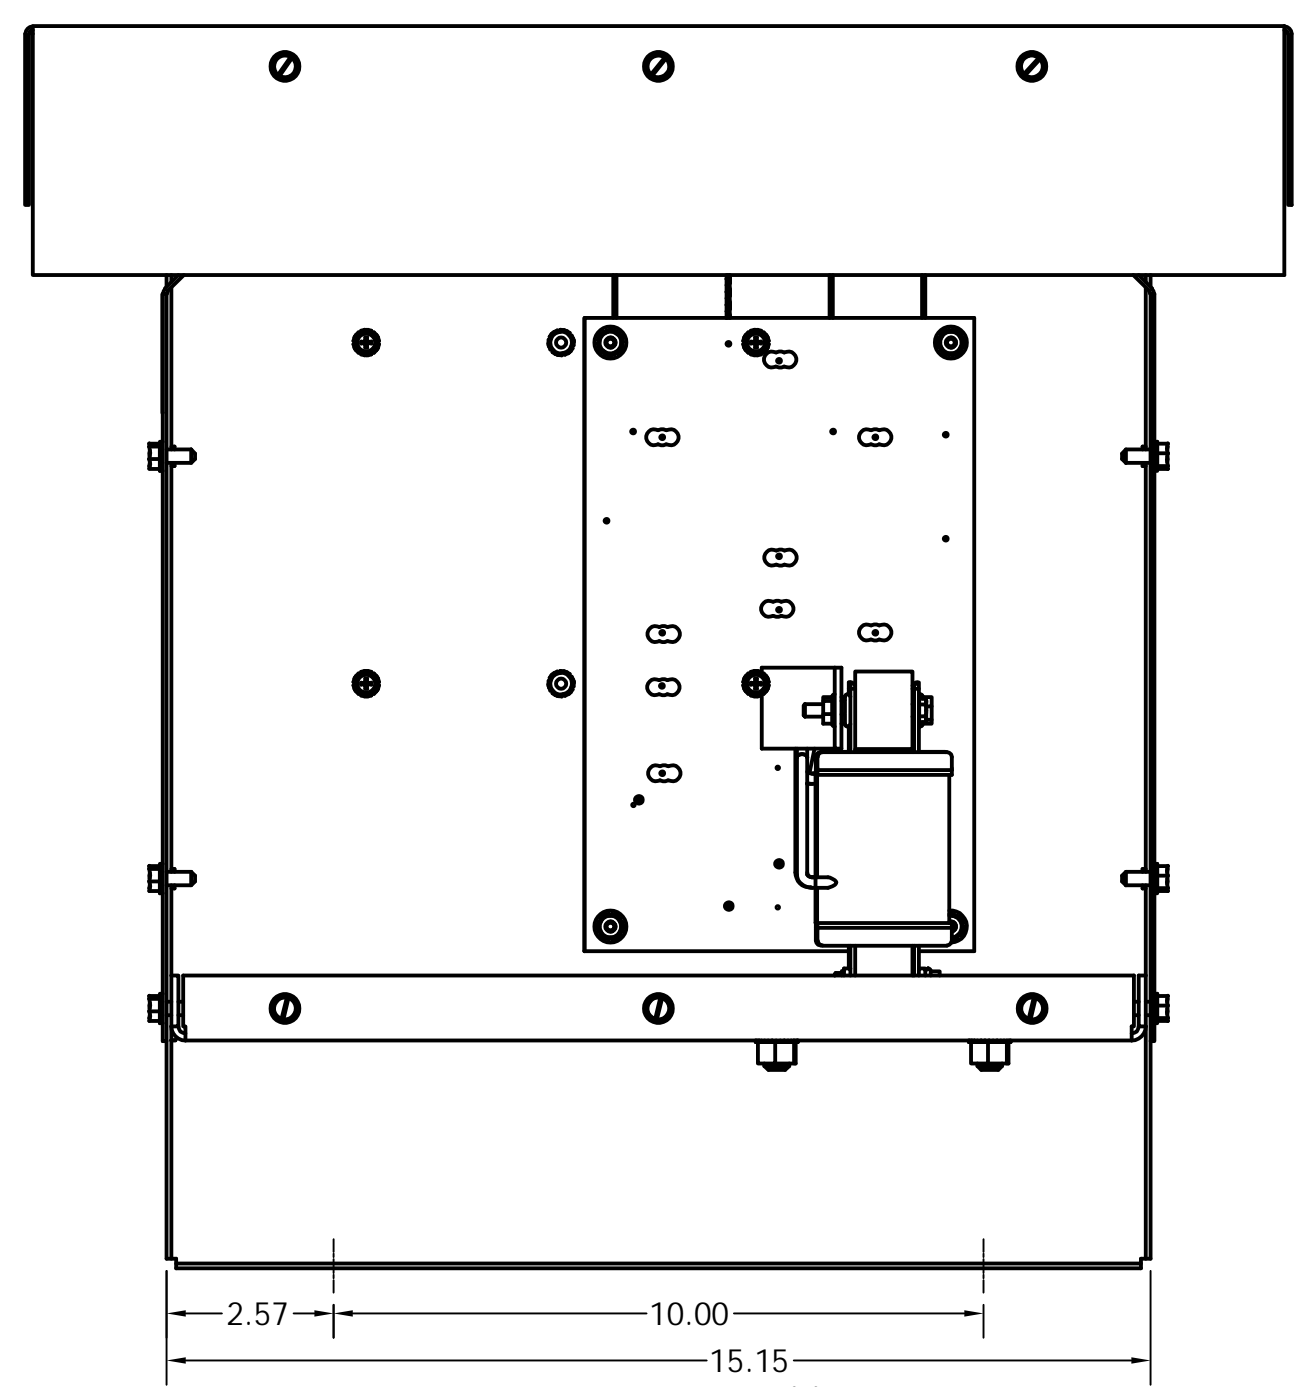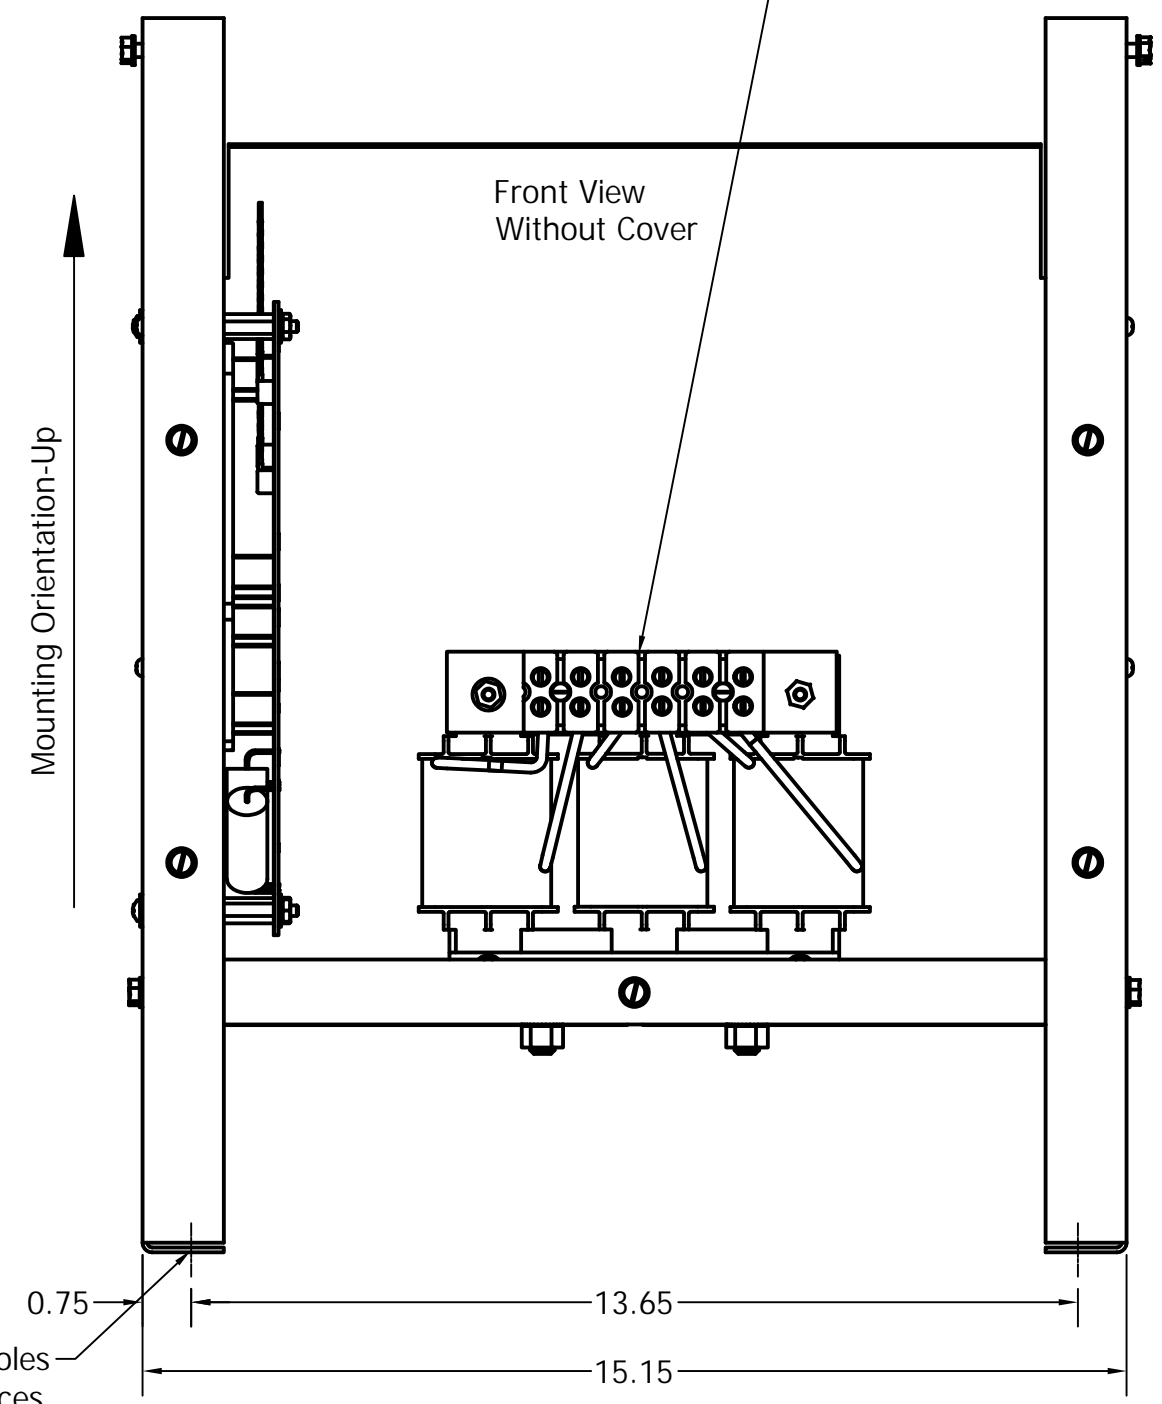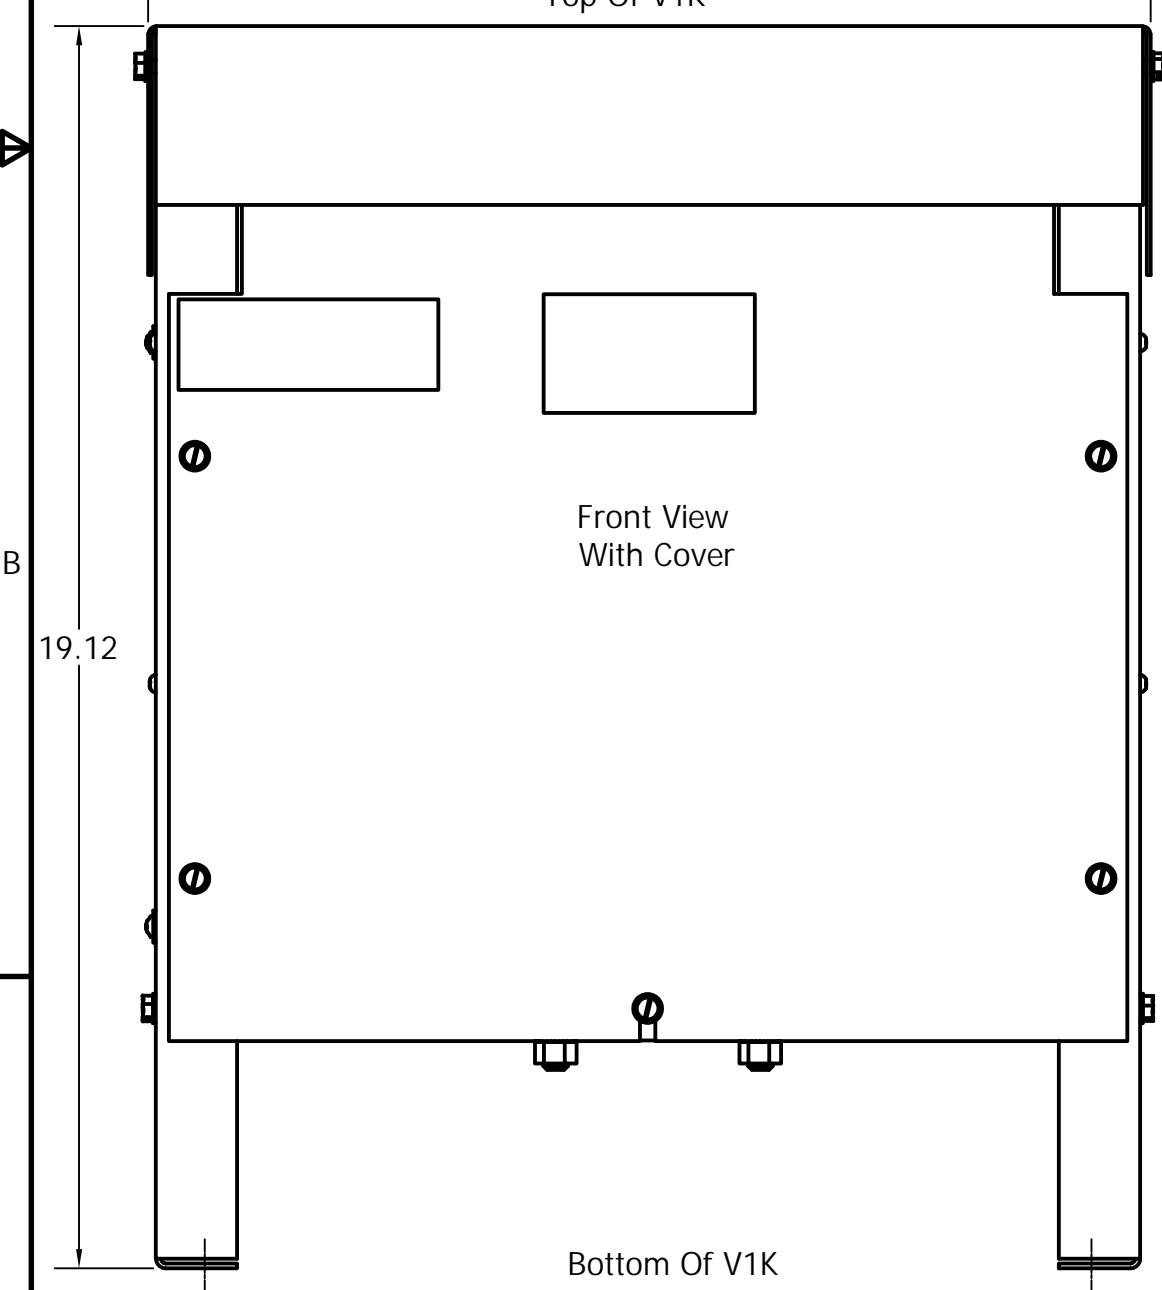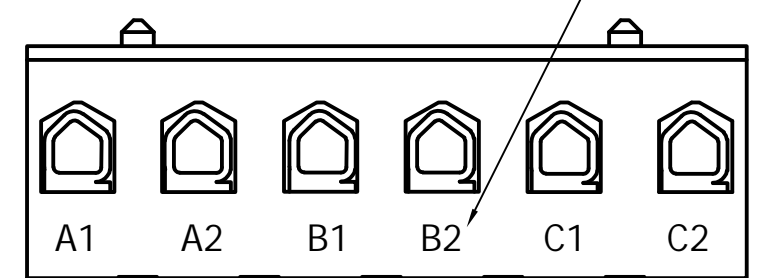

Material(s) Shall be RoHS Compliant

Customer Is Responsible For Installation to Meet All National And Local Electrical Codes.
 NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY WITH UL514B FOR TYPE 3R ENCLOSURES

TCL, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREJUDICE TO ANY PATENT RIGHTS OF TCL AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCL.	TOLERANCES (EXCEPT AS NOTED)		W132 N10611 Grant Drive Germantown, WI 53022 V1K, TYPE 3R 35 Amps to 55 Amps					
	DECIMAL							
	.XX ± .25 .XXX ± .10							
	FRACTIONAL ± 1/16							
A	4030 V1K DRAWING UPDATE	6/23/17	DSW	DRN BY SCALE: TO FIT	DATE: 4/26/17	APRVD:	SIZE C	104226DG
NO	REVISION	DATE	BY	ANGULAR ± 1°				SHT 1 OF 1