


SEE V1K INSTALLATION GUIDE FOR TERMINAL WIRE SIZE AND TORQUE
 NOTE: MAINTAIN CLEARANCE OF 3 INCHES ON ALL SIDES TO OTHER EQUIPMENT


V1K Part Number	Rated Voltage	Amps	Phase	Weight (LBS)
V1K600A03	600	600	3	297
V1K600A03EX	600	600	3	297

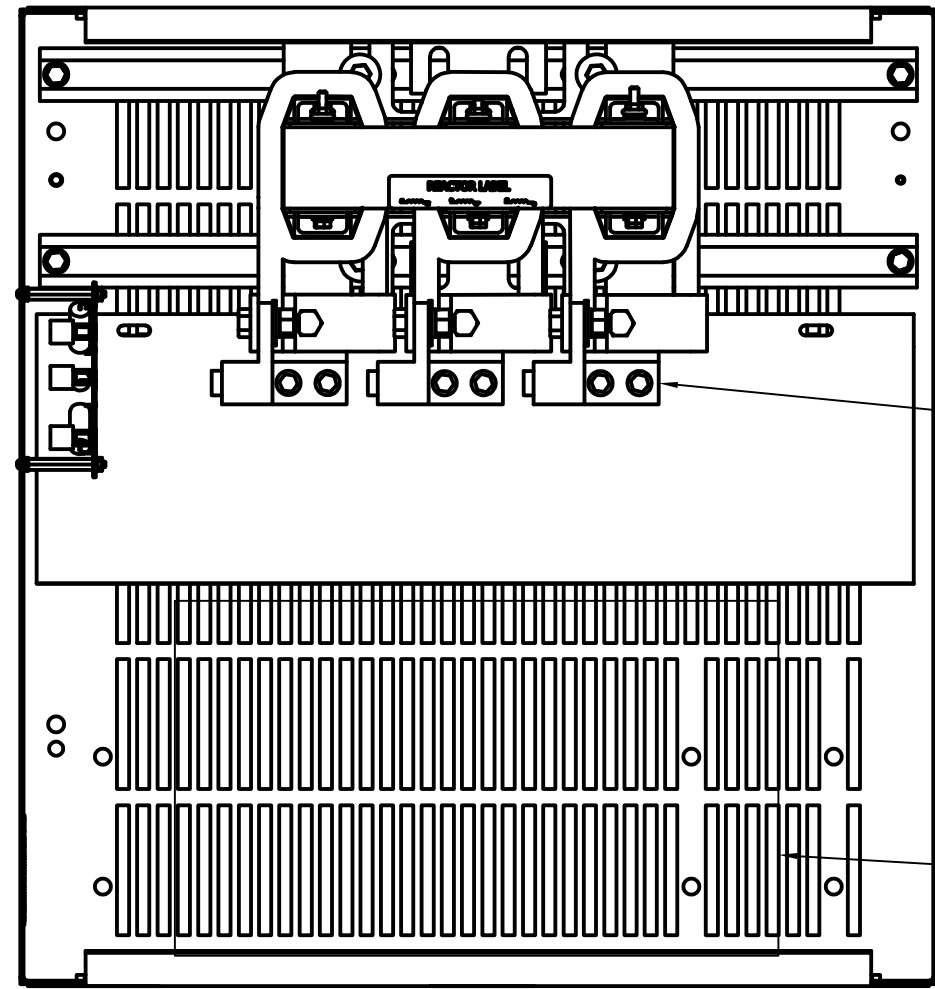


(CUSTOMER CONNECTIONS)
 MARKINGS ON COIL
 FOR REFERENCE ONLY

SUGGESTED
 CUSTOMER ENTRY
 SIDE OF ENCLOSURE

SUGGESTED CUSTOMER ENTRY
 BOTTOM OF ENCLOSURE

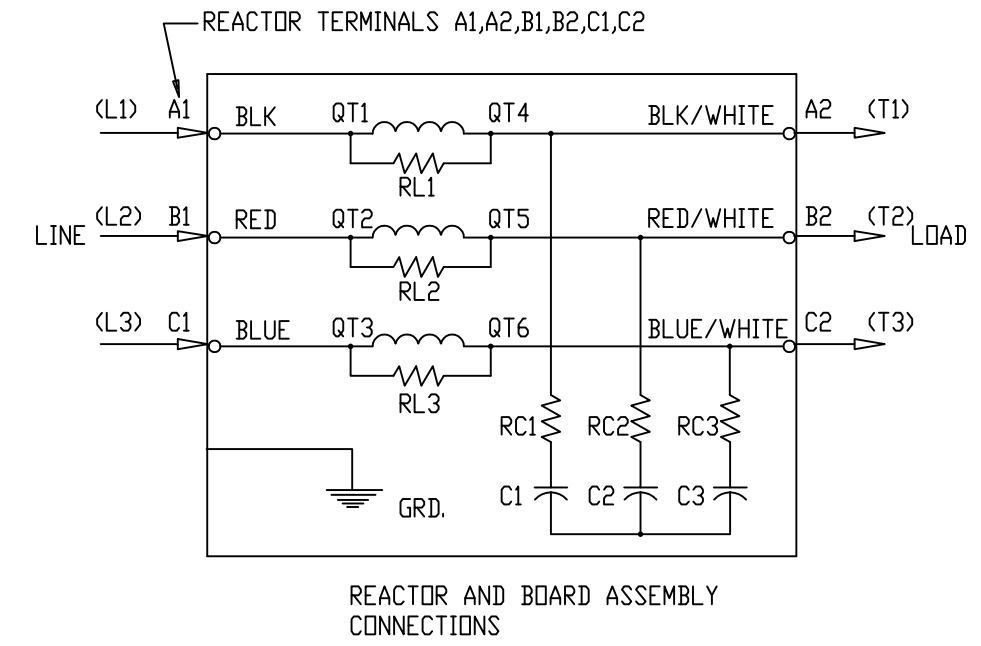


REACTOR AND BOARD ASSEMBLY
 CONNECTIONS

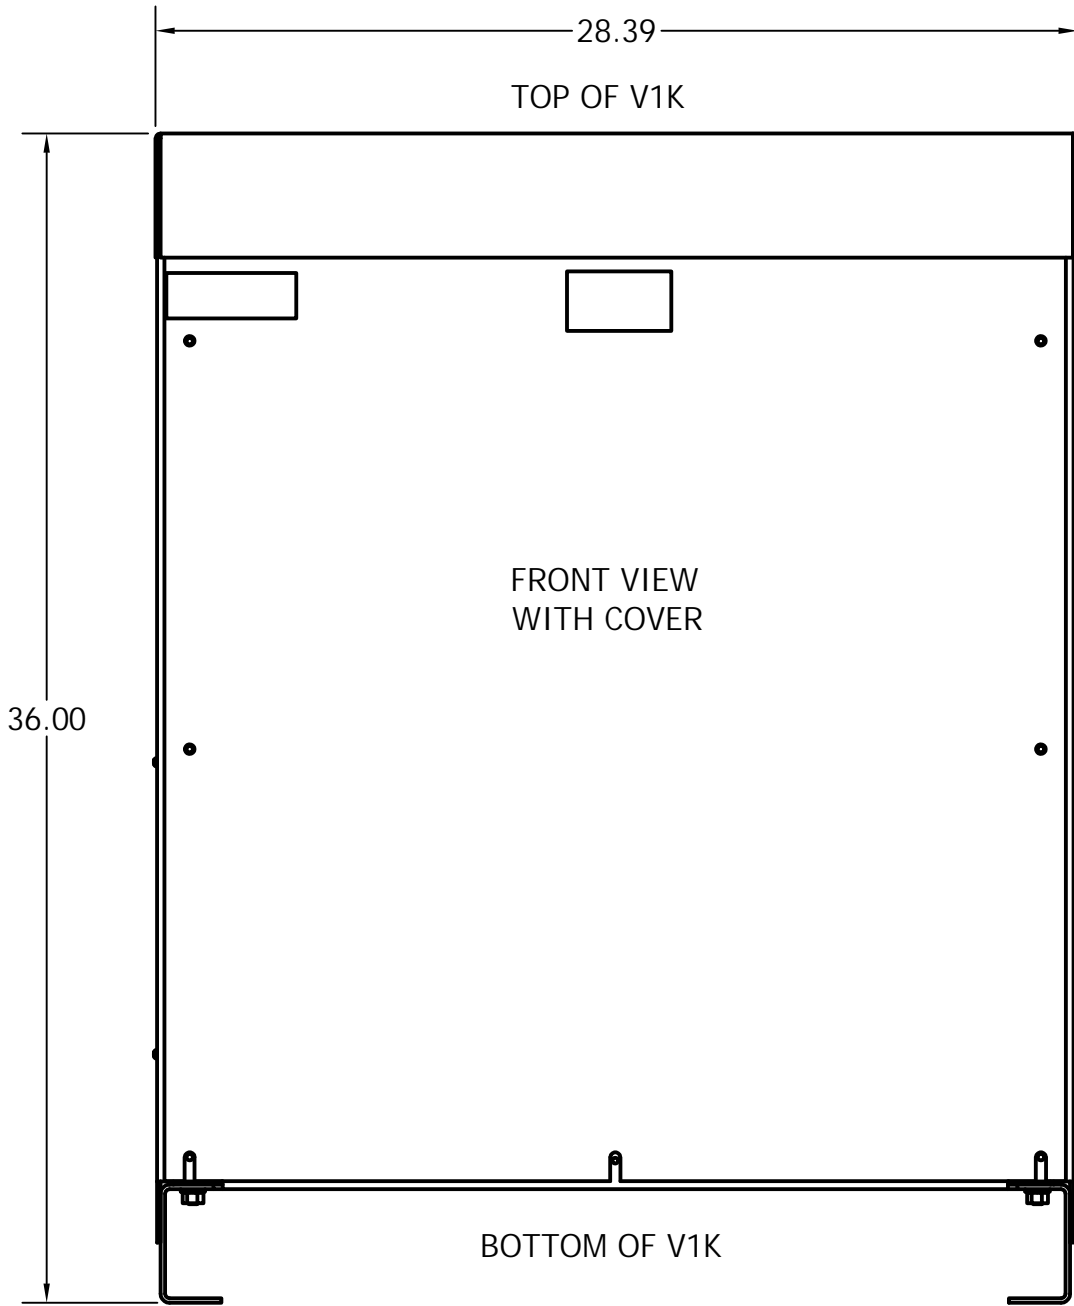

TOP OF V1K

FRONT VIEW
 WITH COVER


BOTTOM OF V1K

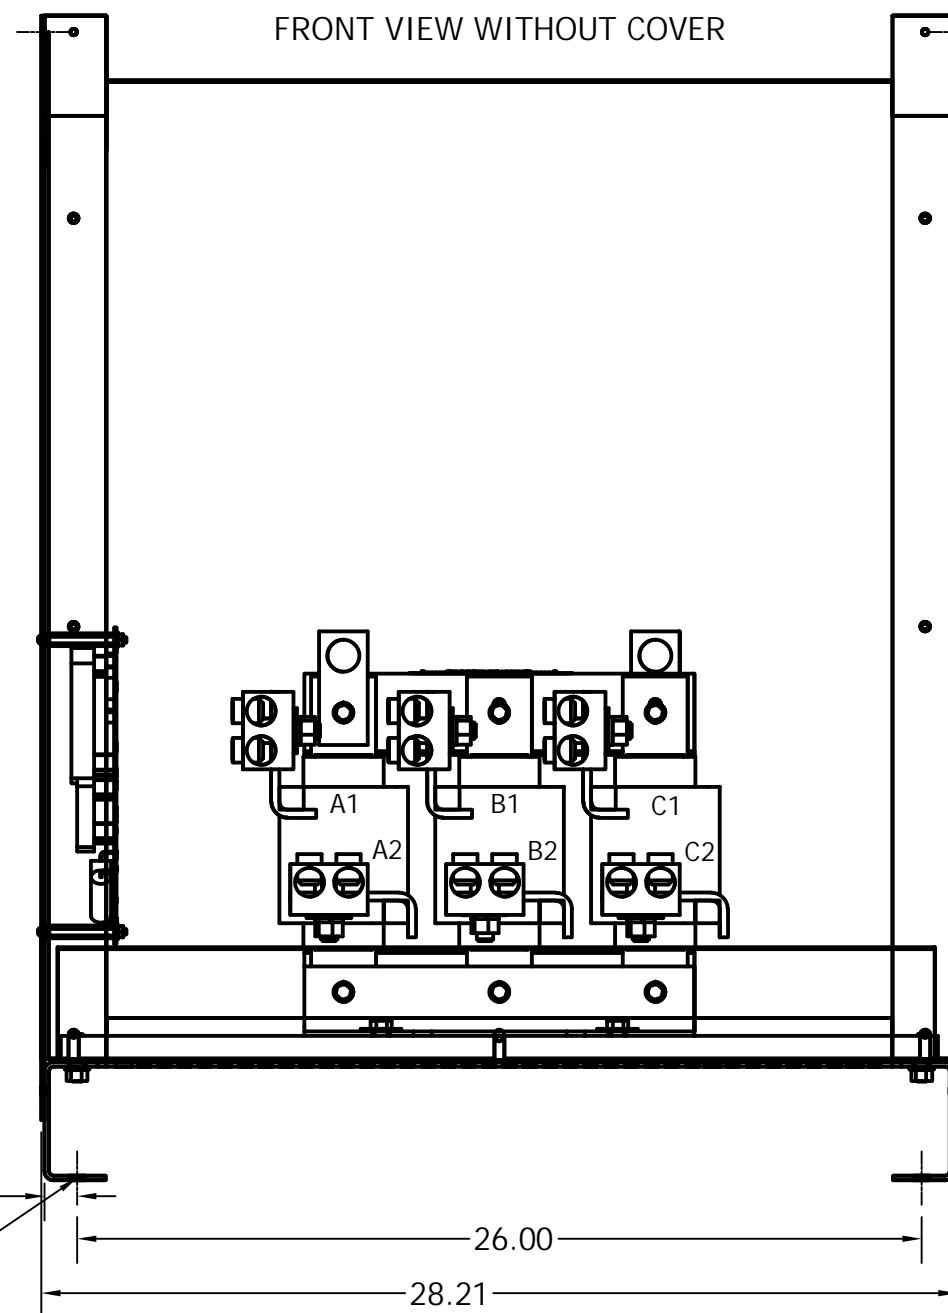

FRONT VIEW WITHOUT COVER

MOUNTING ORIENTATION UP

1.00
 0.50 DIA MOUNTING HOLES
 (4 PLACES)

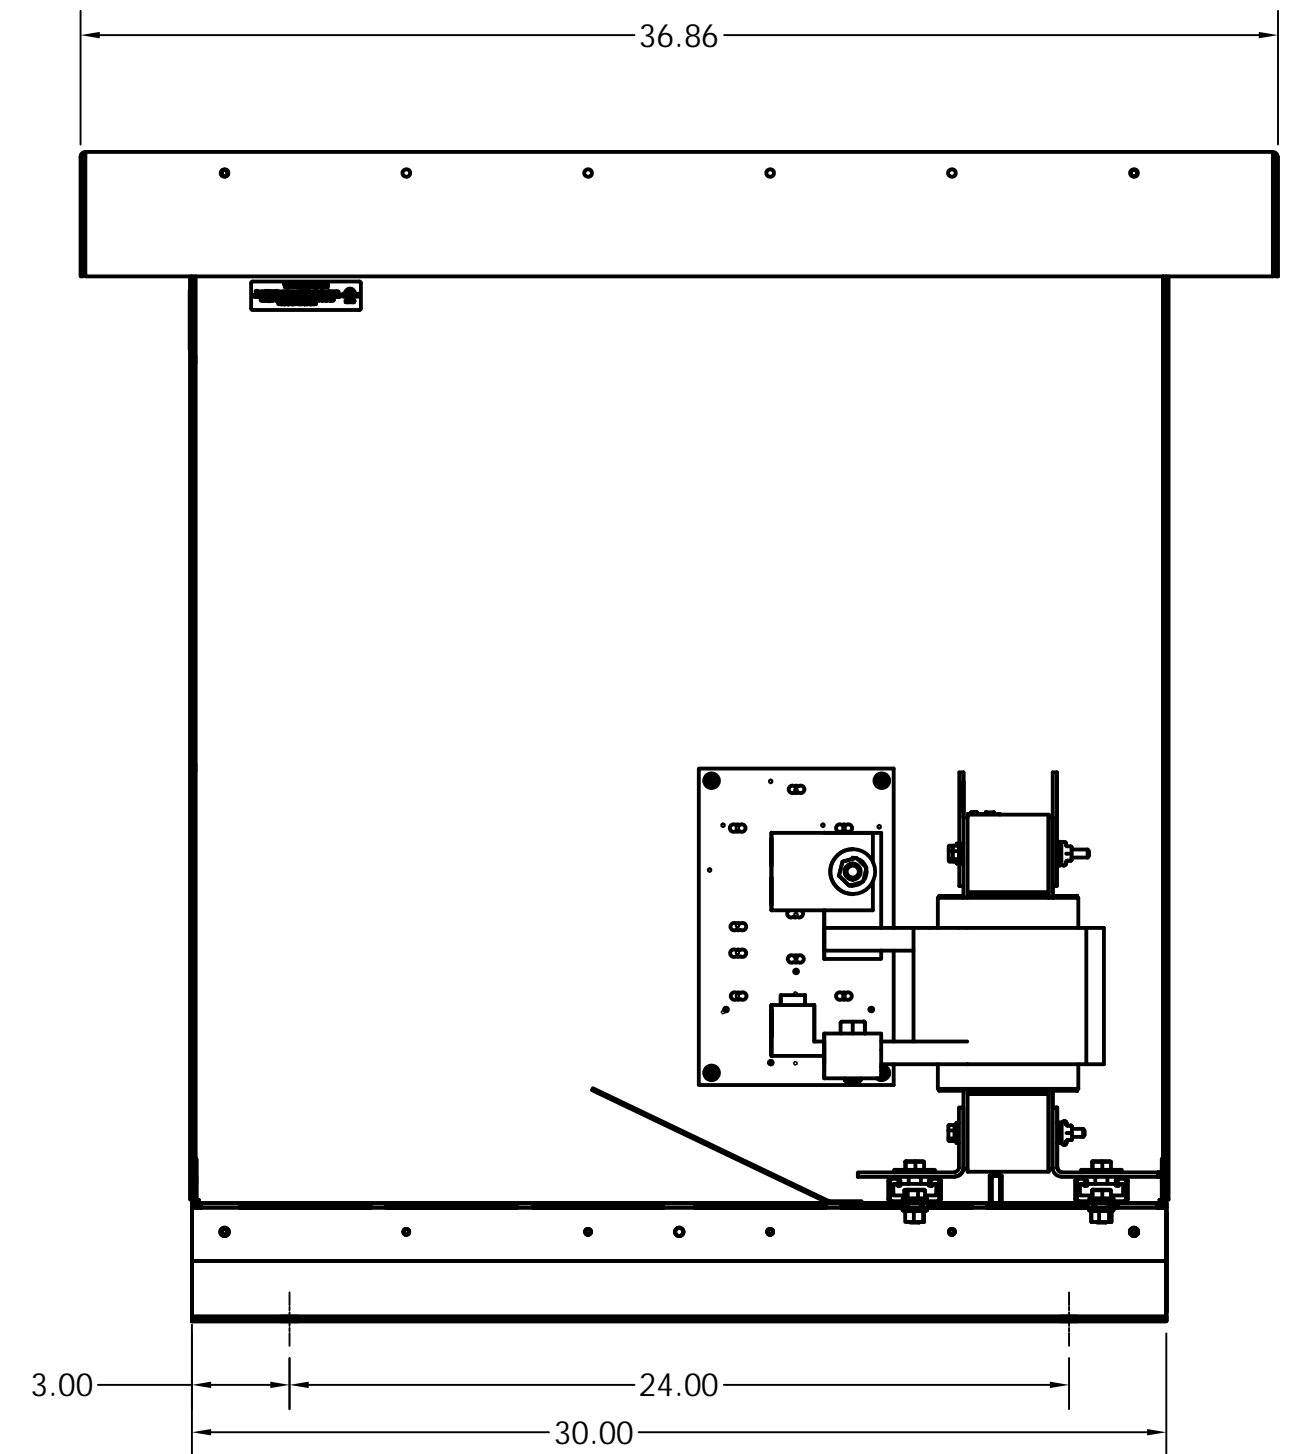

MATERIAL(S) SHALL BE RoHS COMPLIANT

NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY
 WITH UL514B FOR TYPE 3R ENCLOSURES

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO
 MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES

TCL, LLC CLAIMS
 PROPRIETARY RIGHTS IN
 THE MATERIAL HEREIN
 DISCLOSED. IT IS
 SUPPLIED WITHOUT
 PREJUDICE TO ANY
 PATENT RIGHTS OF TCL
 AND MAY NOT BE
 REPRODUCED OR USED
 TO MANUFACTURE
 ANYTHING SHOWN
 THEREIN WITHOUT
 WRITTEN PERMISSION
 FROM TCL.

NO	REVISION	DATE	BY	SCALE
C	4030 DRAWING UPDATE	6/30/17	JSM	NONE

TOLERANCES (EXCEPT AS NOTED)	
DECIMAL	.XX ± .25 .XXX ± .10
FRACTIONAL	± 1/16
ANGULAR	± 1°

TCL® W132 N10611 Grant Drive
 Germantown, WI 53022

V1K, TYPE 3R
600 AMPS

DRN. BY: JSM DATE: 6/30/17 SIZE: C
 SCALE: NONE APRVD: 104239DG
 SHT. 1 OF 1