

600 VOLTS  
80Hz

FROM  
DRIVE

U  
V  
W

CUSTOMER CONNECTIONS  
INTO SINEWAVE FILTER


CUSTOMER  
CONNECTIONS

USE COPPER WIRE  
60°C MIN <100 A.  
75°C MIN ≥100 A.

T1  
T2  
T3 TO  
LOAD


GRD

POWER SCHEMATIC

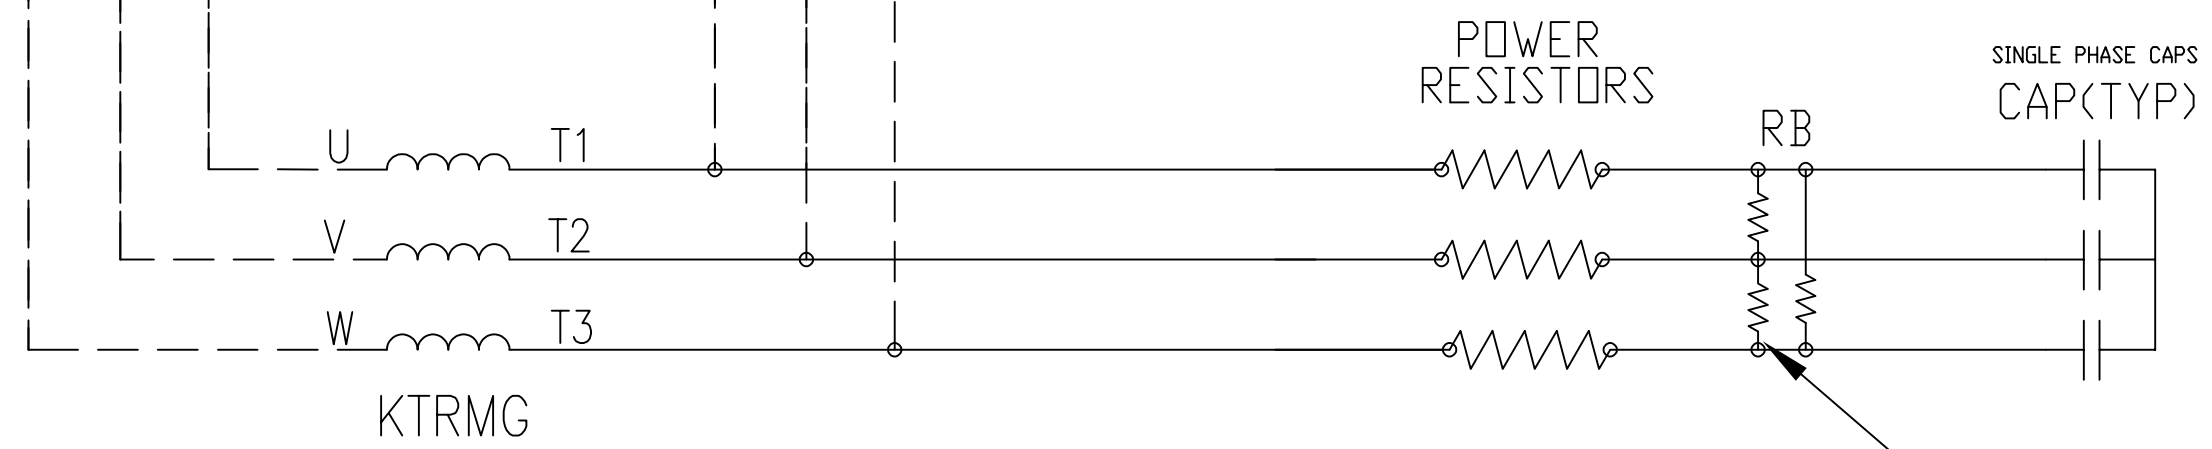

BLEEDER RESISTORS  
ON CAPACITORS

CUSTOMER IS RESPONSIBLE FOR INSTALLATION  
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES

				TOLERANCES (EXCEPT AS NOTED)	 W132 N10611 Grant Drive Germantown, WI 53022
				DECIMAL	
				,XX ± NA ,XXX ± NA	
				FRACTIONAL ± NA	
				ANGULAR ± NA	DRN. BY DSW
NO	REVISION	DATE	BY		DATE 1/24/09
					DWG. NO. 26911
					APRVD. B
					SCALE 1/8"=1" SHT.1 OF 1