

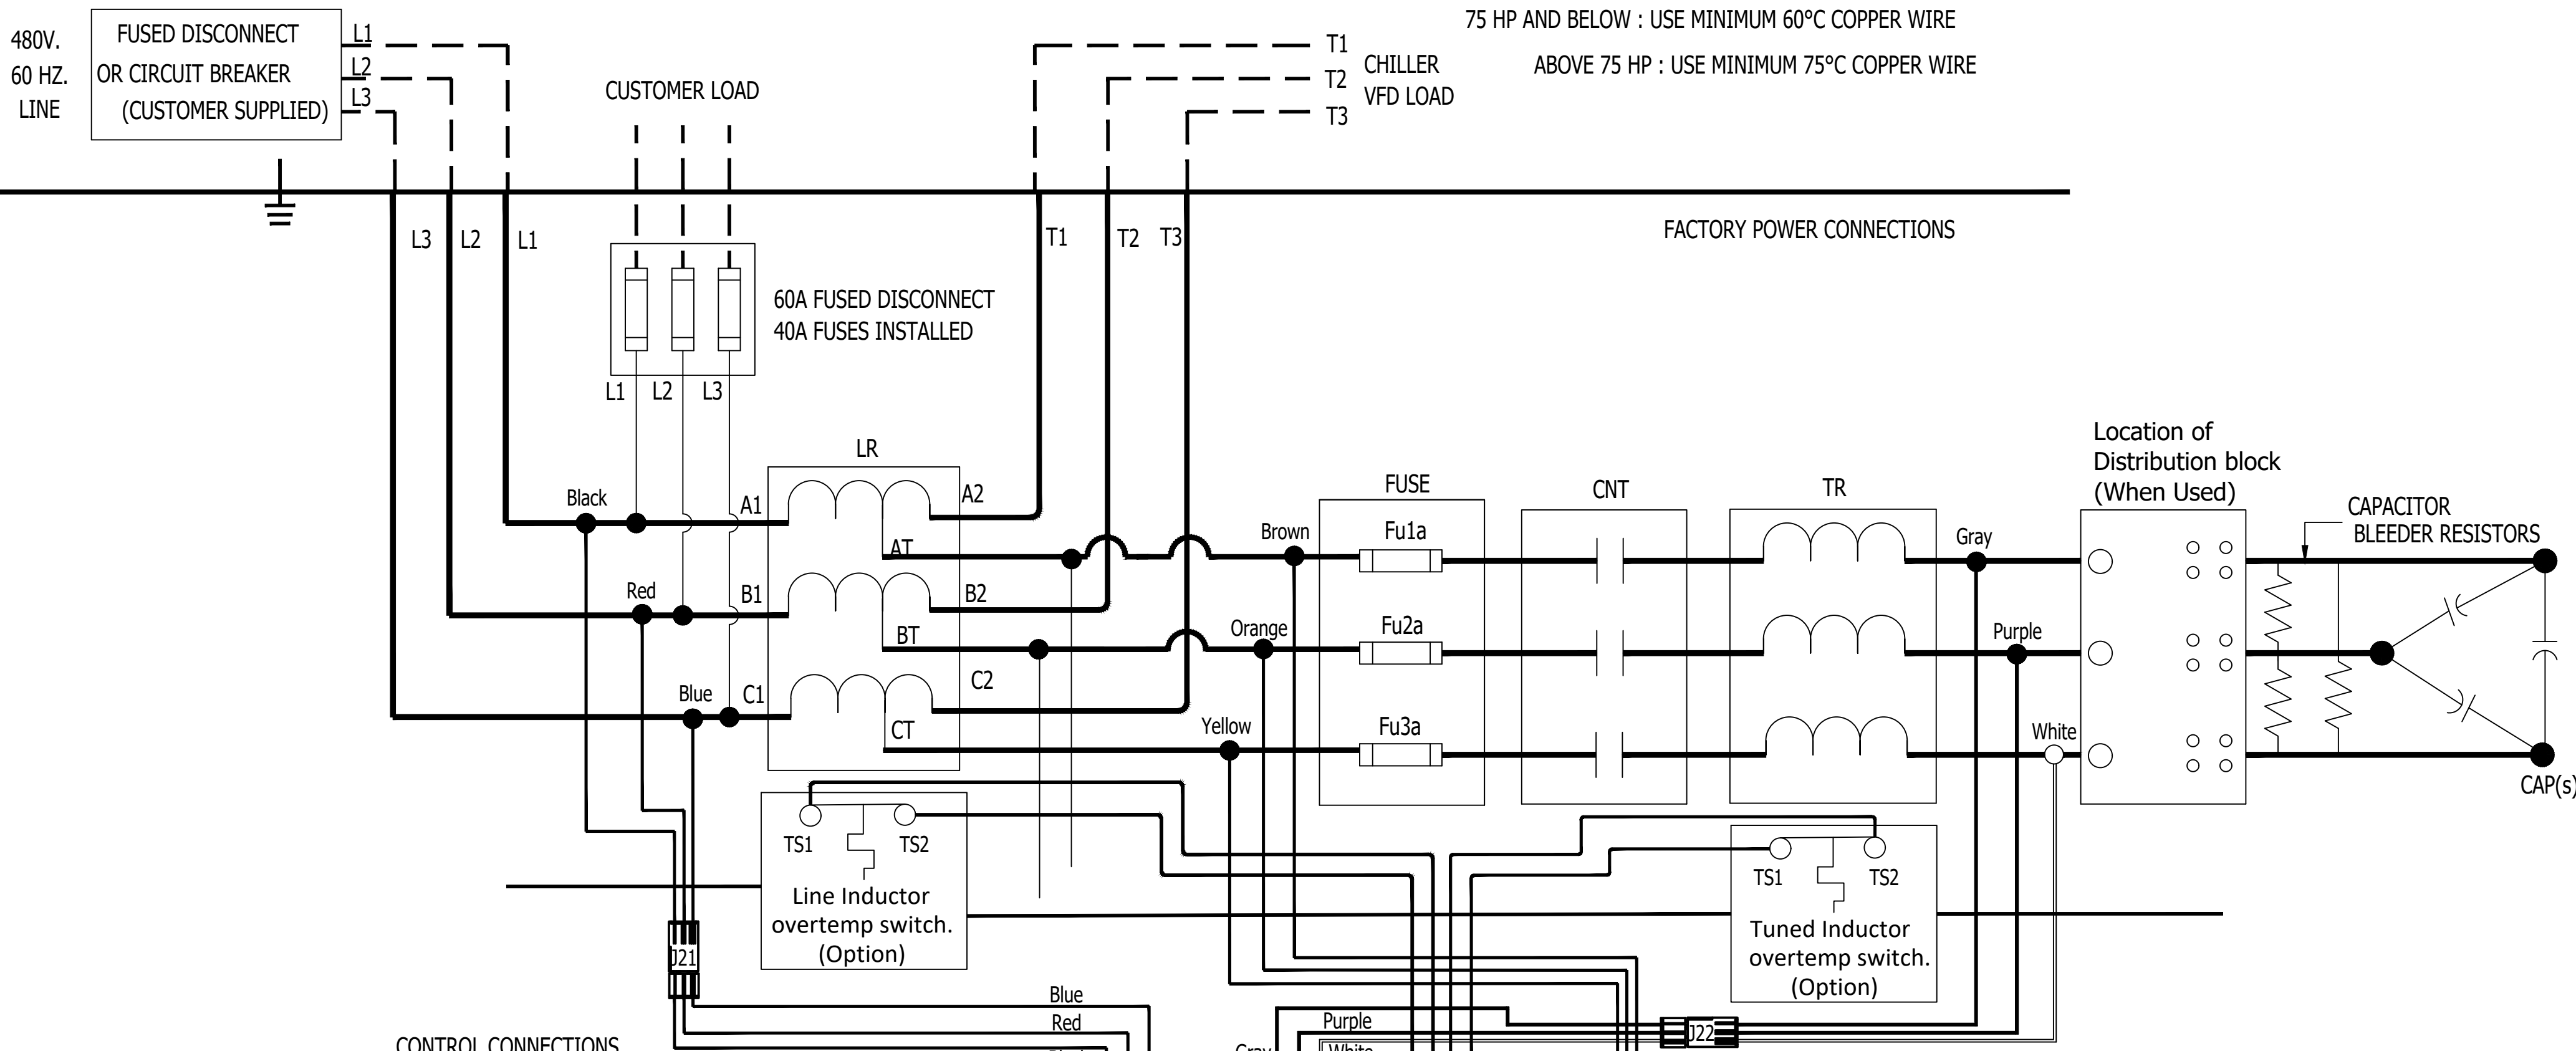


CUSTOMER CONNECTIONS

75 HP AND BELOW : USE MINIMUM 60°C COPPER WIRE  
 ABOVE 75 HP : USE MINIMUM 75°C COPPER WIRE

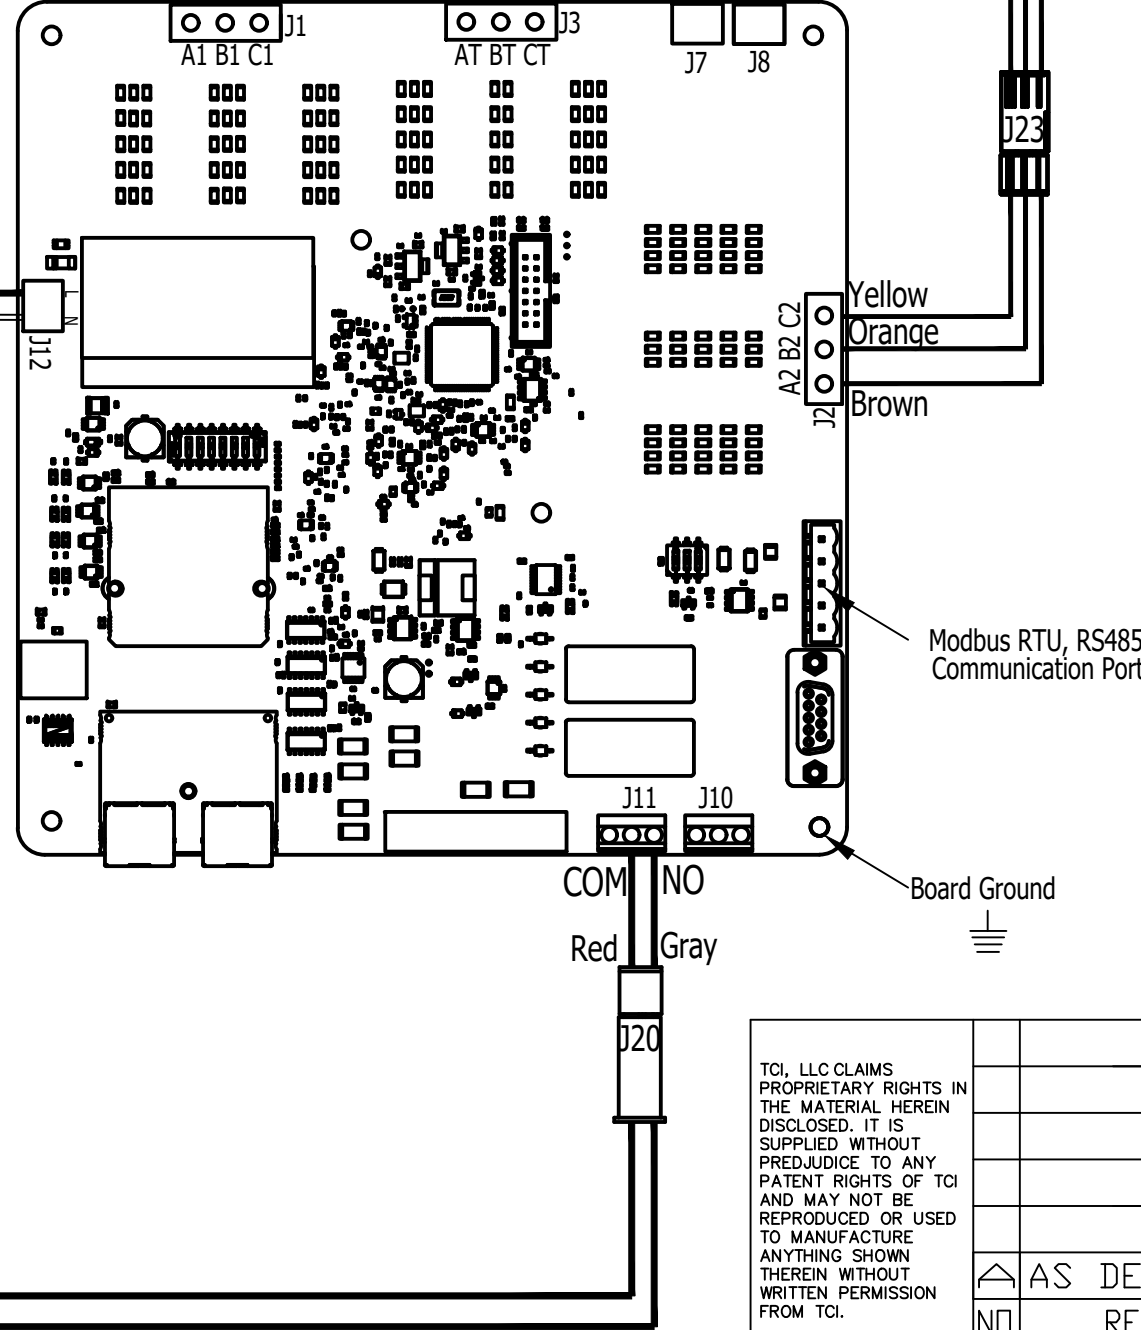

CONTROL CONNECTIONS

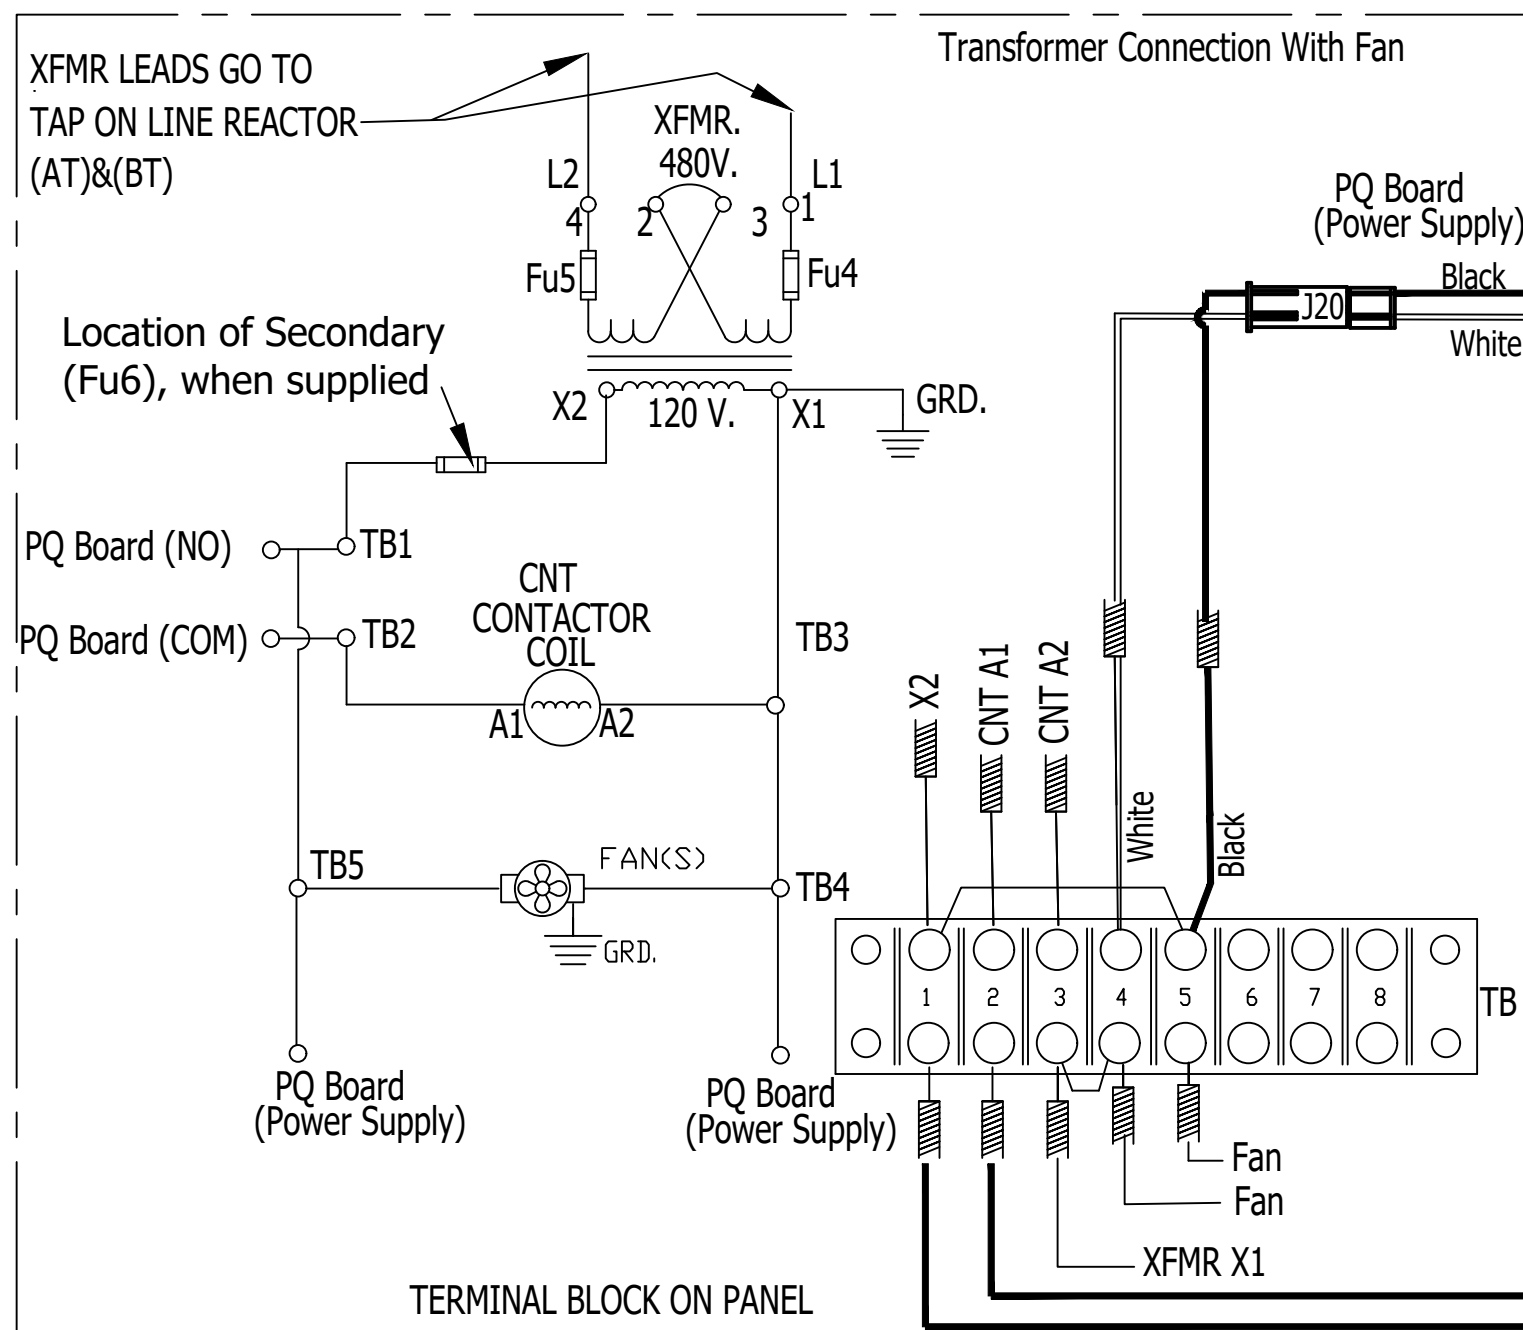

TCl, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREJUDICE TO ANY PATENT RIGHTS OF TCl AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCl.

AS DESIGNED	04/12/21	JRN	
REVISION	DATE	BY	

TOLERANCES (EXCEPT AS NOTED)	DECIMAL	.XX ± N/A
FRACTIONAL	± N/A	.XXX ± N/A
ANGULAR	± N/A	
SCALE	NONE	SIZE

**TCl** W132 N10611 Grant Drive  
 Germantown, WI 53022  
 © TCl, 2021

HARMONICGUARD LOW CAPACITANCE  
 480V SCHEMATIC  
 FAN, FUSED DISCONNECT, CONTACTOR CONTROL VERSION  
 DRN. BY JRN DATE 04/12/21 DWG. NO. 31462-40  
 SCALE NONE SIZE SHT. 1 OF 1