

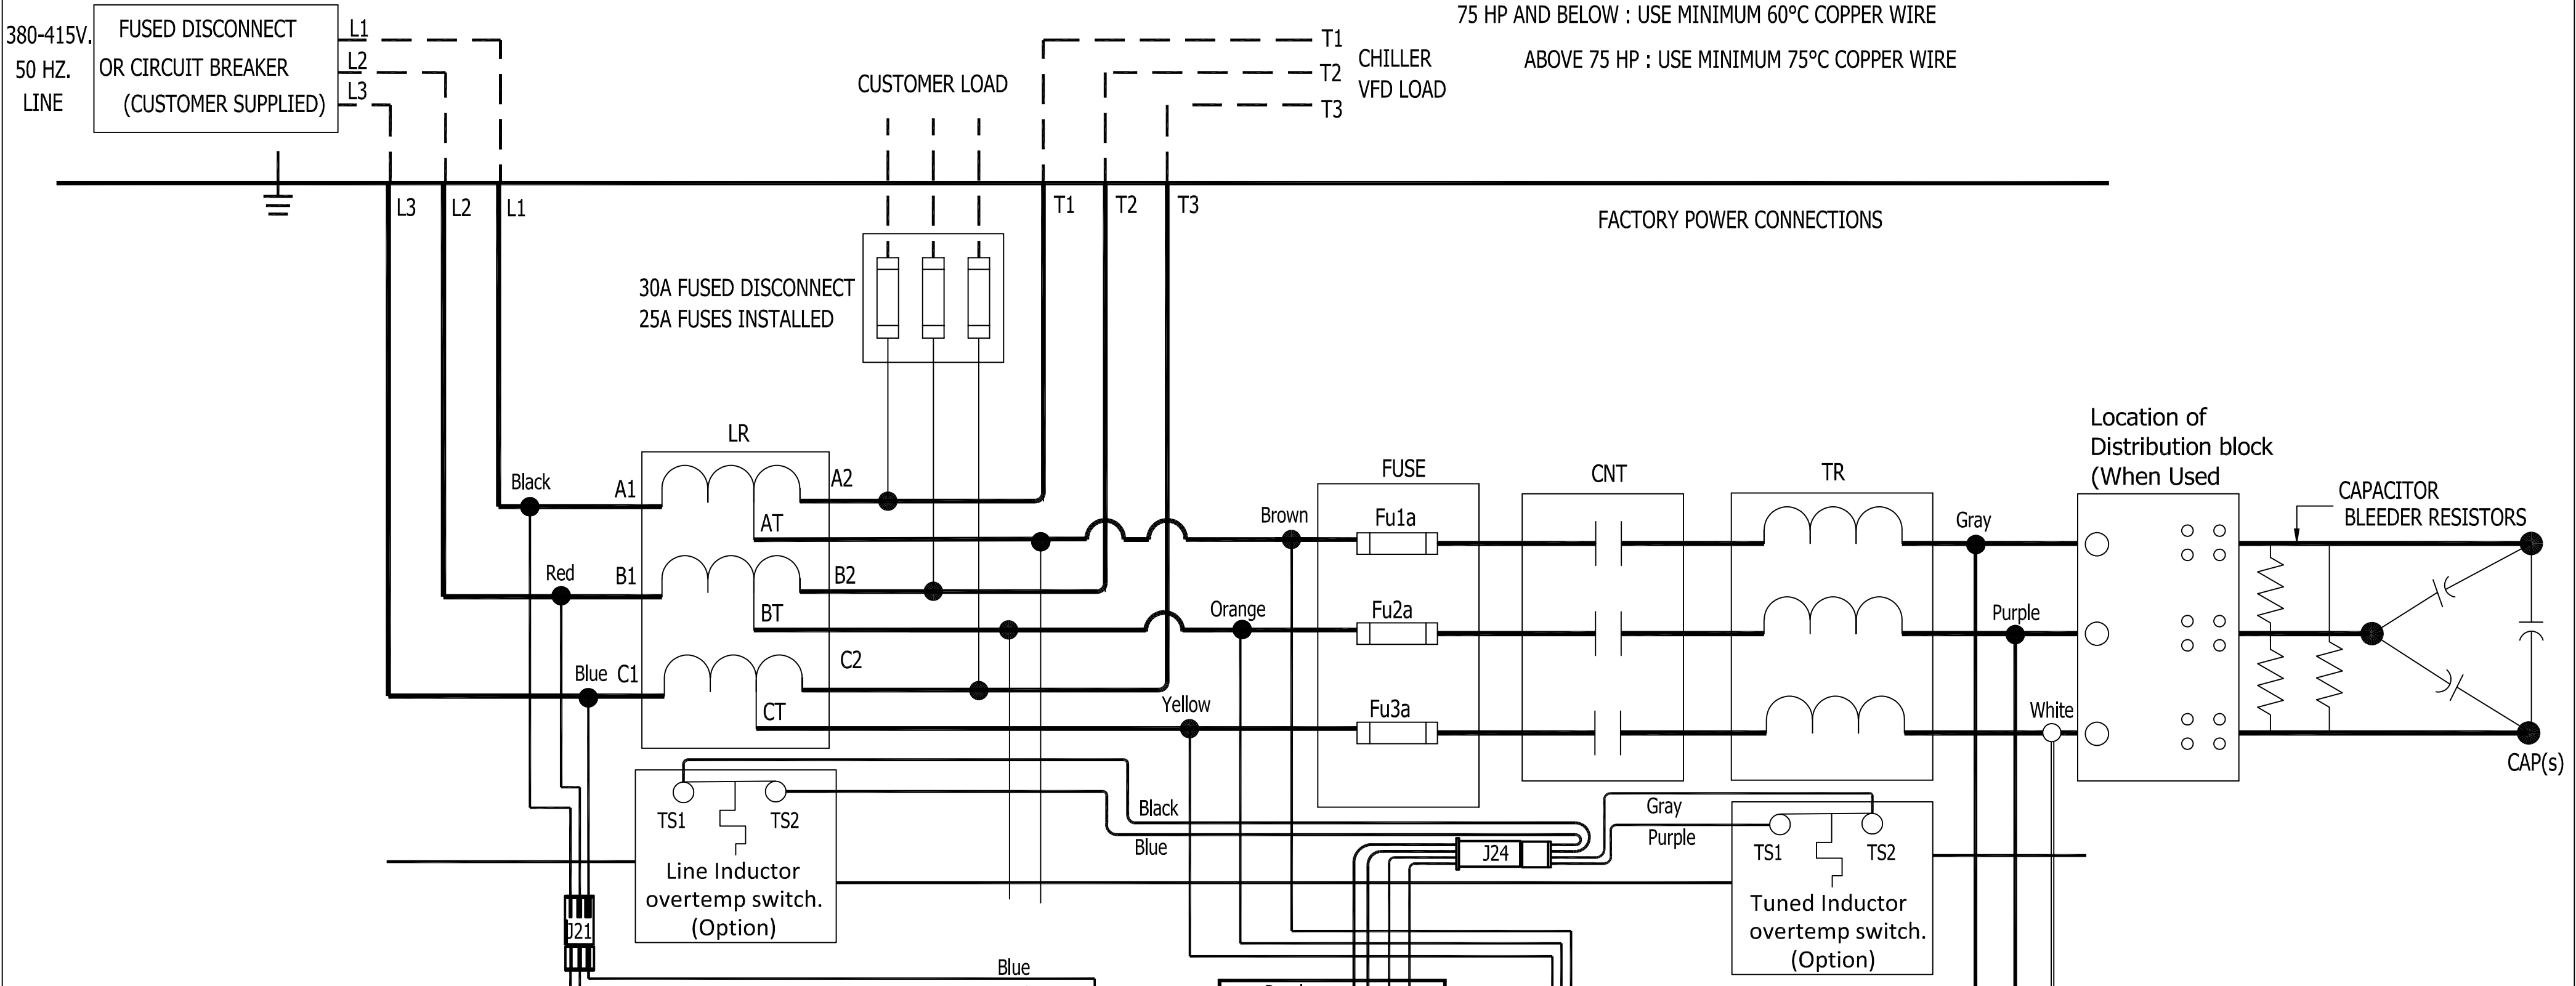


CUSTOMER CONNECTIONS

75 HP AND BELOW : USE MINIMUM 60°C COPPER WIRE  
 ABOVE 75 HP : USE MINIMUM 75°C COPPER WIRE

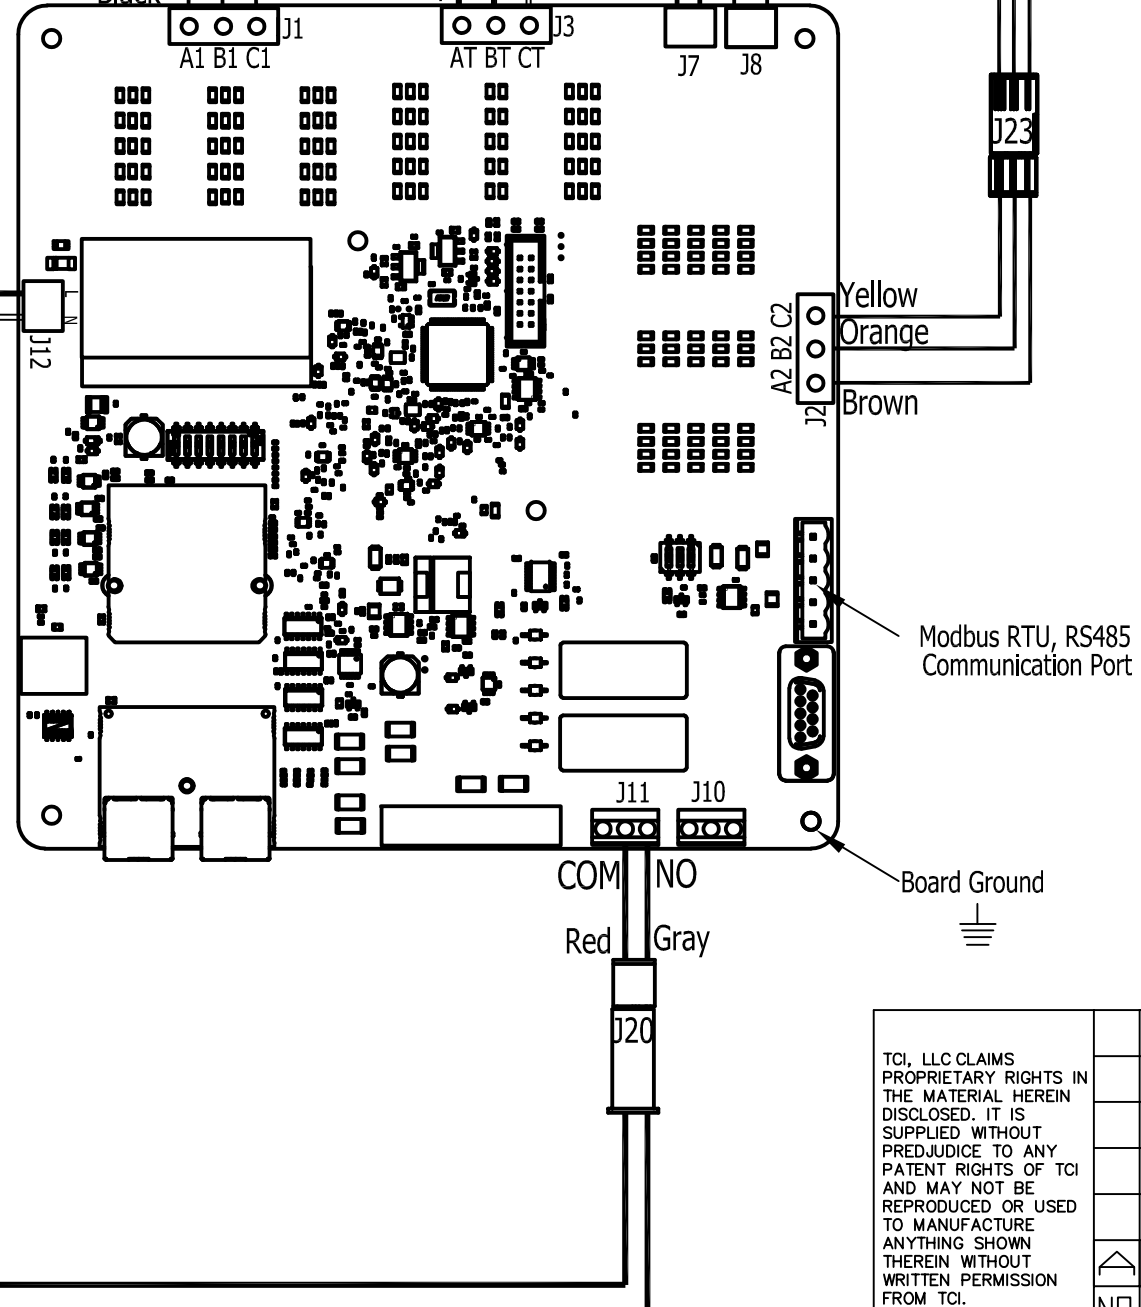

CONTROL CONNECTIONS

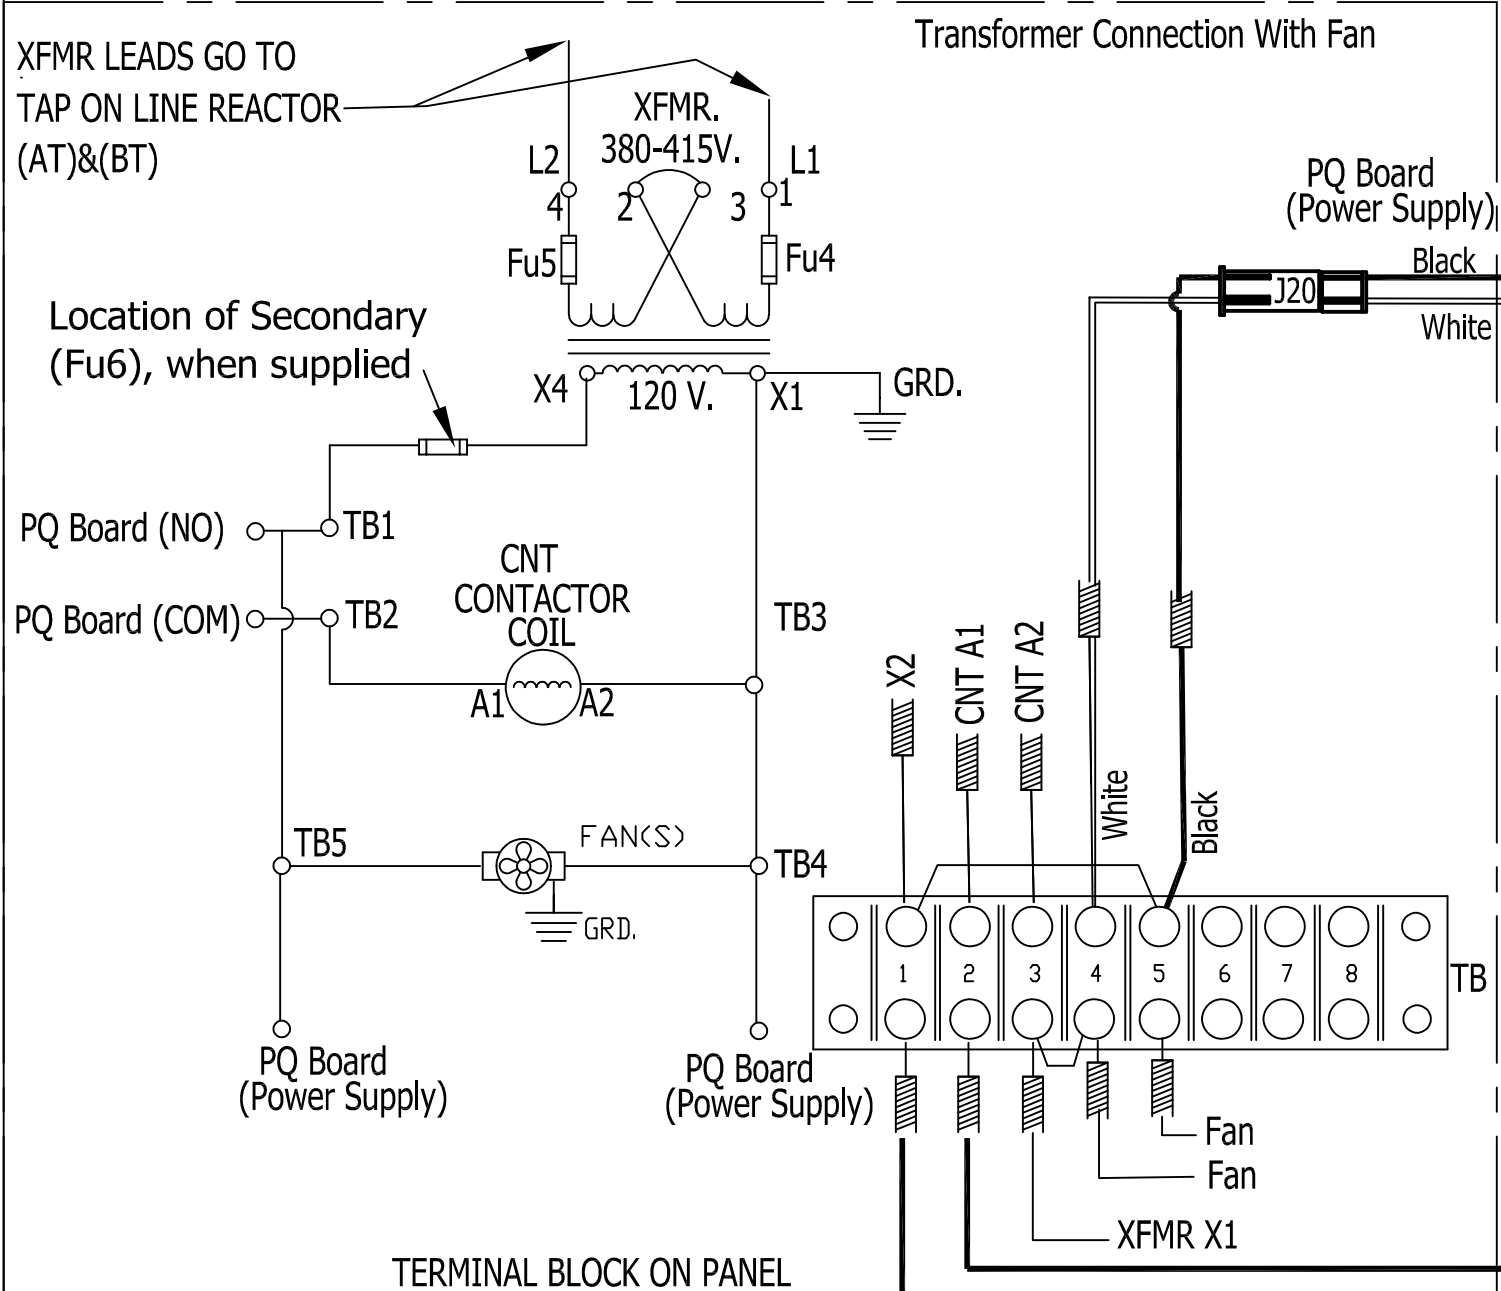

TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN. IT IS SUPPLIED WITHOUT PREJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCI.				TOLERANCES (EXCEPT AS NOTED) DECIMAL		TCI® W132 N10611 Grant Drive Germentown, WI 53022	
AS DESIGNED				.XX ± N/A		HARMONICGUARD LOW CAPACITANCE	
REVISION				.XXX ± N/A		380-415V SCHEMATIC	
DATE				FRACTIONAL ± N/A		FAN, FUSED DISCONNECT, CONTACTOR CONTROL VERSION	
BY				ANGULAR ± N/A		DRN. BY JRN DATE 03/26/20 DWG. NO. 31582-25-1	
SCALE NONE				SIZE		SHT. 1 of 1	