See V1K Installation Guide For
Terminal Wire Size And Torque Information.

Note: Maintain Clearance of 3 Inches On All Sides To Other Equipment.

V1K Part Number	Rated Voltage	Amps	Phase	Weight (LBS)
V1K750A00	600	750	3	135
V1K750A00EX	600	750	3	135

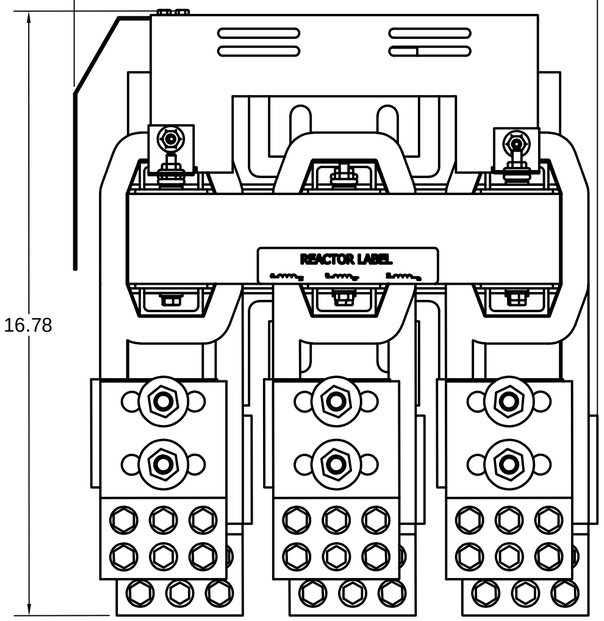

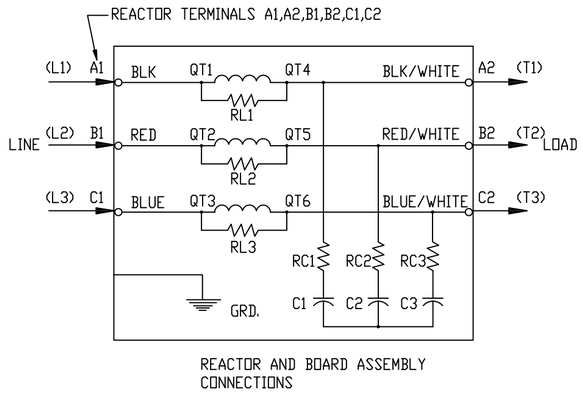

REACTOR AND BOARD ASSEMBLY
CONNECTIONS

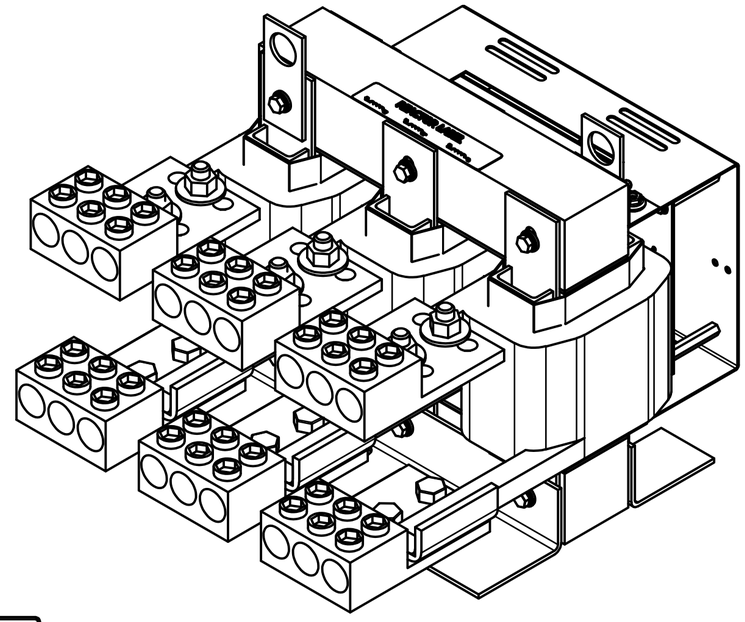

Front View

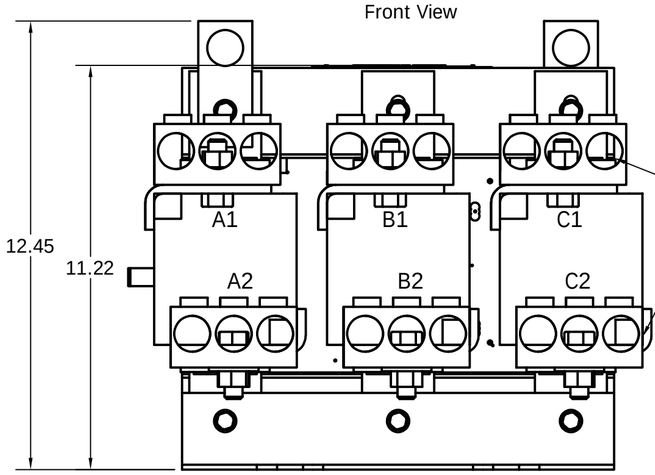

(Customer Connections)
Markings On Coil
For Reference Only.

Mounting Orientation-Up

Top Of V1K

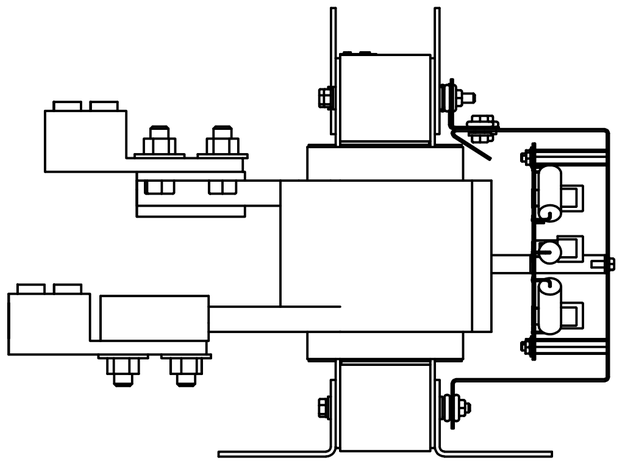

Bottom Of
V1K

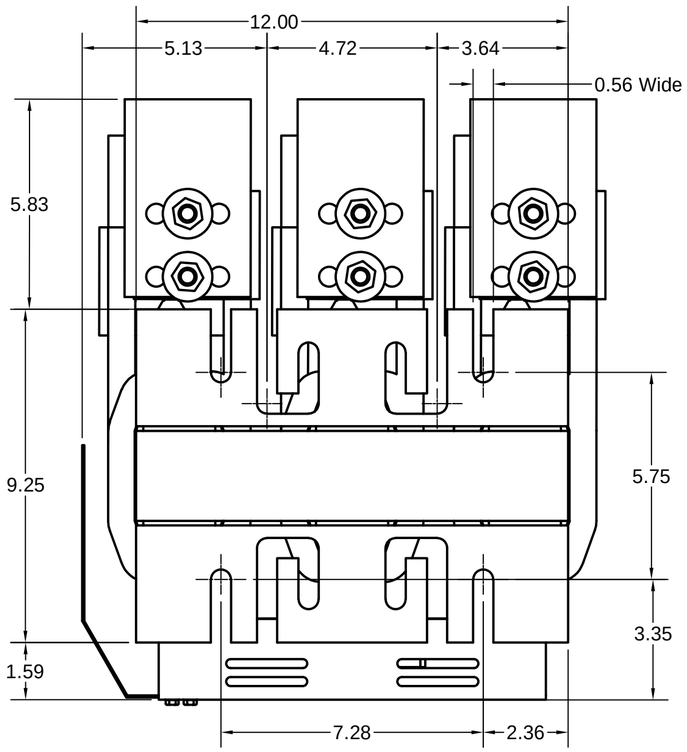

Customer Is Responsible For Installation to
Meet All National And Local Electrical Codes.

Material(s) Shall be RoHS Compliant

TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREDJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCI.

NO	REVISION	DATE	BY
1	4030, Combine V1k Drawings	6/19/17	DSW

TOLERANCES (EXCEPT AS NOTED)
DECIMAL
.XX ± .25
.XXX ± .10
FRACTIONAL
± 1/16
ANGULAR
± 1°

W132 N10611 Grant Drive
Germantown, WI 53022

V1K, Open
750 Amps

DRN. BY: DSW
DATE: 6/19/17
SCALE: TO FIT
APRVD:
SIZE: C
102660DG
SHT.1 OF 1