


HGP Part Number	HorsePower (HP)	kVar	Harmonic	Voltage (V)	HZ.	Phase
HGP0040CW3----	40	15	5th	600	60	3
HGP0050CW3----	50	15	5th	600	60	3

HGP Part Number	Schematic Drawing #	Approx Weight (LBS)
HGP0040CW3S0000	29474-4	239
HGP0040CW3C0000	29474-5	241
HGP0040CW3C000H	29475-6	245
HGP0040CWCS1000	29474-PQ1	241
HGP0040CW3C1000	29474-PQ	243
HGP0040CW3C100H	29474-PQH	247

HGP Part Number	Schematic Drawing #	Approx Weight (LBS)
HGP0050CW3S0000	29474-4	251
HGP0050CW3C0000	29474-5	255
HGP0050CW3C000H	29474-6	259
HGP0050CWCS1000	29474-PQ1	253
HGP0050CW3C1000	29474-PQ	257
HGP0050CW3C100H	29474-PQH	261

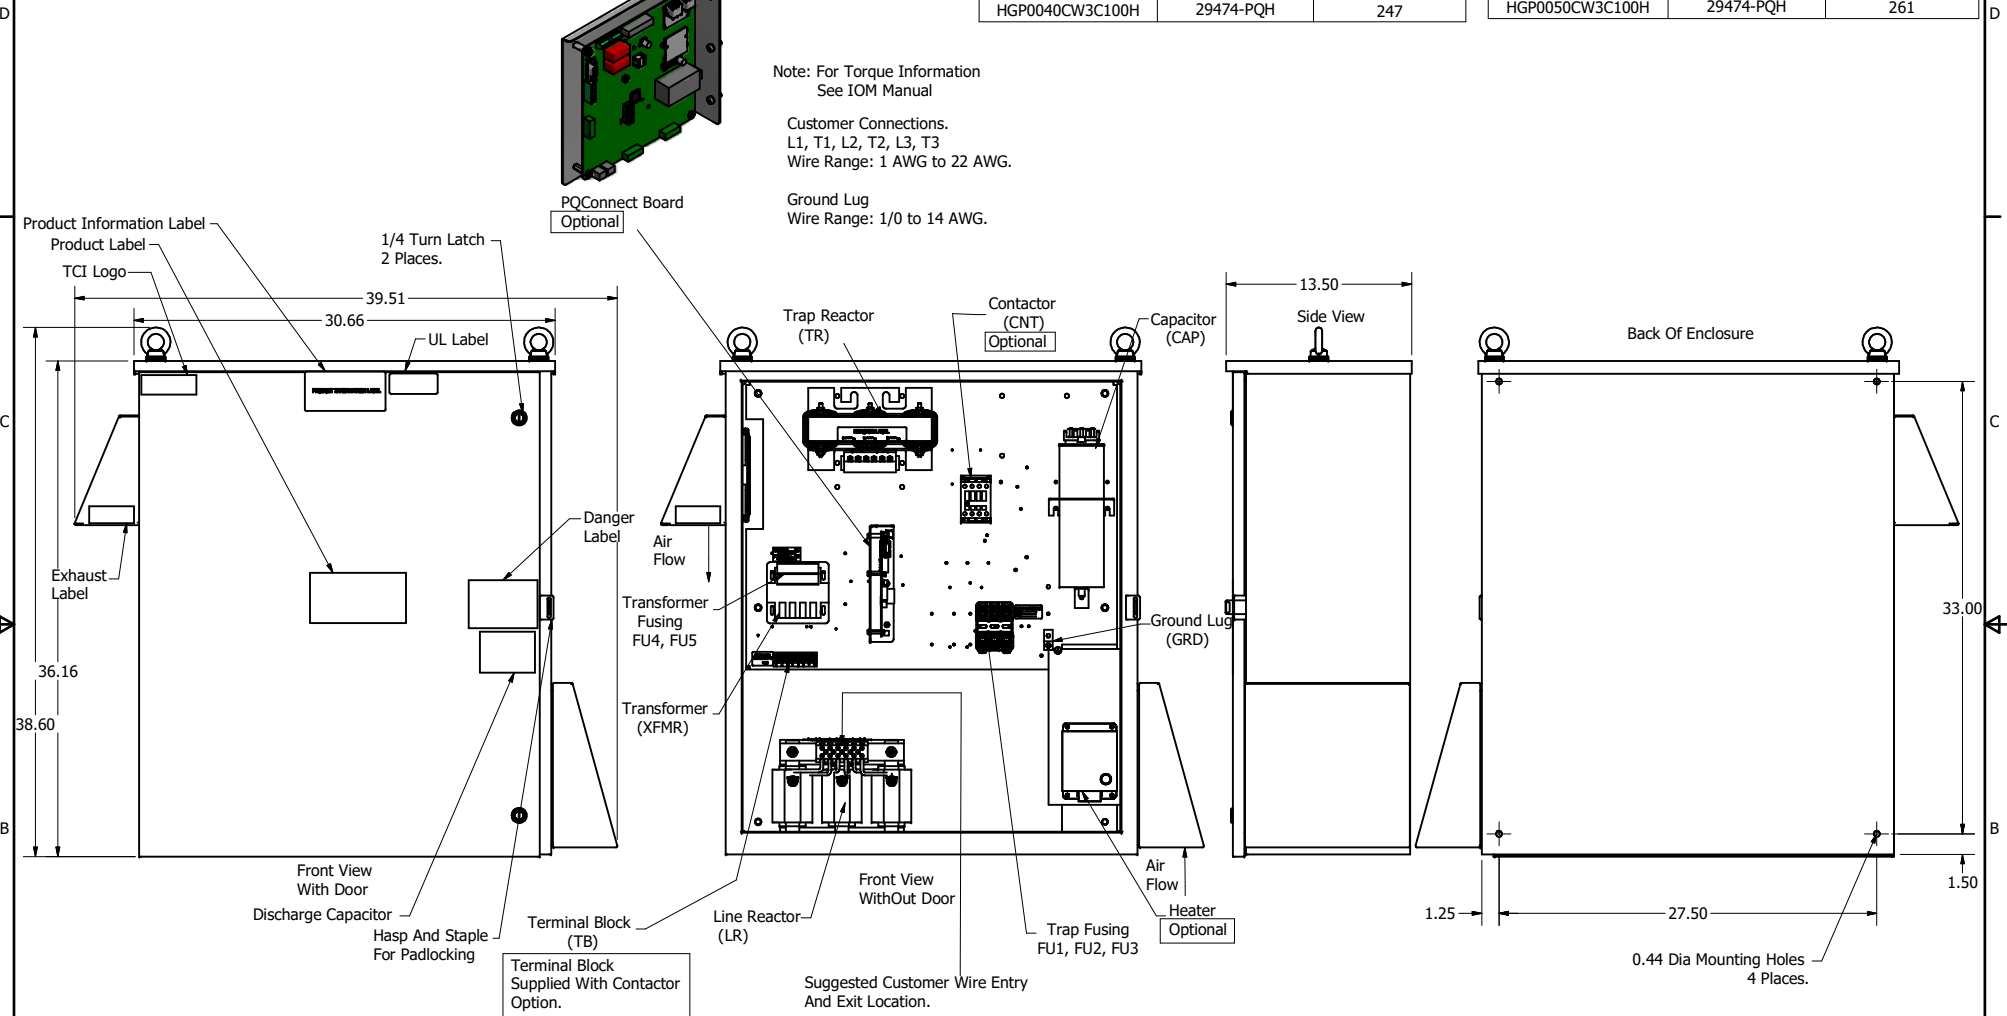

Components	HGP0040CW3----		HGP0050CW3----			
	S0000	C0000	C000H	S1000	C1000	C100H
Line Reactor (LR)	x	x	x	x	x	x
Trap Reactor (TR)	x	x	x	x	x	x
Capacitor (Cap)	x	x	x	x	x	x
Trap Fusing, FU1, FU2, FU3	x	x	x	x	x	x
Contactor (CNT)		x	x		x	x
Transformer (XFMR)	x	x	x	x	x	x
XFMR Fusing, FU4, FU5	x	x	x	x	x	x
Heater			x			x
PQConnect Board				x	x	x

NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY WITH UL514B FOR TYPE 3R ENCLOSURES

Customer Is Responsible For Installation to Meet All National And Local Electrical Codes.

Material(s) Shall be RoHS Compliant

TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCI.			TOLERANCES (EXCEPT AS NOTED) DECIMAL .XX ± .25 .XXX ± .10 FRACTIONAL ± 1/16 ANGULAR ± 1°			W132 N10611 Grant Drive Germantown, WI 53022 TCI HarmonicGuard Passive HGP, 40HP, 50HP, 600/3/60, Type 3R 105904DG		
D	S265, Enclosure Updated	8/4/2020	DSW			DRN BY	DATE	2/10/15
C	Add PQConnect	8/31/18	DSW			SCALE	1/8	DRN BY
NO	REVISION	DATE	BY			SCALE	1/8	DRN BY