
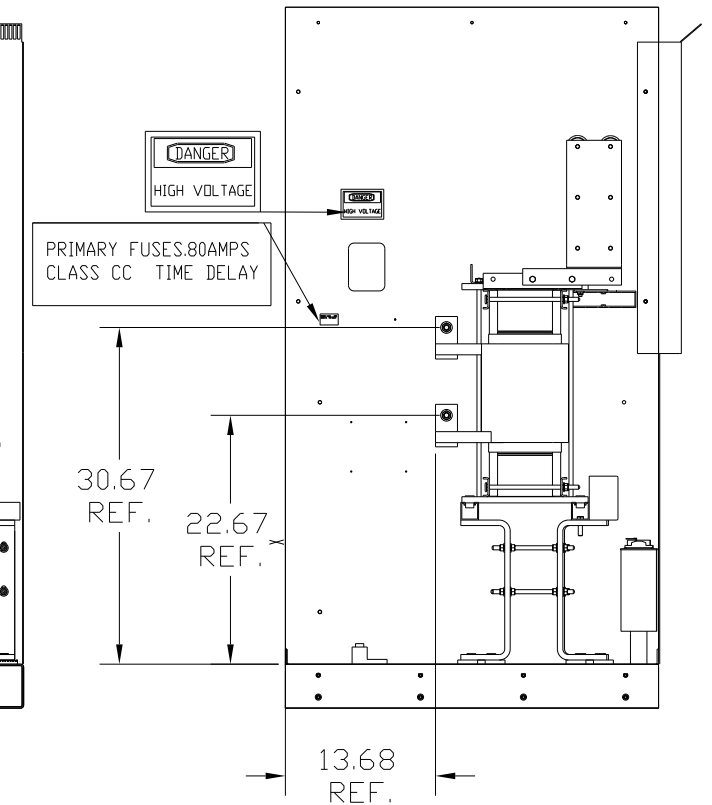
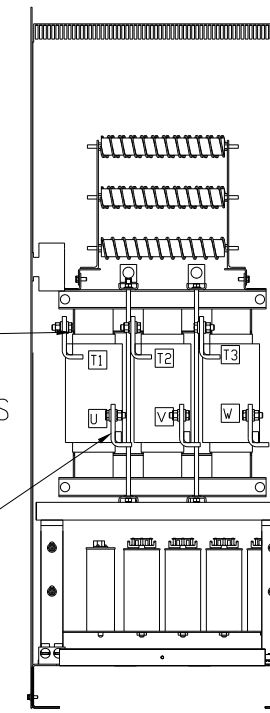
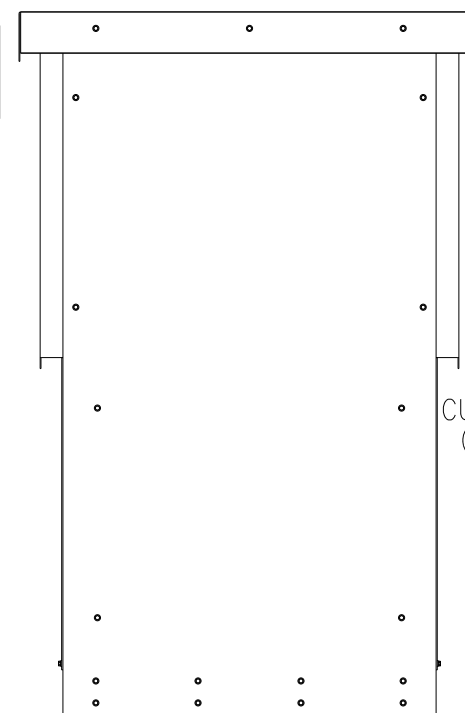
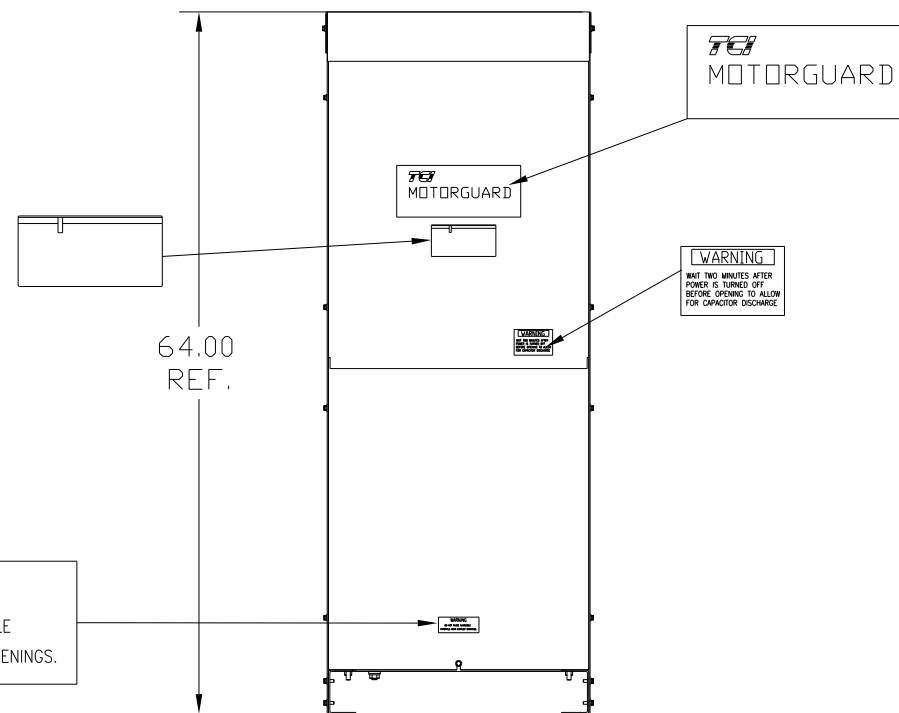


GENERAL PURPOSE, 1/3R, COLOR: GREY.


APPROX WT: 810LBS

PART NUMBER: KMG500G010000  
FOR SCHEMATIC SEE DWG# 26941

KMG HIGH PERFORMANCE OUTPUT FILTER	
PART NUMBER: KMG500G010000	
FLA: 500	DRAWING#: 103947DG
SYSTEM VOLTAGE: 600V	SCHEMATIC: 26941
HZ: 80	
PHASE: 3	ENCLOSURE TYPE: 1/3R
<b>MOTORGUARD</b>	

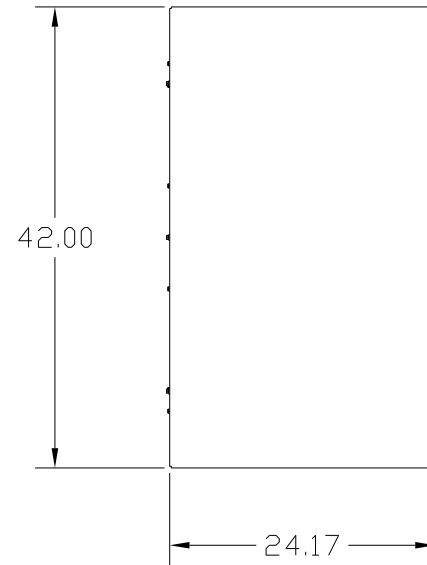

GROUND LUG  
WIRE RANGE: TWO 600MCM-2  
TORQUE: 500 LB-IN

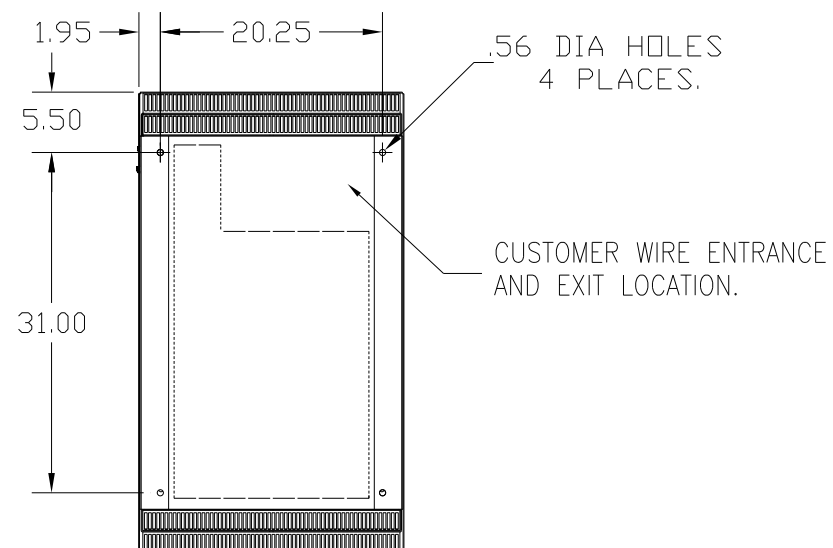

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

				TOLERANCES (EXCEPT AS NOTED)	7878 N. 86th STREET MILWAUKEE, WI 53224  KMG, LRC FILTER, STANDARD 500AMPS, 600/3/80, 1/3R
				DECIMAL	
				.XX ± .02 .XXX ± .01	
				FRACTIONAL ± 1/32	
				ANGULAR ± 1/2°	DRN. BY DSW DATE 02/05/09 DWG. NO. 103947DG
NO	REVISION	DATE	BY	SCALE TO FIT	APPRVD. SHT. 1 of 1