


4

3

2

1

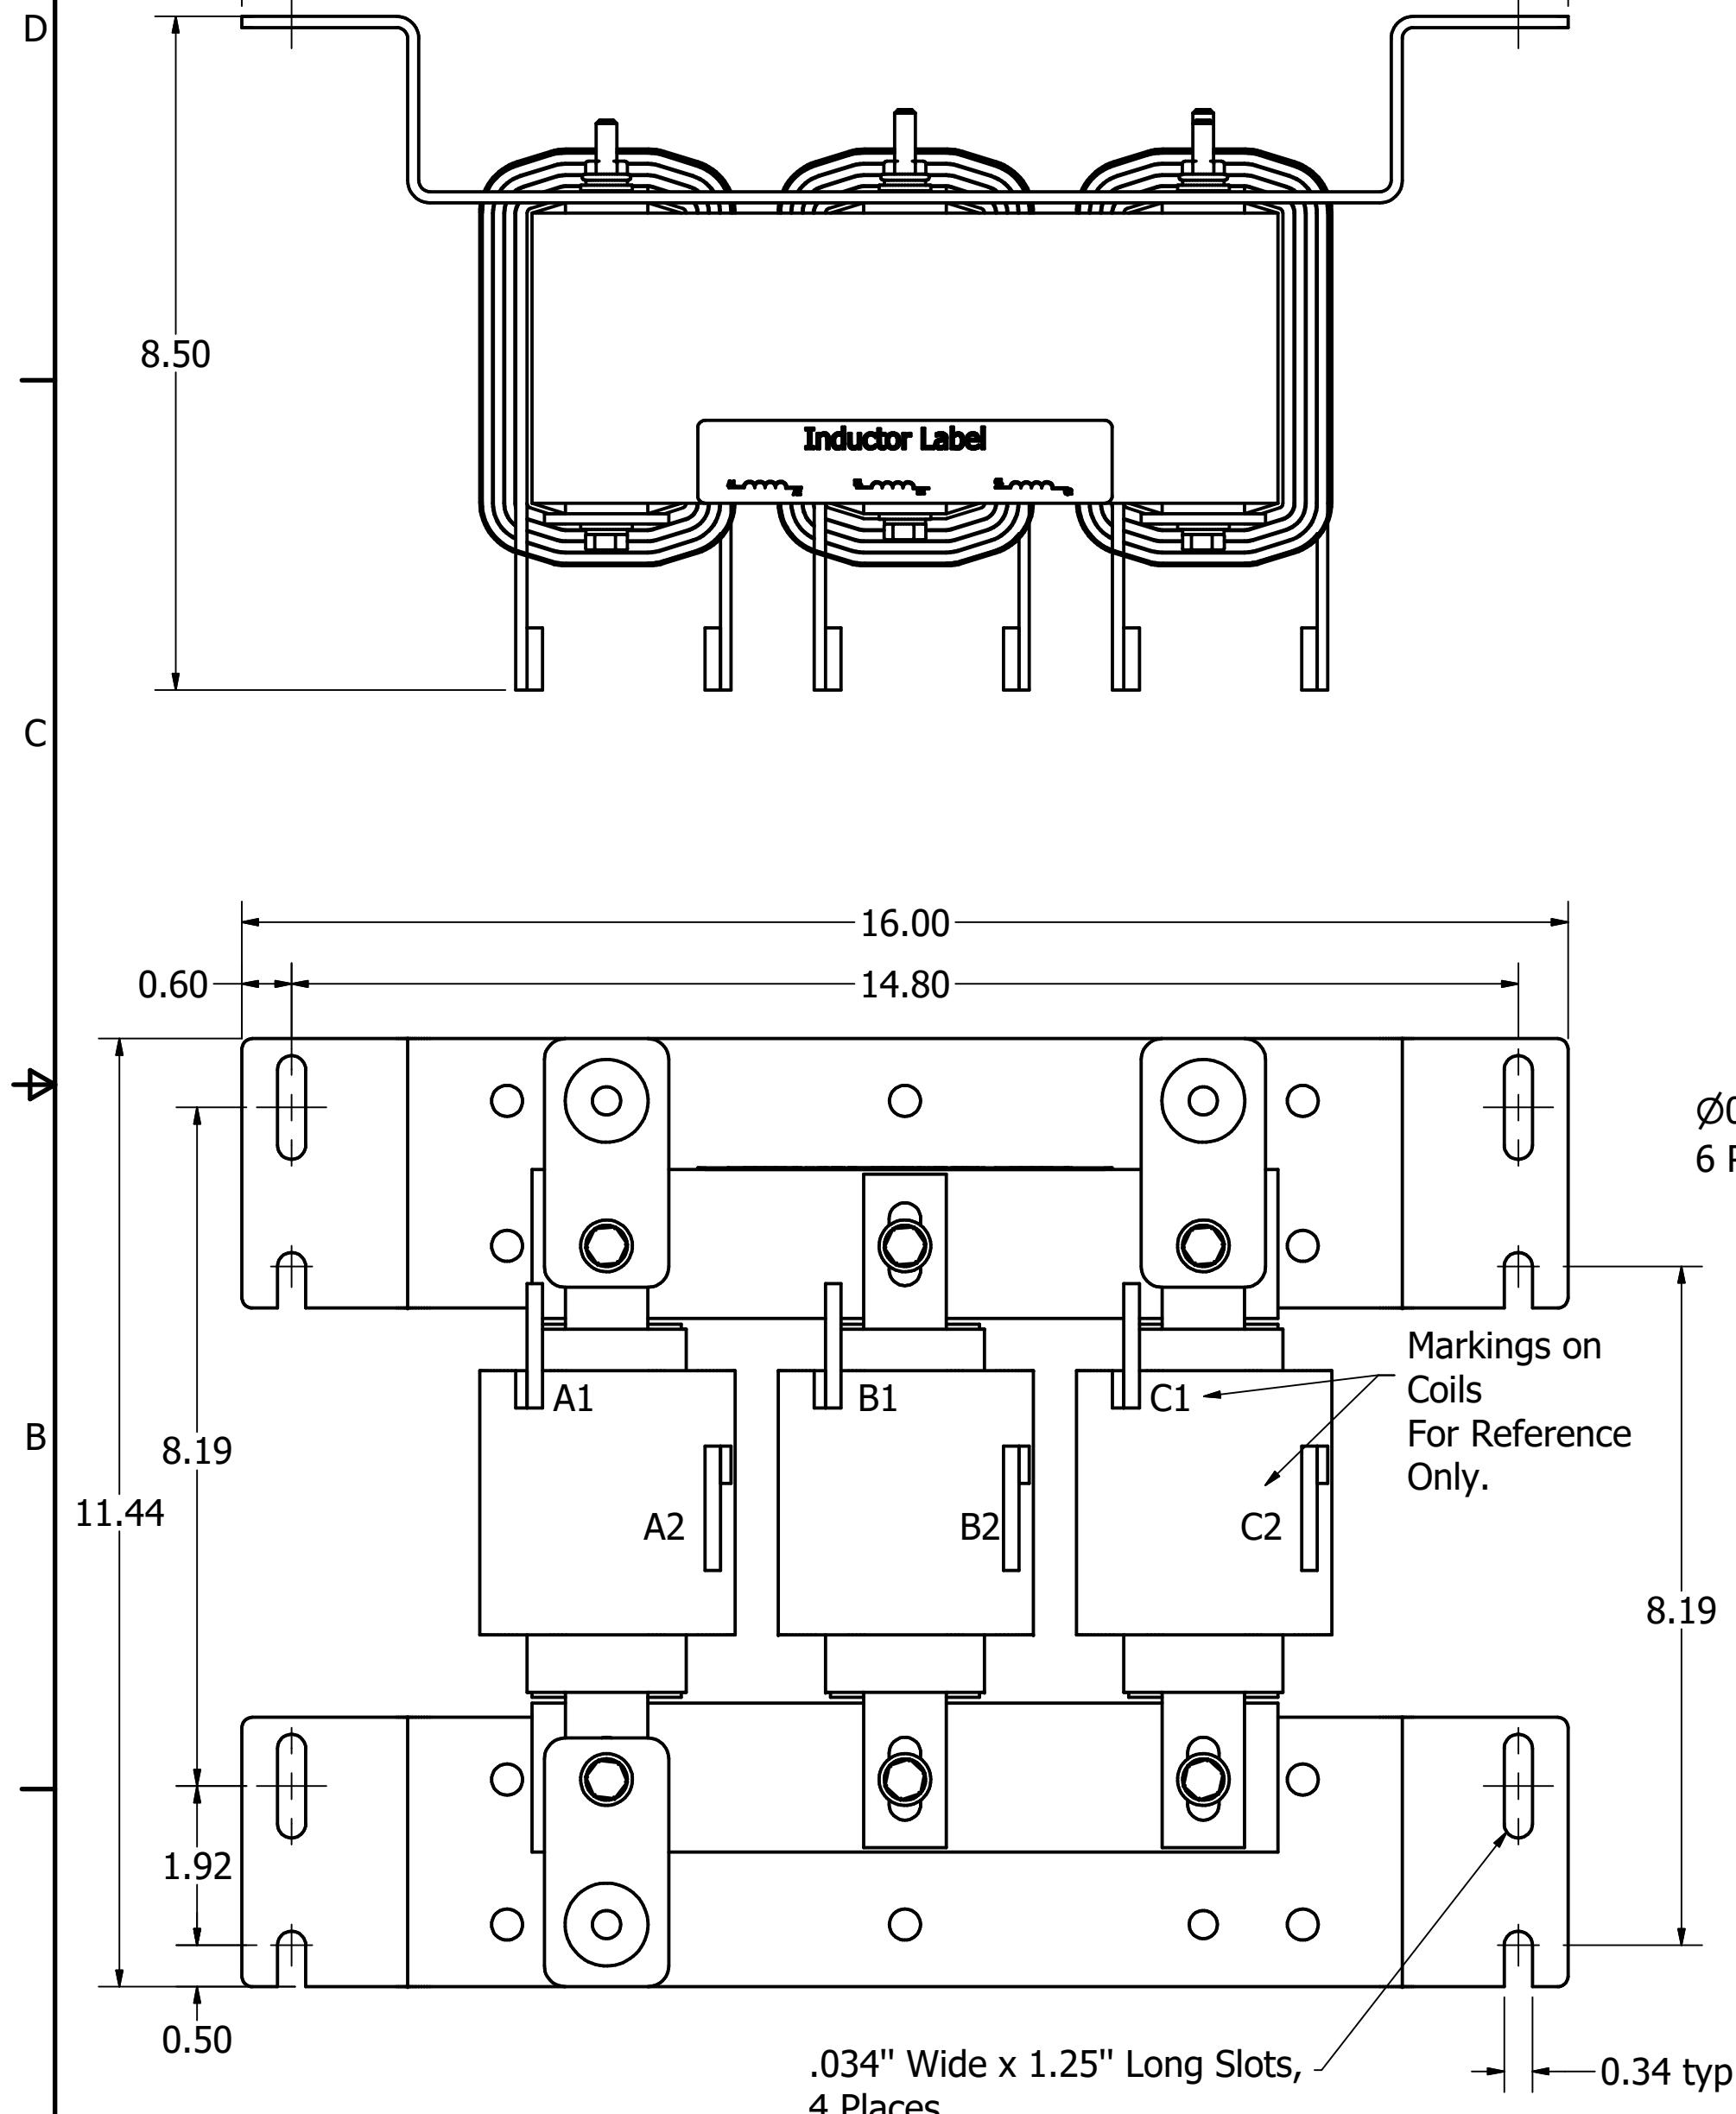

TCI Part Number

Horsepower (HP)

Amps

---uH
+8%/-2%

Weight (LBS)

KTR38L55HGX1


121

86.4

620

80

System Voltage 400V 50Hz.

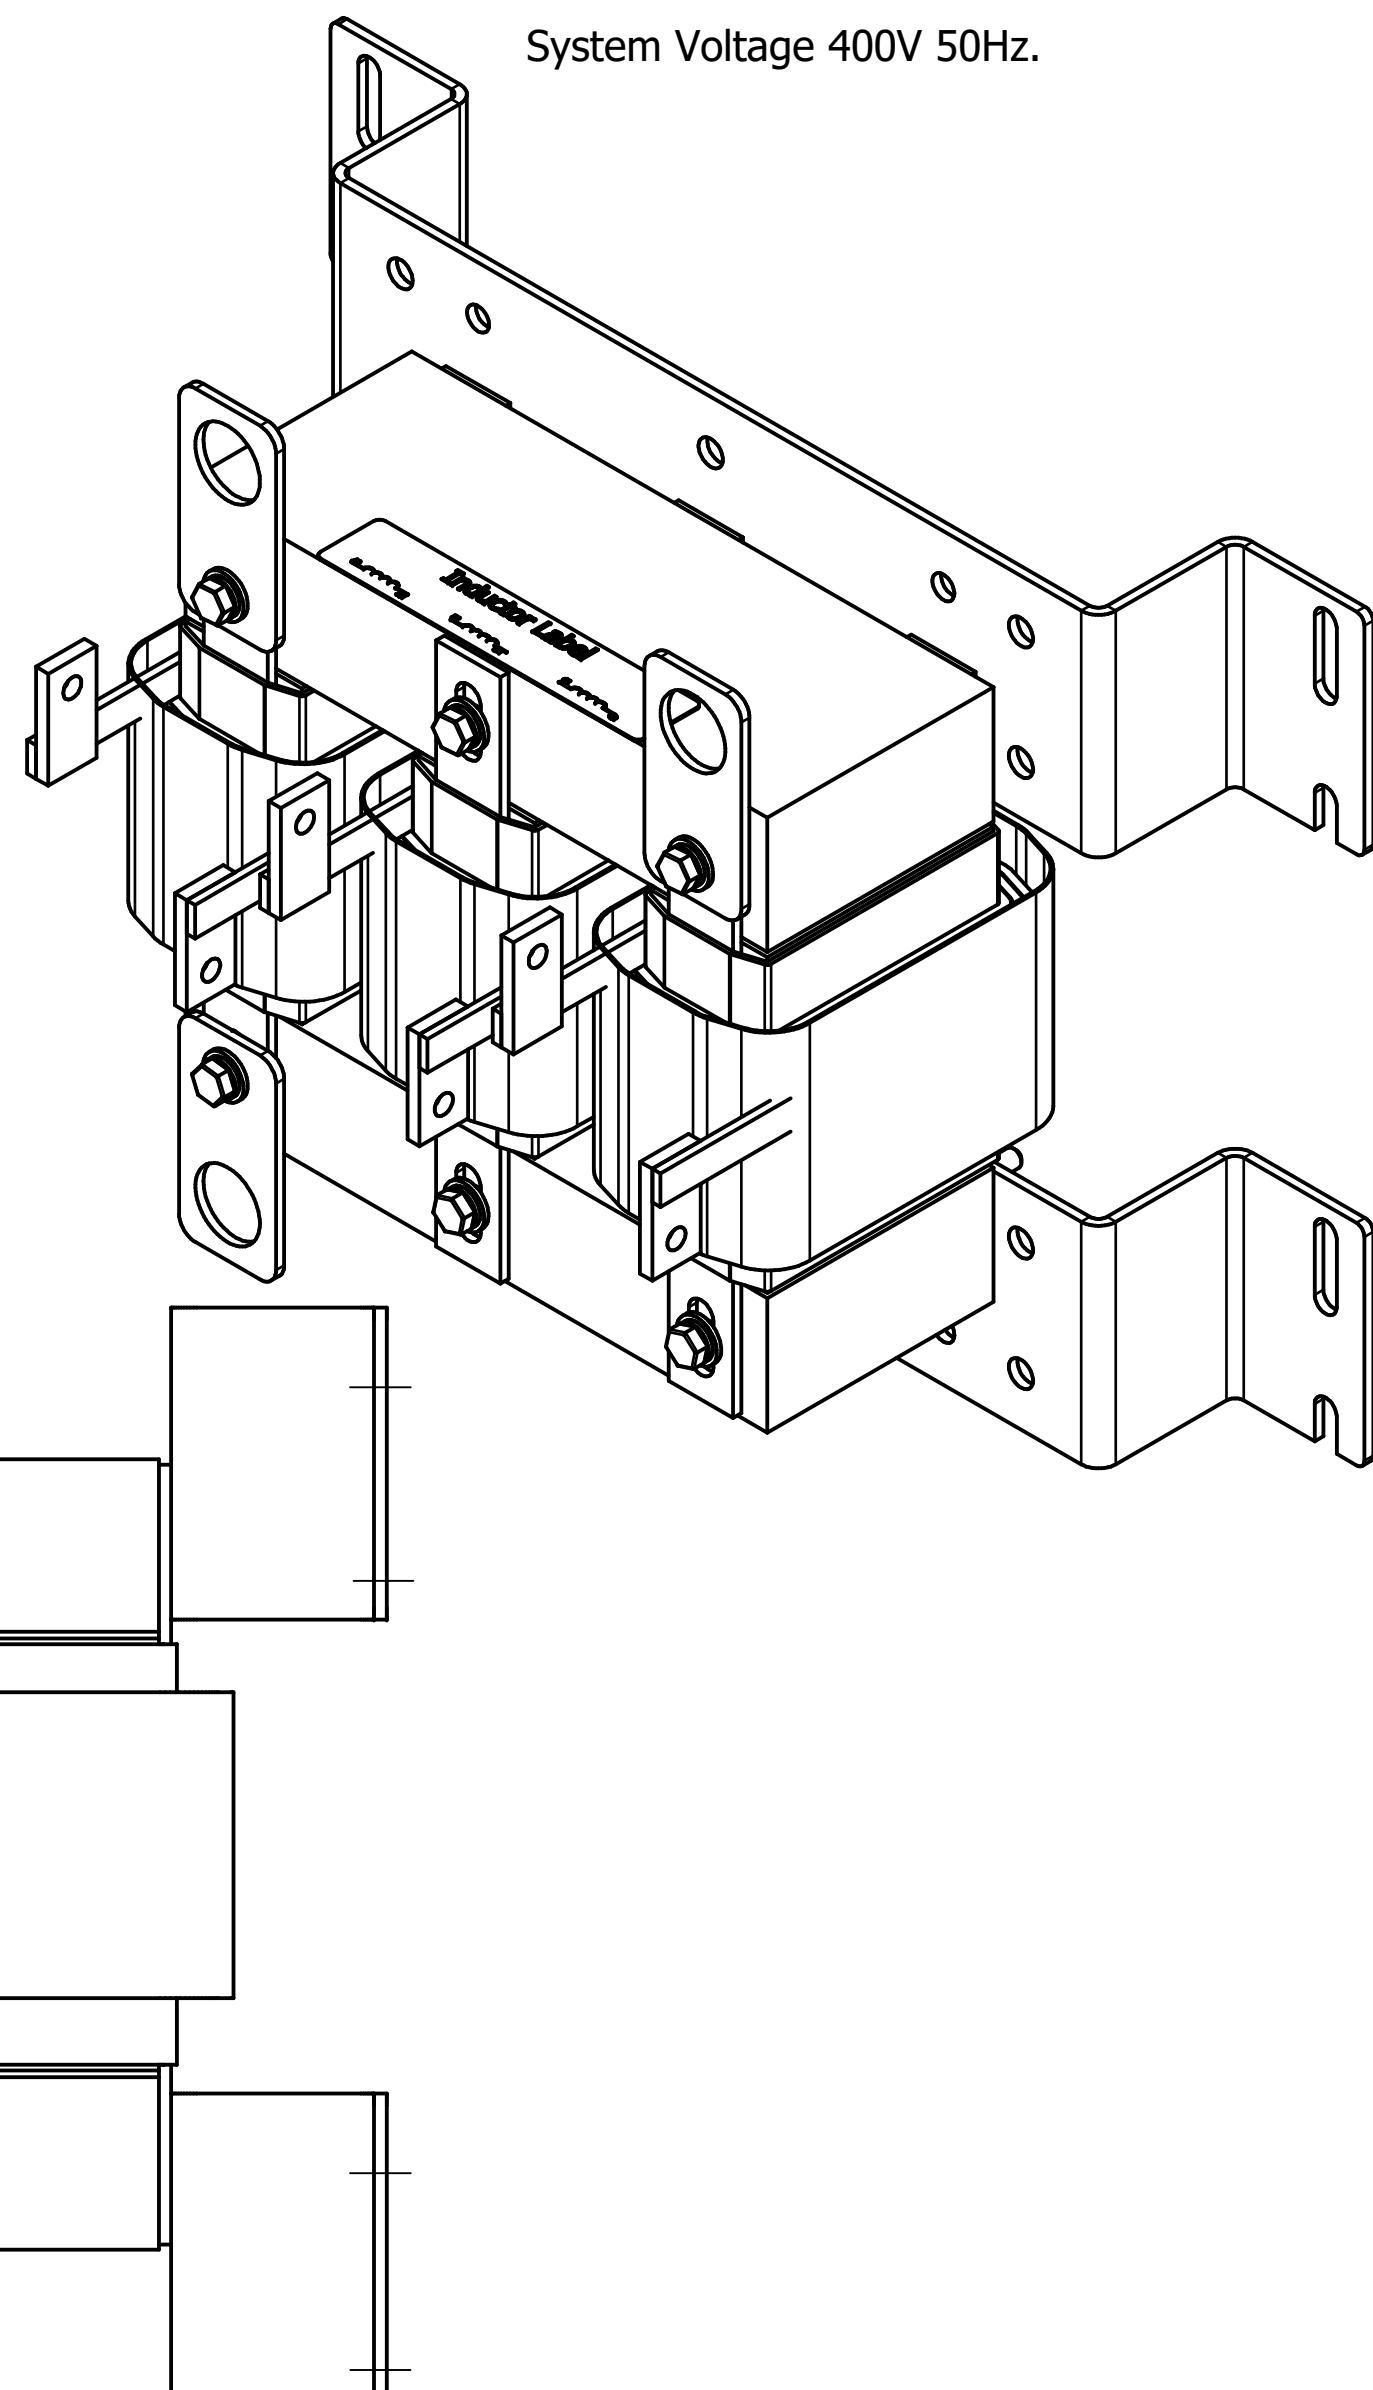

DIMENSIONS
IN INCHES
(EXCEPT AS NOTED)
TOLERANCES
(EXCEPT AS NOTED)
DECIMAL
.XX ± .03
.XXX ± .010
FRACTIONAL
± 1/32
ANGULAR
± 1°

THE INFORMATION AND DESIGNS
CONTAINED IN THIS DRAWING
ARE CONFIDENTIAL AND
THE PROPERTY OF
ALLIANT INC. AND ITS
SUBSIDIARIES. WITH THIS
DESIGN NOR ANY INFORMATION
CONTAINED IN THIS DRAWING
MAY BE REPRODUCED OR
DISCLOSED TO OTHERS WITHOUT
THE EXPRESS WRITTEN CONSENT
OF ALLIANT INC. AND
ITS SUBSIDIARIES.

A

As Designed

03/06/25

JRN

DATE BY

**Alliant
Power**

W132N10611 Grant Drive
Germantown, WI 53022
© 2025 Alliant Inc.

KTR38L55HGX1, 400V, 86.4A, 3 Phase
Open, 5th Tuning Inductor, Wall Mounted

109711DG

SHT.1 OF 1

4

3

2

1

4

2

1