

CATALOG NO	--mH $\begin{matrix} +8\% \\ -2\% \end{matrix}$	--AMPS(A)	APPROX WT-LBS
KTR40A65HG	.692	76.53	80

TCI Performance and Protection for Drives.




TRANS-COIL, INC
MILWAUKEE WI
WWW.transcoil.com
800-824-8282

KTR Tuning Reactor
CATALOG#
3PH, 60Hz, 600V Max, --- Amps
40C Amb Max, 155C Rise

UL[®] US SA[®] CE

DATE CODE A1 A2 B1 B2 C1 C2

.28 DIA HOLE
6 PLACES.

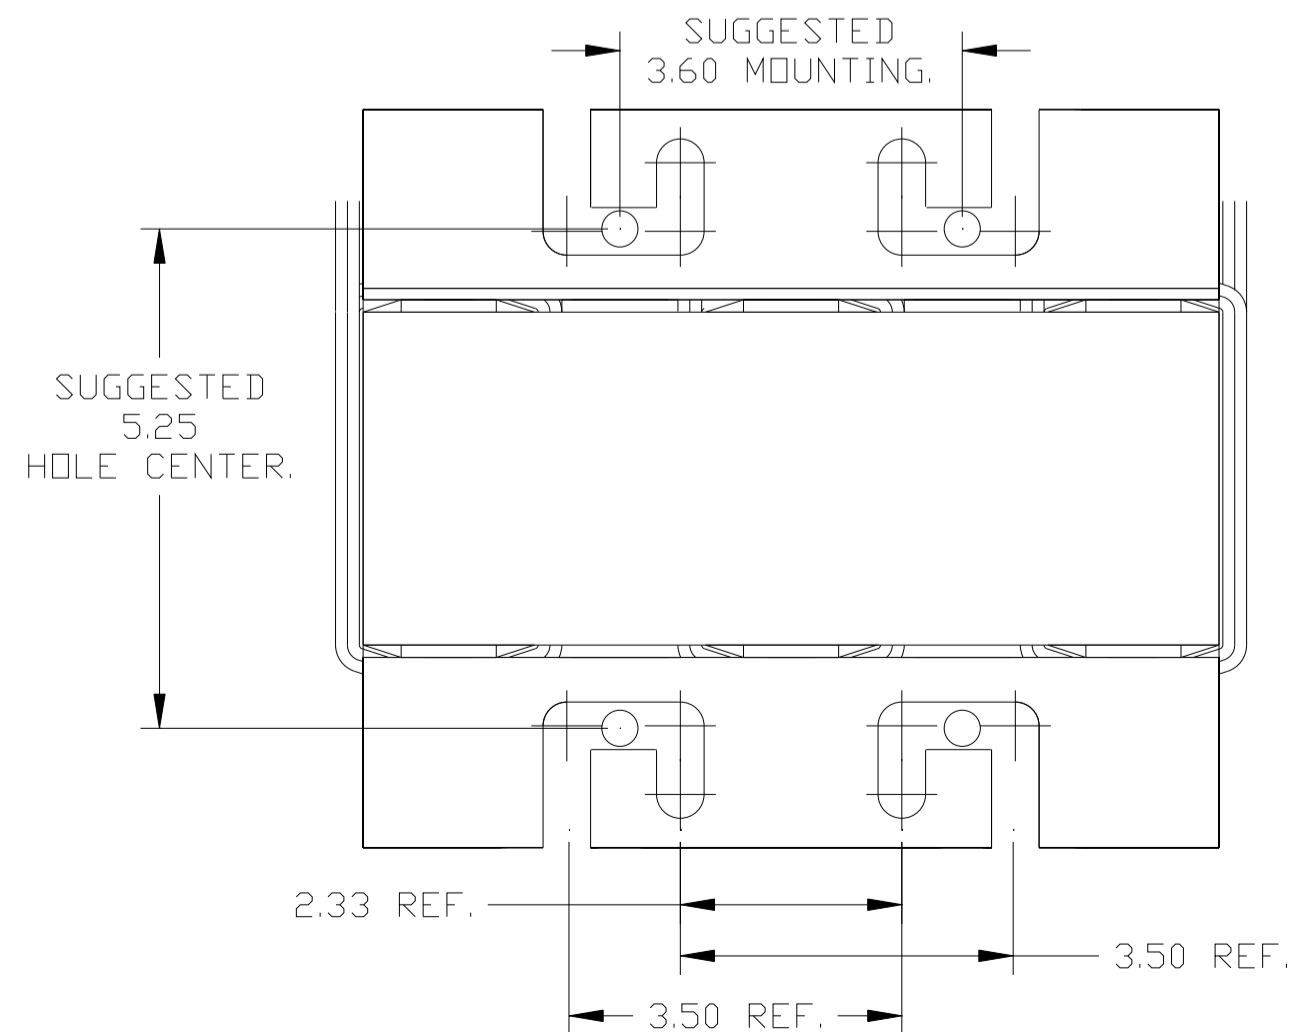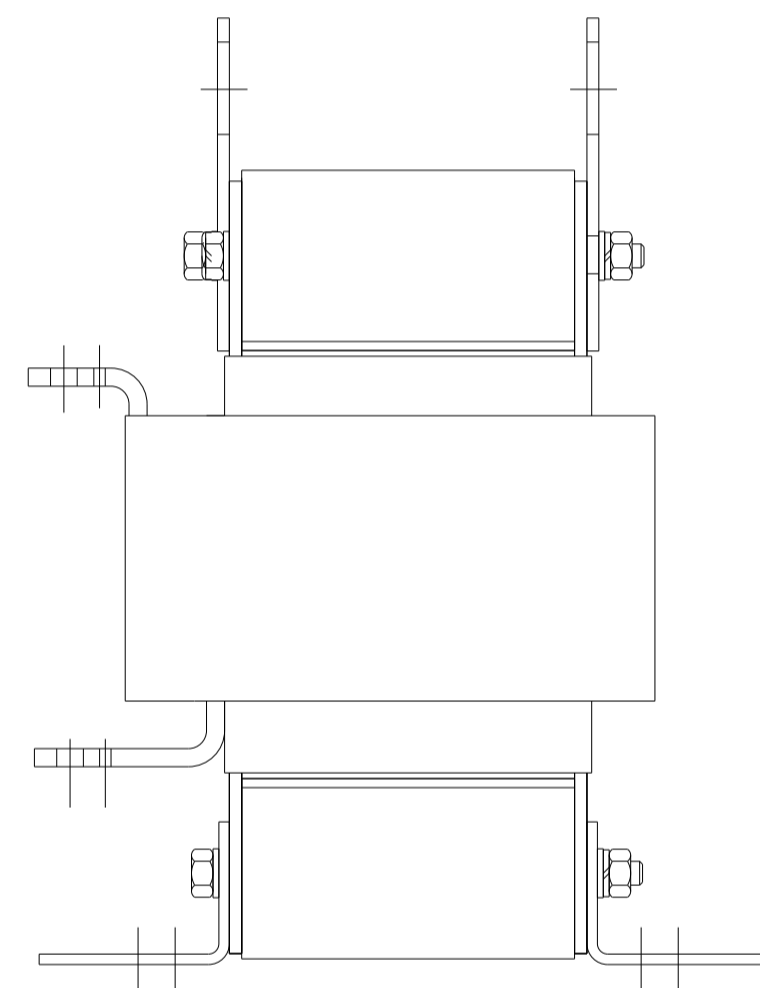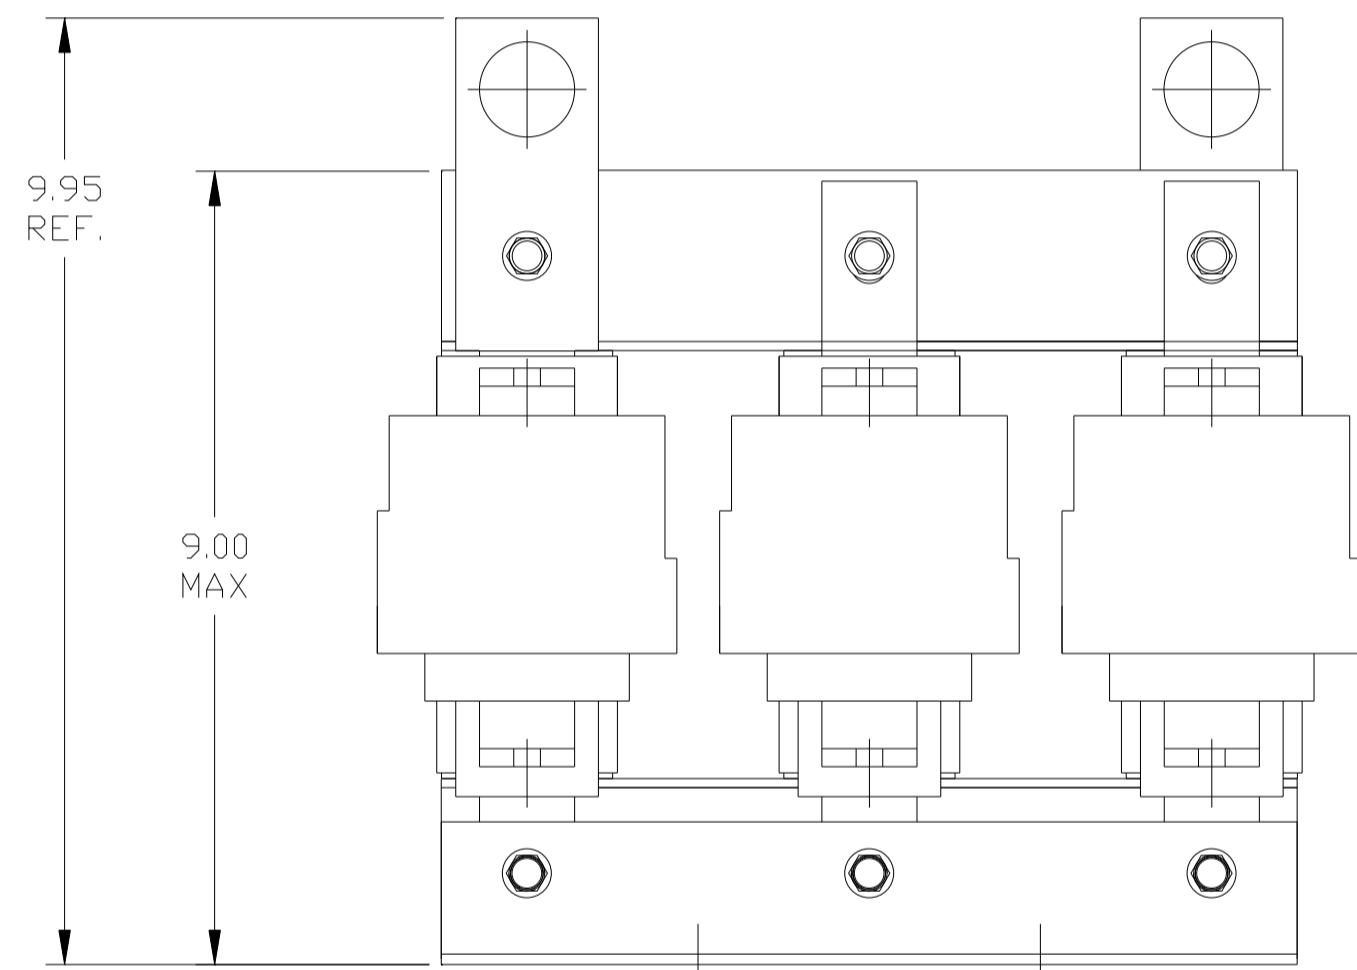

TOLERANCES (EXCEPT AS NOTED)				TCI 7878 N. 86th STREET MILWAUKEE, WI 53224	
DECIMAL				KTR40A65HG TRAP REACTOR	
.XX ± .03				76.53 AMPS, 480V, 125 HP	
.XXX ± .01				DRN BY DSW DATE 02/03/05 DWG. NO. 102298DG	
FRACTIONAL				SCALE TO FIT	
± 1/32				APRVD. C	
ANGULAR				SHT. 1 OF 1	
± 1/2°					
B 2661	ADD CE TO LABEL	3/12/10	DSW		
NO	REVISION	DATE	BY		