

CATALOG NO	--mH $\begin{matrix} +8\% \\ -2\% \end{matrix}$	--AMPS(A)	APPROX WT-LBS
KTR60C65HG	.720	91.84	120




Performance and Protection for Drives.


TRANS-COIL, INC
WWW.transcoil.com
800-824-8282

KTR Tuning Reactor
CATALOG#
3PH, 60Hz, 600V Max, [---] Amps
40C Amb Max, 155C Rise

UL US SA CE

A1 A2 B1 B2 C1 C2

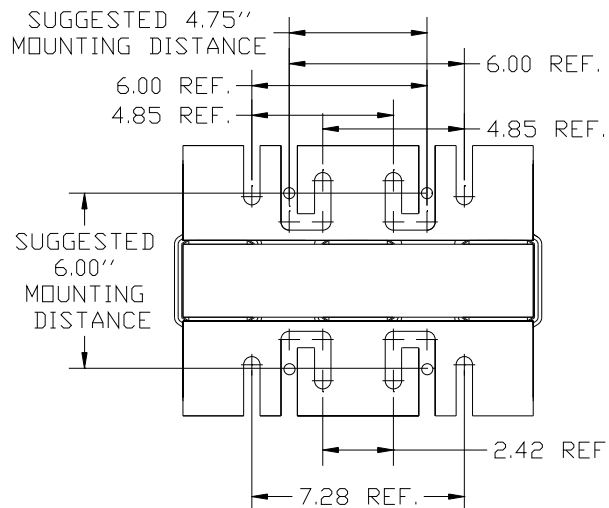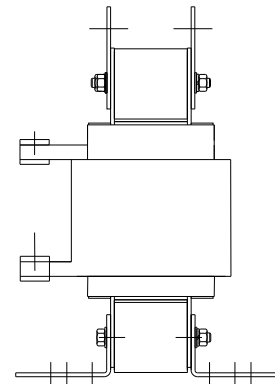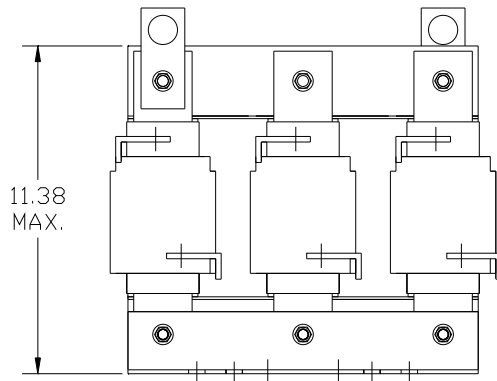

TCL, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREJUDICE TO ANY PATENT RIGHTS OF TCL AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCL.				TOLERANCES (EXCEPT AS NOTED) DECIMAL	 W132 N10611 Grant Drive Germanstown, WI 53022 TRAP REACTOR KTR60C65HG
				.XX ± .03	
				.XXX ± .01	
				FRACTIONAL ± 1/32	
	B	2661 ADD CE TO LABEL	3/15/10	DSW	DRN BY DSW
	NO	REVISION	DATE	BY	DATE 03/01/05
				ANGULAR ± 1/2°	DWG NO 102382DG
				SCALE TO FIT	SIZE SHT.1 OF1