

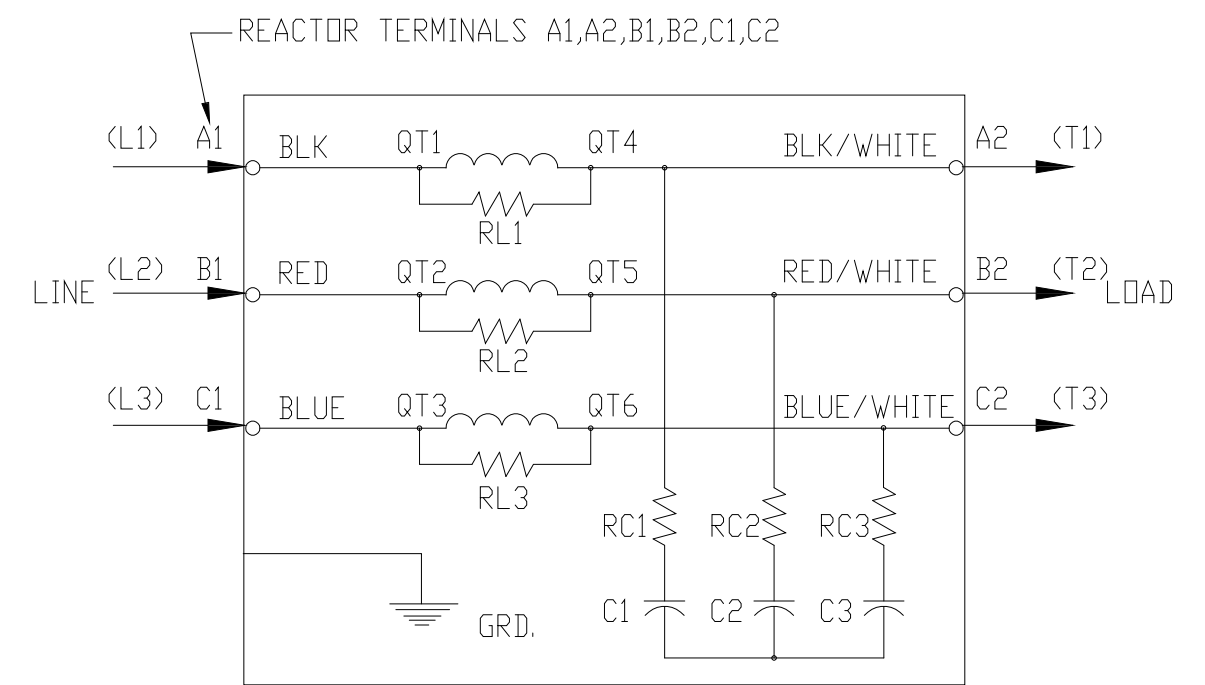
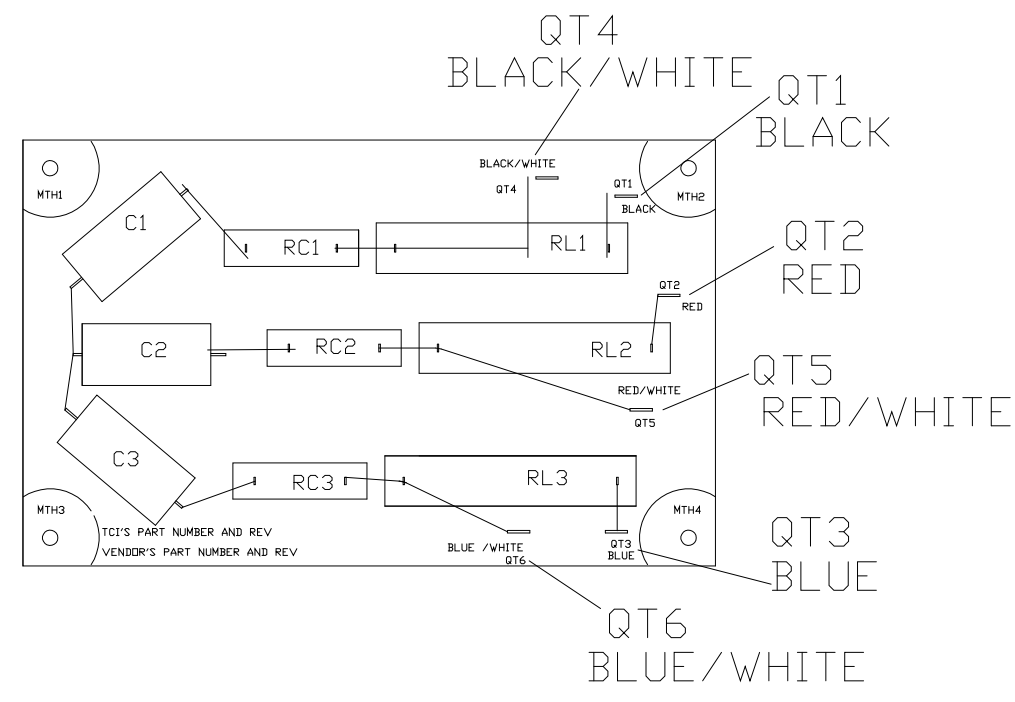
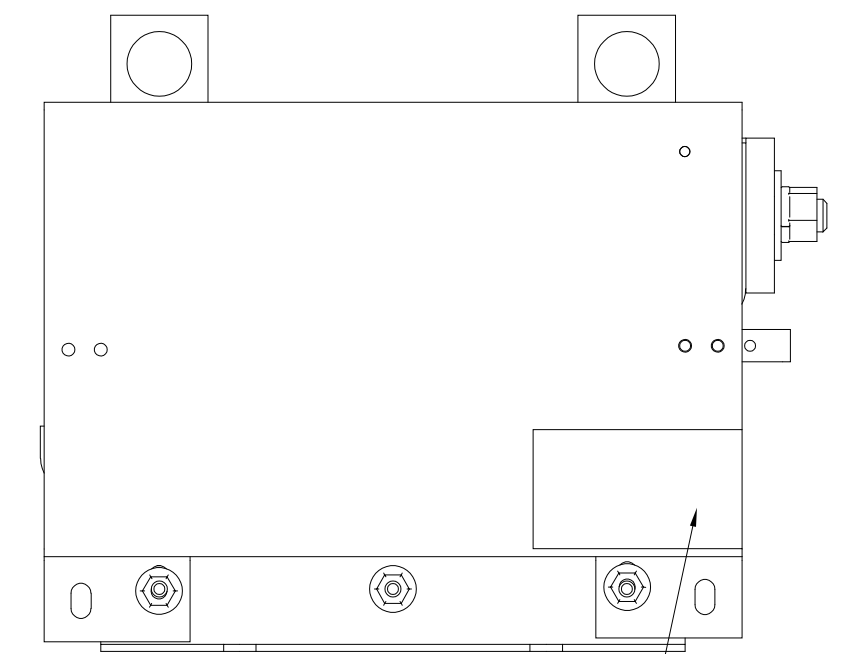


TCI Part Number	Amps (A)	Volts	Phase	Hz.	Approx Weight
V1K420A000	420	480V	3	60	95LBS

See V1K Installation Guide For Terminal Wire Size And Torque.

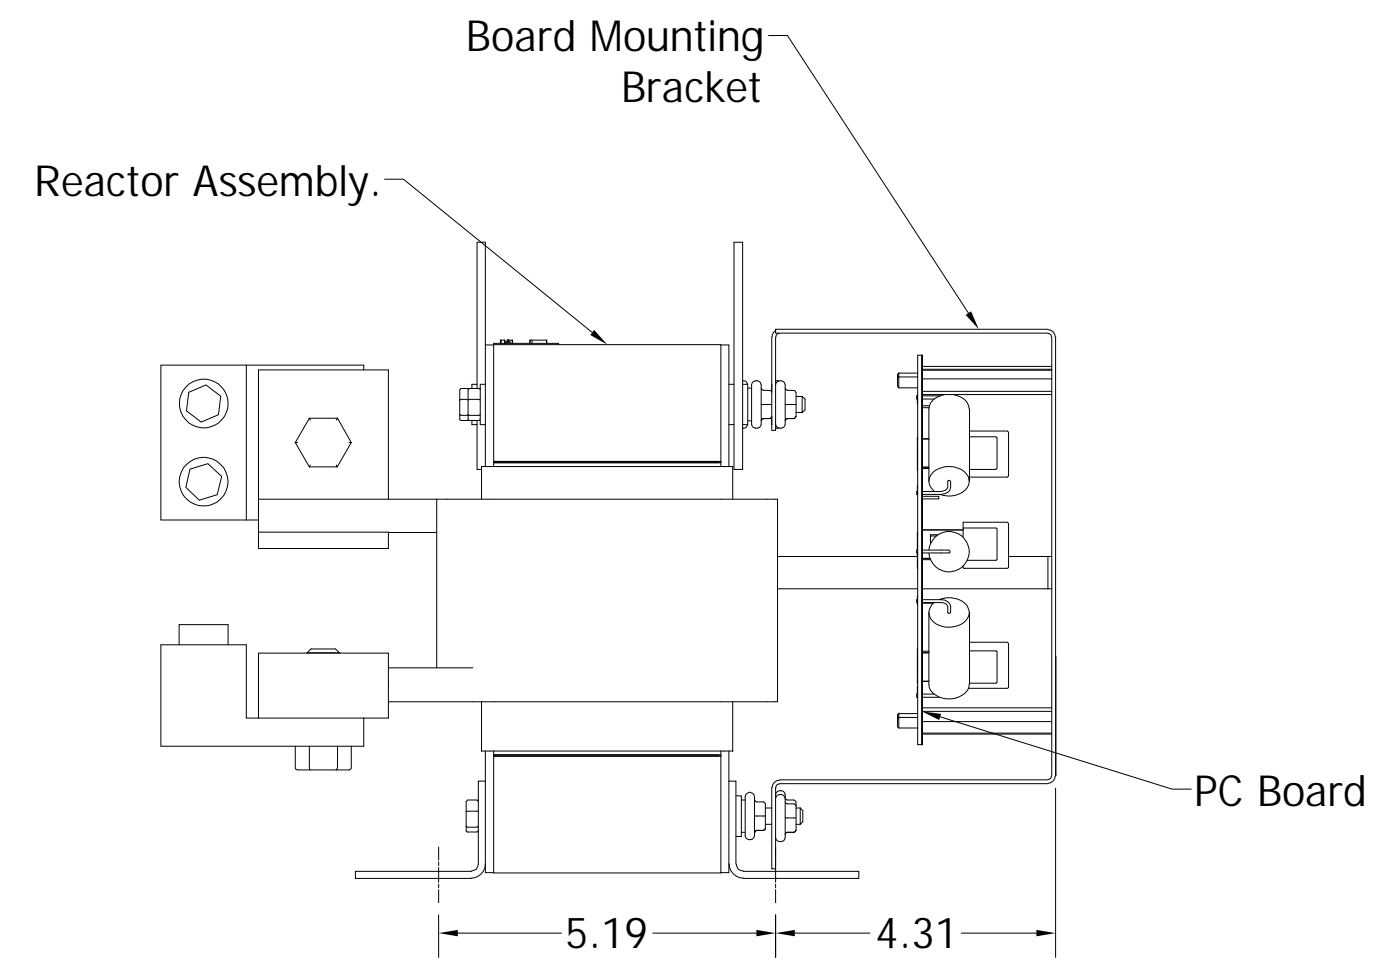

REACTOR AND BOARD ASSEMBLY CONNECTIONS

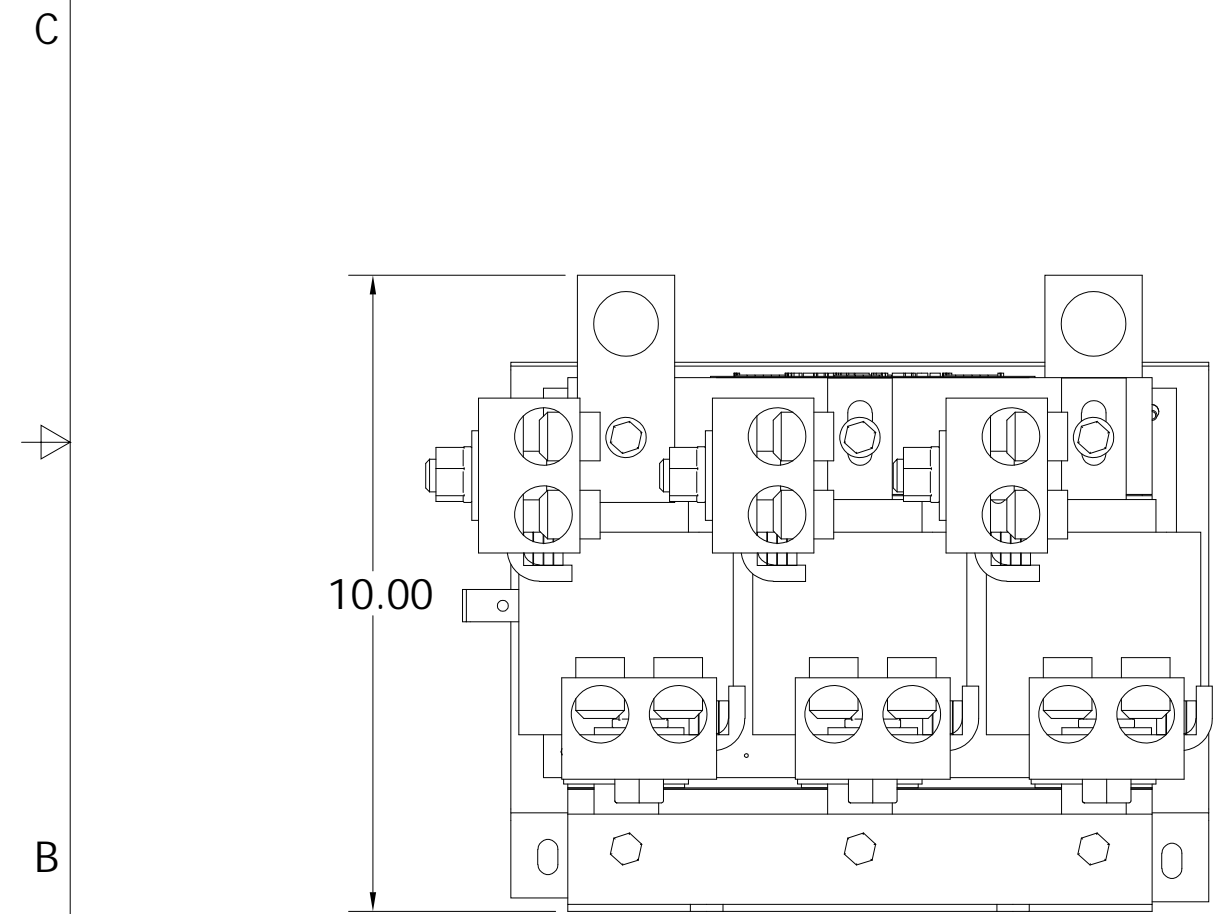

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

**Material(s) Shall be RoHS Compliant**

TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREDJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCI.

NO	REVISION	DATE	BY
G 3861	UPDATE DRAWING	3/21/17	DSW

<b>TOLERANCES (EXCEPT AS NOTED)</b> DECIMAL .XX +/- .25 .XXX +/- .10 FRACTIONAL +/- 1/16 ANGULAR +/- 1°		W132 N10611 Grant Drive Germantown, WI. 53022
V1K420A00, 480V, 420A, 3 Phase Open, dV/dT Output Filter, UL Listed		
DRN. BY DSW	DATE 5/20/05	DWG. No. 102657DG
SCALE 1/3	APRVD.	SHEET 1 OF 1

A

B

C

D

F

F

E

C

E

4

3

2

1