


575 Rated Voltage, 600 Max Voltage, Output

Part Number	Horsepower (HP)	Maximum Amps (A)	---uH+/-10%	Weight (LBS)	Losses (W)	Terminal Hole Size (Inches)
KLR250DCB	250	250	106	91	316	0.44
KLR300DCB	300	300	88	101	335	0.44

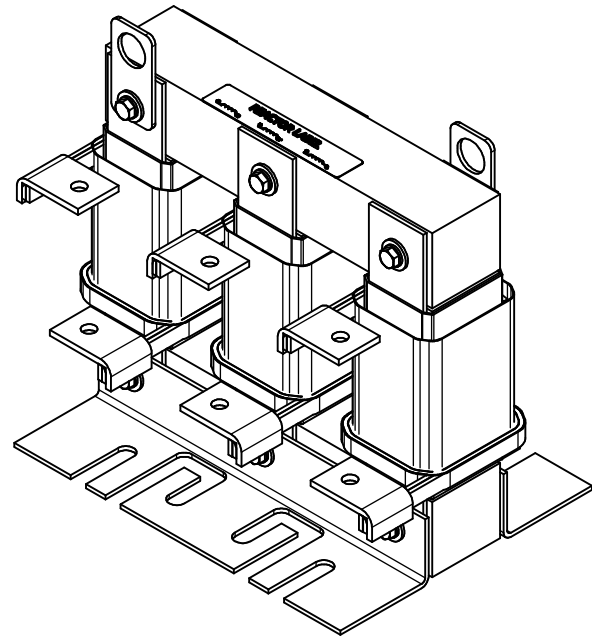

Customer Is Responsible For Installation  
To Meet All National And Local Electrical Codes.  
Material(s) Shall be RoHS Compliant

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.				TOLERANCES (EXCEPT AS NOTED)		W132N10611 (Rev 13 Feb 2024) Germantown, WI 53022 © 2024 TCI, LLC	
				DECIMAL			.XX ± .25 .XXX ± .10
NO REVISION				FRACTIONAL		An Allied Motion Company KLR Reactors L Frame	
				ANGULAR			± 1/32 ± 1°
A	6685, Drawing Was KLR-30	5/24/2024	DSW	DRN BY	DATE	5/24/2024	KLR-30-3
NO	REVISION	DATE	BY	SCALE	1/2.5	DRN BY	DATE